

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

POLLUTION CONTROL HEARINGS BOARD

STATE OF WASHINGTON

KING COUNTY,

Appellant,

v.

WASHINGTON STATE DEPARTMENT OF
ECOLOGY,

Respondent.

Case No.

NOTICE OF APPEAL

King County (“the County”) seeks review by the Pollution Control Hearings Board (“Board”) of the Department of Ecology’s (“Ecology” or “Agency”) Puget Sound Nutrient General Permit (“PSNGP” or “Permit”). The PSNGP was issued on December 1, 2021, under the Clean Water Act (“CWA” or “Act”), 33 U.S.C. §§ 1251 *et seq.*, and RCW 90.48. This Notice of Appeal is timely, as it is filed within thirty (30) days of issuance of the PSNGP.

1. Name and Address of Appellants and Representatives

Appellants in this matter are:
King County
Department of Natural Resources and Parks
Director’s Office
King Street Center
201 S. Jackson St. Suite 5700
Seattle, WA 98104-3855

1 Appellants are represented by:

2 Beth Ginsberg
3 Stoel Rives LLP
4 600 University Street, Suite 3600
5 Seattle, WA 98101
6 (206) 386-7581

7 Michael Campbell
8 Stoel Rives LLP
9 760 SW 9th Ave, #3000
10 Portland, OR 97204
11 (503) 294-9676

12 Verna P. Bromley
13 Michael Graves
14 King County Prosecuting Attorney's Office
15 1191 2nd Avenue, Suite 1700
16 Seattle, WA 98101
17 (503) 294-9676

18 **2. Name of the Agency Whose Decision is Being Appealed**

19 Respondent is the Washington State Department of Ecology, an agency of the State of
20 Washington.

21 **3. Action Appealed**

22 King County hereby appeals Ecology's December 1, 2021, PSNGP, a general National
23 Pollutant Discharge Elimination System ("NPDES") permit and State Waste Discharge Permit
24 issued under Chapter 90.48 RCW and the CWA, 33 U.S.C. §§ 1251 *et seq.* The PSNGP
25 becomes effective on January 1, 2022, and expires on December 31, 2026.

26 The County's appeal challenges the PSNGP and the applicability of the PSNGP to four of
the County's individual wastewater treatment plants ("WWTPs" or "Plants"). These WWTPs
are: (1) King County Brightwater WWTP, which is authorized to discharge "treated domestic
wastewater to Puget Sound" pursuant to individual NPDES permit number WA0032247, and
which expires on February 28, 2023; (2) King County South WWTP, which is authorized to
discharge "treated municipal wastewater to the Puget Sound" pursuant to individual NPDES

NOTICE OF APPEAL - 2

1 permit number WA0029581, and which nominally expired on July 31, 2020 but which remains
2 in effect pending Ecology’s final action on the County’s pending permit renewal application, *see*
3 WAC 173-220-180(5); (3) King County West Point WWTP, which is authorized to discharge
4 “treated municipal wastewater” to Puget Sound pursuant to individual NPDES permit number
5 WA00029181, and which nominally expired on January 31, 2020 but which remains in effect
6 pending Ecology’s final action on the County’s pending permit renewal application; and (4)
7 King County Vashon WWTP, which is authorized to discharge “treated domestic wastewater to
8 the Puget Sound” pursuant to individual NPDES permit number WA0022527, and which expires
9 on February 28, 2022 but which will remain in effect thereafter until Ecology takes final action
10 on the County’s pending permit renewal application.

11 Because Ecology has concluded that discharges of nutrients from domestic WWTPs
12 (including the County’s four Plants identified above) are causing or contributing to violations of
13 the applicable dissolved oxygen (“DO”) water quality standard (“WQS”) in certain areas of
14 Puget Sound, the PSNGP regulates discharges of Total Inorganic Nitrogen (“TIN”) from these
15 WWTPs to the Washington Waters of the Salish Sea. The PSNGP identifies three of the
16 County’s four WWTPs as discharging “dominant TIN loads” and applies to them the
17 requirements for dominant loaders in Special Conditions S4, S7.A, and S9.A¹ In addition to
18 challenging Ecology’s determination that each of the County’s four WWTPs are required to seek
19 coverage under the PSNGP, this appeal also challenges the PSNGP itself, as described more
20 fully below.

21
22
23 _____
24
25 ¹ The PSNGP identifies King County’s Vashon WWTP as having a “small TIN load” and applies
26 to it the requirements for small loaders set forth in PSNGP Special Conditions S6, S7.C, and
S9.E.

1 **4. Statement of the Legal and Factual Grounds for the Appeal**

2 **A. Federal and State NPDES Permit Regulations Prohibit Ecology from**
3 **Requiring Coverage under a General NPDES Permit**

4 PSNGP Condition S2 requires the County to apply for and obtain coverage under the
5 PSNGP for each of the four County WWTPs identified in the PSNGP. No provision of the
6 PSNGP allows the County to decline coverage under the PSNGP. Both EPA's and Ecology's
7 regulations, however, provide that any discharger eligible for coverage under a general NPDES
8 permit may decline such coverage by obtaining an individual NPDES permit. *See* 40 C.F.R.
9 § 122.28(b)(3); WAC 173-226-080(3)-(4), -240(4); *see also* WAC 173-226-200(1) (general
10 permit coverage available only to dischargers "who desire to be covered under the general
11 permit"). Each of the four County WWTPs has an individual NPDES permit that authorizes
12 discharges of treated wastewater subject to the conditions of those permits, including discharges
13 of the nutrients that would be authorized by the PSNGP. Because the PSNGP violates these
14 regulations, the PSNGP should be invalidated insofar as it requires the listed facilities, including
15 the County's four facilities, to apply for and obtain coverage under the PSNGP.

16 **B. Federal and State NPDES Permit Regulations Prohibit Ecology from**
17 **Regulating the Same Discharge under Both a General and an Individual**
18 **NPDES Permit**

18 The PSNGP is unlawful because the nutrient discharges that it authorizes and regulates
19 are also authorized and regulated by the 58 facilities' individual NPDES permits, including those
20 for the four County WWTPs. Ecology's Fact sheet explains that

21 Ecology currently issues individual NPDES permits to municipal
22 wastewater treatment plants. The PSNGP addresses the discharge
23 of nutrient pollution from POTWs that hold an existing, individual
NPDES permit.

24 Fact Sheet at 2. Both EPA's and Ecology's regulations prohibit regulating the same discharge
25 under both a general and an individual NPDES permit. *See* 40 C.F.R. § 122.28(a)(1), (b)(3)(iv),
26 (v); WAC 173-226-080(4), -200(7). Indeed, when an individual permit is issued for a discharge,

1 the regulations provide that the coverage under the general permit is “automatically terminated.”
2 40 C.F.R. § 122.28(b)(3)(iv); WAC 173-226-080(4). The reason for this prohibition is that dual
3 permit coverage creates abundant opportunities for ambiguous, duplicative, or inconsistent
4 permit requirements. Because discharges from the County’s four WWTPs that are required to
5 obtain coverage under the PSNGP are already fully authorized by individual NPDES permits,
6 Ecology cannot require coverage for and regulate the same discharges under the PSNGP. The
7 PSNGP is therefore unlawful and should be invalidated accordingly.

8 **C. The PSNGP Impermissibly Modifies the County’s Individual NPDES**
9 **Permits**

10 The individual NPDES permits for the four County WWTPs that are subject to the
11 PSNGP authorize discharges of treated wastewater to Puget Sound, including nutrients. The
12 PSNGP imposes substantial additional requirements on these authorized discharges, which
13 impermissibly modifies the requirements of the individual permits without adhering to the
14 NPDES permit modification procedures mandated by the applicable federal and state NPDES
15 permitting regulations.

16 Individual permits can only be modified for one of the 18 enumerated causes specified in
17 40 C.F.R. § 122.62; *see also* WAC 173-220-150(1)(d), -190(1). None of these causes is
18 identified in the PSNGP as a facility-specific reason for modifying the individual NPDES
19 permits for the County’s four WWTPs. Moreover, the individual NPDES permits for two of the
20 WWTPs, South and West Point, have expired and therefore cannot be modified, only renewed.
21 *See* 40 C.F.R. § 122.46(b); 49 Fed. Reg. 37,998, 38,045 (Sept. 26, 1984).

22 In any event, even if Ecology could modify the individual NPDES permits and had
23 appropriate cause to do so, Ecology should have prepared draft permits addressing the individual
24 permit modifications and should have provided public notice and an opportunity for comment on
25 each of the individual proposed permit modifications for the County’s four WWTPs. *See* 40
26

1 C.F.R. §§ 124.5(c)(1), 124.6(d), 124.10(a)(1)(ii), (b)(1), (d)(1); WAC 173-220-190(3). Ecology
2 did not do so.

3 Because the PSNGP modifies the requirements of the individual NPDES permits for the
4 58 facilities subject to the PSNGP, including the County's four WWTPs, by imposing additional
5 NPDES permit requirements on the discharges from those facilities, and because Ecology failed
6 to comply with the permit modification procedures established by EPA's and Ecology's NPDES
7 permit regulations, the PSNGP should be invalidated.

8 **D. Because the PSNGP Finds That Existing Discharges Subject to the PSNGP**
9 **Are Causing or Contributing to DO WQS Violations, Yet Also Presumes**
10 **That Those Same Discharges Comply with Water Quality Standards,**
11 **PSNGP Condition S3 and the Permit as a Whole Are Unreasonable and**
12 **Unlawful**

13 Condition S3.A prohibits discharges that cause or contribute to violations of water quality
14 standards. The animating factor that led Ecology to issue the PSNGP and require the 58
15 dischargers subject to the Permit to seek coverage is Ecology's determination that each of those
16 individual WWTPs is causing or contributing to violations of the DO WQS by discharging TIN
17 *at its current levels*. More specifically, the Fact Sheet states that

18 [N]utrients, particularly inorganic nitrogen, discharged from
19 domestic wastewater treatment plants contribute to low dissolved
20 oxygen concentrations in Puget Sound that do not meet state water
21 quality criteria. . . .The [modeled] circulation patterns showed how
22 discharges in one basin can affect the water quality in other basins.
23 Thus, all wastewater discharges to the greater Puget Sound area
24 containing nitrogen currently contribute to existing DO
25 impairments meeting the threshold for reasonable potential under
26 40 C.F.R. 122.44(d)(1)(iii).

27 Fact Sheet at 32-33.

28 Notwithstanding this assertion, the PSNGP authorizes each discharger subject to the
29 PSNGP to continue discharging at what the PSNGP purports to be its current levels of TIN,
30 subject to future evaluations that may result in unspecified reductions in TIN discharges. For

31 NOTICE OF APPEAL - 6

1 example, Condition S4.B sets forth TIN action levels for each of the WWTPs classified by
2 Ecology as “dominant dischargers” based on Ecology’s calculation of the WWTP’s *current* TIN
3 discharges.²

4 Furthermore, Condition S3.B states that:

5 Ecology presumes that a Permittee complies with water quality
6 standards unless discharge monitoring data or other site-specific
7 information demonstrates that a discharge causes or contributes to
8 a violation of water quality standards, when the Permittee complies
9 with the following conditions. The Permittee must fully comply
with all permit conditions, including planning, optimization,
corrective actions (as necessary), sampling, monitoring, reporting,
waste management, and recordkeeping conditions.

10 *Id.* This means that, so long as an individual WWTP does not exceed its TIN action level (or if it
11 does exceed that level, it undertakes the measures required in Condition S4.D), that individual
12 WWTP is presumed by Ecology to be in compliance with the PSNGP. This is so even though
13 Ecology has determined that each facility’s current discharge is causing or contributing to a
14 water quality standards violation, and even though Condition S3.A explicitly prohibits
15 discharges that cause WQS violations.

16 Thus, the PSNGP is unreasonable and internally inconsistent. It purports to expressly
17 allow discharges in Conditions S4.B, S5.B, and S6 that it disallows in Condition S3.A. Although
18 Condition S3.B presumes Permit compliance if a permittee adheres to all the requirements in the
19 Permit, those requirements include Condition S3.A—in other words, the PSNGP presumes
20 compliance with water quality standards only if the Permittee complies with water quality
21 standards. In addition to being arbitrary and internally inconsistent, Condition S3 is unlawful
22 because it has no legal basis. Having determined that discharges of nutrients from the WWTPs
23 have a reasonable potential to cause or contribute to a water quality standards violation, Ecology

24
25 ² Ecology has concluded that a facility subject to these action levels has a 1% chance of
26 exceeding the action level, based on its current operations, in a given year.

1 is required to establish permit effluent limits for nutrients. 40 C.F.R. § 122.44(d)(1)(iii). When
2 numeric effluent limits are infeasible, “best management practices” may be used instead. *See*
3 40 C.F.R. § 122.44(k)(3). But Condition S3 is neither a numeric effluent limit nor a best
4 management practice of any kind.³ It does not tell the permittee or the public what discharge
5 quality the WWTP must achieve or what treatment measures or other practices the WWTP must
6 undertake. Rather, the condition simply exposes each of the permittees to liability, including
7 penalties of up to \$56,460 per day per violation, *see* 33 U.S.C. § 1319(d); 40 C.F.R. § 19.4, if an
8 after-the-fact determination is made that the permittee’s discharges caused or contributed to a
9 violation of water quality standards.

10 For all these reasons, Condition S3, and the Permit as a whole, is unlawful and should be
11 invalidated.

12 **E. The Action Levels Established by Condition S4.B Do Not Represent the**
13 **County’s Current Discharge Levels**

14 The Fact Sheet states that Ecology used a statistical analysis of existing TIN discharge
15 data to set the action levels for each of the dominant WWTPs at “the 99% upper confidence
16 level,” so that each WWTP “would have a 1% chance of exceeding if the [discharge] loads are
17 consistent with existing loading.” Fact Sheet at 41. The County, however, calculates that,
18 without any increase in its TIN discharges, it has a 40% chance of exceeding the assigned action
19 levels, and therefore the action levels are *not* set at the 99 % upper confidence level. In addition
20 to improperly calculating the action levels, Ecology used limited data collected during the
21 pandemic to establish the action levels. Those data are inherently skewed and are not indicative
22 of actual current discharge levels. Accordingly, the action levels for the County’s South Plant,
23

24
25 ³ “Best management practices” are “schedules of *activities*, prohibitions of *practices*,
26 maintenance *procedures*, and other *management practices* to prevent or reduce the pollution of
‘waters of the United States.’” 40 C.F.R. § 122.2 (emphasis added).

1 West Point Plant and Brightwater Plants do not accurately reflect their current discharges and
2 should be revised.

3 Should the County trigger two consecutive exceedances of its assigned TIN action levels,
4 or three exceedances in the next five years, PSNGP Condition S4.D will require the County to
5 design and implement control measures to reduce its annual TIN load to 10% below the assigned
6 action level for that Plant, or 10% below the combined “bubbled” load assigned to all three of the
7 County’s dominant discharging WWTPs. To reduce its current TIN discharge by 10% will
8 require the County to allocate tens if not hundreds of millions of dollars to acquire new
9 technology, and perhaps new treatment facilities altogether.

10 Given all that is at stake, Ecology should be required to re-set the County’s action levels
11 to levels that accurately reflect the current TIN discharges loads from its WWTPs. Although
12 PSNGP Condition S2.D allows Ecology to approve a change in action levels, and Ecology’s Fact
13 Sheet states that Ecology is open to re-evaluating the action levels in year 2 of the Permit so long
14 as the individual Plant demonstrates that its influent levels of TIN have not increased, the current
15 action levels cannot be justified by a potential for future revision.

16 The corrective actions required under Condition S4.D.2 would require expenditures of
17 vast amounts of County staff time and resources to prepare and submit the required engineering
18 report and design information, and should not be required on the basis of action levels that do not
19 accurately represent the County’s current discharges. For these reasons, the action levels
20 established in Condition S4.B. should be invalidated.

21 **F. The Requirement to Reduce Current TIN Discharges by Ten Percent Is**
22 **Unreasonable and Has No Legal or Factual Basis**

23 If a dominant WWTP exceeds its action level for two consecutive years, or three times
24 during the Permit term, PSNGP Condition S4.D.2 requires the WWTP to reduce its TIN
25 discharges “by at least 10% below the action level.” This required reduction is unreasonable and
26 not based on any evidence. Nor is there any legal basis for the required reduction. It is not based

1 on an AKART determination, because Ecology concedes that it has not yet completed an
2 AKART evaluation for the PSNGP. *See* Condition S4.E (requiring dominant dischargers to
3 prepare a Nutrient Reduction Evaluation that includes an AKART analysis for purposes of
4 evaluating reasonable treatment alternatives capable of reducing TIN). Similarly, it is not based
5 on a water quality evaluation because Ecology acknowledges that it does not have data sufficient
6 to establish a water quality-based numeric discharge limit. Fact Sheet at 33. In fact, Ecology
7 concedes that, although its Salish Sea Modeling effort demonstrates the need to reduce current
8 TIN discharges, the model is incapable of showing Ecology by “how much.” Fact Sheet at 30
9 (explaining that modeling work is continuing to determine the “scale of reductions necessary to
10 meet numeric water quality standards”). Moreover, the failure to achieve an assigned action
11 level cannot under any circumstances justify an arbitrary ten percent reduction on either AKART
12 or water quality grounds. A failure to achieve the action level would suggest, if anything, that
13 AKART is *higher* than the action level. And the discharge level needed to achieve water quality
14 standards will not change based on whether the action level is met.

15 Because the required ten percent reduction is not supported by any legal requirement or
16 any factual basis and is not tethered to water quality, it should be invalidated.

17 **G. The County’s WWTPs Are Not Causing or Contributing to WQS**
18 **Violations**

19 Ecology has concluded that each of the 58 WWTPs subject to the PSNGP causes or
20 contributes to an exceedance of the DO WQS, including King County’s four Plants. The Fact
21 Sheet states:

22 Ecology’s application of the Salish Sea Model (SSM) has shown
23 that nutrients, particularly inorganic nitrogen, discharged from
24 domestic wastewater treatment plants contribute to low dissolved
25 oxygen concentrations in Puget Sound that do not meet state water
26 quality criteria. . . . [T]he “Bounding Scenarios” report confirmed
that circulation within the inner basins of Puget Sound distributes
pollutants throughout the waters in the Puget Sound region. The

1 circulation patterns showed how discharges in one basin can affect
2 the water quality in other basins. Thus, all wastewater discharges
3 to the greater Puget Sound area containing nitrogen cumulatively
4 contribute to existing DO impairments meeting the threshold for
5 reasonable potential under 40 C.F.R. 122.44(d)(1)(iii).

6 Id. at 32.

7 The County appeals this determination that discharges from its four Plants have a
8 “reasonable potential” to cause or contribute to violations of the DO WQS. The SSM is not
9 capable of generating, and does not have the technical precision to generate, data or information
10 to show that the County’s four Plants are causing or contributing to violations of the DO standard
11 in Puget Sound. More specifically, the SSM does not have the precision to estimate that the
12 County’s discharges are contributing to a human-caused 0.2 mg/L depletion of DO at the discrete
13 locations in Puget Sound where Ecology has found a DO impairment, which are many miles
14 away from the County’s outfalls. The 2019 bounding scenarios report referenced in the Fact
15 Sheet includes an assessment of the Mean Square Error (“MSE”) of the SSM. The MSE
16 indicates that DO levels can be predicted within an error of 0.8 mg/L, an error rate that is four
17 times greater than the 0.2 mg/L reduction allowed from human activities (including King
18 County’s individual plant discharges) when DO levels do not meet the applicable DO criterion.
19 *See* WAC 173-201A-210(1)(d)(i). For this and other reasons, the SSM cannot determine if the
20 County’s discharges are causing or contributing to DO exceedances in Puget Sound, and there is
21 no reasonable potential for the County’s discharges to cause or contribute to excursions from the
22 DO criteria. Ecology’s reliance on the SSM for its reasonable potential analysis and
23 corresponding findings is therefore unreasonable and not supported by a preponderance of the
24 evidence, and, accordingly, there is no basis for applying the PSNGP to the County’s four
25 WWTPs.
26

1 **5. RELIEF REQUESTED**

2 The County requests the Board to invalidate the PSNGP as it applies to King County's
3 four WWTPs, to invalidate specific provisions of the PSNGP, and to invalidate the PSNGP as a
4 whole.

5 The County requests that the Board invalidate the PSNGP because it unlawfully requires
6 the 58 WWTPs subject to it to obtain coverage under it, and to invalidate the PSNGP as it
7 applies to King County's four WWTPs because each is already covered by individual NPDES
8 permits for the same discharges covered under the PSNGP.

9 The County requests that the Board invalidate the PSNGP as a whole and as it applies to
10 the County's four WWTPs because the PSNGP unlawfully authorizes and regulates the same
11 discharges that are also authorized and regulated by the 58 individual NPDES permits for the
12 WWTPs subject to the PSNGP, including the County's four WWTPs.

13 The County requests that the Board invalidate the PSNGP as a whole and as it applies to
14 the County because it unlawfully modifies the individual NPDES permits for the 58 WWTPs
15 subject to the PSNGP, including the County's four WWTPs, without complying with the
16 procedures required for such modifications.

17 The County requests that the Board invalidate PSNGP Condition S3 and the PSNGP as a
18 whole because there is no legal basis for Condition S3 and because the condition and the PSNGP
19 as a whole are internally inconsistent, unreasonable, and unlawful in that they simultaneously
20 authorize and prohibit discharges that Ecology has determined contribute to excursions from
21 WQS.

22 The County requests that the Board invalidate the specific action levels assigned by
23 Condition S4.B to the County's South Plant, Brightwater Plant, and West Point Plant because
24 they are not representative of the current discharge levels from those Plants.

1 The County requests that the Board invalidate the ten percent TIN discharge reduction
2 requirement set forth in Condition S4.D because it is unreasonable, has no legal basis, and is not
3 factual evidence tied to water quality.

4 The County requests that the Board invalidate the PSNGP as it applies to the County's
5 four WWTPs because the SSM is not capable of demonstrating that the County's four WWTPs
6 have a reasonable potential to cause or contribute to a violation of the dissolved oxygen
7 standards in Puget Sound.


8 Because the Permit requires King County to seek coverage for its four individual
9 WWTPs by March 1, 2022, or risk being in violation of the Permit, King County respectfully
10 requests the Board to immediately stay the Permit. For the reasons described above and in the
11 accompanying motion to stay, the County is likely to succeed on the merits of the appeal, and
12 compliance with the Permit will immediately cause irreparable and increasing harm to the
13 County, including potential liability for violating those terms of the Permit with which the
14 County cannot reasonably comply. King County is contemporaneously filing a stay motion with
15 this Notice of Appeal.

16 **6. RESERVATION OF RIGHTS**

17
18 The County reserves the right to incorporate any grounds for appeal asserted by another
19 party in this appeal or consolidated appeals of the PSNGP. The County also reserves the right to
20 add or clarify the grounds for appeal in any proposed issues for a prehearing order or amendment
21 of the prehearing order as allowed by rules of practice before the Board, found at WAC 371-08.
22
23
24
25
26

1 DATED: December 28, 2021

STOEL RIVES LLP

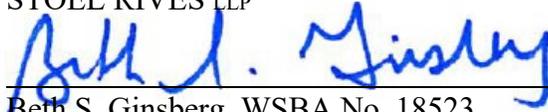

Beth S. Ginsberg, WSBA No. 18523

beth.ginsberg@stoel.com

600 University Street, Suite 3600

Seattle, WA 98101

(206) 386-7581

Michael R. Campbell, WSBA No. 55300

michael.campbell@stoel.com

760 SW Ninth Avenue, Suite 3000

Portland, OR 97205

(503) 224-3380

Verna P. Bromley, WSBA No. 24703

verna.bromley@kingcounty.gov

Michael Graves, WSBA No. 52632

mgraves@kingcounty.gov

King County Prosecuting Attorney's Office

1191 2nd Avenue, Suite 1700

Seattle, WA 98101

(503) 294-9676

*Attorneys for Appellant
King County*

CERTIFICATE OF SERVICE

I, Lynn A. Stevens, certify and declare:

I am over the age of 18 years, make this Declaration based upon personal knowledge, and am competent to testify regarding the facts contained herein.

On December 28, 2021, I served true and correct copies of the document to which this certificate is attached on the following persons in the manner listed below:

The Department of Ecology
Appeals Coordinator/Processing Desk
300 Desmond Drive SE
Lacey, WA 98503
 Via Facsimile
 Via U.S. Mail
 Via Legal Messenger
 Via Federal Express

Bob Ferguson
Washington State Attorney General
Office of the Attorney General
Ecology Division
1125 Washington Street, SE
Olympia, WA 98501
 Via Facsimile
 Via U.S. Mail
 Via Legal Messenger
 Via Federal Express

The Pollution Control Hearings Board
1111 Israel Rd. SW, Ste 301
Tumwater, WA 98501
pchb-shbappeals@elaho.wa.gov.
 Via Facsimile
 Via U.S. Mail
 Via Email
 Via Federal Express

I certify under penalty of perjury pursuant to the laws of the State of Washington that the foregoing is true and correct.

SIGNED on December 28, 2021, at Seattle, Washington.



Lynn A. Stevens

FACT SHEET FOR
THE
PUGET SOUND
NUTRIENT
DRAFT GENERAL
PERMIT

FACT SHEET FOR THE PUGET SOUND NUTRIENT DRAFT GENERAL PERMIT

A NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM AND
STATE WASTE DISCHARGE GENERAL PERMIT

ISSUANCE DATE: DECEMBER 1, 2021

EFFECTIVE DATE: JANUARY 1, 2022



SUMMARY

This fact sheet is a companion document to the draft National **Pollutant Discharge Elimination System** (NPDES) Permit for Discharges from municipal wastewater treatment plants in the **Washington waters of the Salish Sea** contributing to **impairments** within the **greater Puget Sound region** (Puget Sound Nutrient General Permit, or PSNGP). The **permit** authorizes the discharge of municipal wastewater containing **total inorganic nitrogen**. Municipal wastewater refers to wastewater primarily from domestic (household) sources as well as commercial, industrial, and institutional sources that are treated at a **publicly owned treatment works (POTW)**. The PSNGP limits the **discharge** of pollutants to **surface waters** under the authority of the Federal Water Pollution Control Act (U.S.C.S. 1251) and limits the discharge of **pollutants** to surface water under the authority of Chapter 90.48 RCW.

Washington State Department of Ecology (**Ecology**) announced a preliminary determination to develop a **general permit** for municipal wastewater containing total inorganic nitrogen on January 30, 2020. The United States Environmental Protection Agency (**EPA**) treats municipal wastewater discharged directly into the greater Puget Sound as a **point source** in **40 Code of Federal Register (CFR) 122.2**. Discharges from point sources require an NPDES permit. Ecology currently issues individual NPDES permits to municipal wastewater treatment plants. The PSNGP addresses the discharge of nutrient **pollution** from POTWs that hold an existing, individual NPDES permit.

The Washington State Department of Ecology is proposing to issue the PSNGP. This would be the first issuance of the PSNGP. This Fact Sheet explains the presence of nutrients in domestic sewage, Ecology's decisions on limiting total inorganic nitrogen in municipal wastewater, and the regulatory and technical basis for those decisions.

This Fact Sheet is a companion document to the draft permit that provides information to help interested parties better understand the technical issues associated with the permit. Ecology generally will not revise a fact sheet following public comment but will prepare a response to comments. This fact sheet does not contain any independently enforceable requirements. The PSNGP contains all of the requirements applicable to **dischargers**. In case of any conflict between the fact sheet and the PSNGP, the terms of the PSNGP govern.

TABLE OF CONTENTS

DRAFT FACT SHEET FOR THE STATE OF WASHINGTON 1

PUGET SOUND NUTRIENT GENERAL PERMIT**Error! Bookmark not defined.**

INTRODUCTION 8

BACKGROUND INFORMATION 9

 HISTORY 9

 General Permit Approach 11

 Wastewater Characterization and Subject dischargers..... 12

 SEPA COMPLIANCE..... 16

 additional SEPA review for permittees 16

PERMIT LIMITS 17

 TECHNOLOGY-BASED LIMITATIONS..... 18

 TECHNOLOGY-BASED EFFLUENT LIMITATIONS FOR DOMESTIC
 WASTEWATER FACILITIES 18

 SURFACE WATER QUALITY LIMITS 19

 NUMERIC CRITERIA FOR THE PROTECTION OF AQUATIC LIFE..... 19

 NUMERIC CRITERIA FOR THE PROTECTION OF HUMAN HEALTH..... 19

 NARRATIVE CRITERIA 20

 ANTIDegradation 20

 CRITICAL CONDITIONS 21

 MIXING ZONES 22

 DESCRIPTION OF THE RECEIVING WATER..... 22

 DESIGNATED USES AND SURFACE WATER QUALITY CRITERIA..... 23

 History of Dissolved Oxygen Impairments and Investigations 25

 Authority to Include Non-Numeric Water Quality-Based Limits 32

Rationale for Non-Numeric Water quality-Based Effluent Limits	32
Consideration of Narrative Surface Water Quality-Based Limits for Numeric Criteria.....	33
Sediment Quality	37
GROUND WATER QUALITY LIMITATIONS	37
ANTI-BACKSLIDING.....	37
DESCRIPTION OF SPECIAL CONDITIONS.....	37
S1. Permit Coverage	38
S2. Application for coverage.....	39
S3. COMPLIANCE WITH STANDARDS.....	40
S4. REQUIREMENTS FOR WWTPS WITH DOMINANT TIN LOADS.....	40
Action Level Calculation.....	40
Draft Condition S4.C Nitrogen Optimization Plan	42
S5. Requirements for WWTPs with Small TIN Loads.....	51
Monitoring	52
Nutrient Optimization Plan.....	52
AKART Analysis.....	52
S6. Monitoring Requirements	53
Wastewater Sampling Requirements	54
Analytical Methods and Quantitation Levels.....	55
S7. Discharges to 303(d) or TMDL waterbodies	57
S8. Solid and Liquid Waste Disposal	57
S9. Reporting and Recordkeeping Requirements.....	57
<i>Draft Condition S9.C Annual Report for Dominant Loaders</i>	57
<i>Draft Condition S9.D Single Report for Small Loaders</i>	58

S10. Permit Fees	58
GENERAL CONDITIONS.....	58
Condition G1	58
Condition G2	58
Condition G3	58
Condition G4	59
Condition G5	59
Condition G6	59
Condition G7	59
Condition G8	59
Condition G9	59
Condition G10	59
Condition G11	59
Condition G12	59
Condition G13	59
Condition G14	59
Condition G15	59
Condition G16	60
Condition G17	60
Condition G18	60
Condition G19	60
Condition G20	60
Condition G21	60
Condition G22	60

Condition G23	60
Condition G24	60
Condition G25	60
PERMIT ISSUANCE PROCEDURES	61
PERMIT MODIFICATIONS	61
RECOMMENDATION FOR PERMIT ISSUANCE	61
ECONOMIC IMPACT ANALYSIS.....	61
BIBLIOGRAPHY	62
REFERENCES FOR TEXT AND APPENDICES	62
Court Cases	65
Federal Publications.....	65
Revised Code Washington (RCW)	66
Washington Administrative Code (WAC).....	66
APPENDIX A - PUBLIC INVOLVEMENT INFORMATION	68
APPENDIX B - GLOSSARY.....	71
APPENDIX C – RESPONSE TO COMMENTS.....	77
APPENDIX D – PERMITTEE CATEGORY DETERMINATION	78
APPENDIX E – DATA USED IN ACTION LEVEL CALCULATIONS	83

To request ADA Accommodation, contact Water Quality Reception at 360-407-6600 or visit <https://ecology.wa.gov/accessibility>. For Relay Services or TTY call 711 or 877-833-6341.

For document translation services, call Water Quality Reception at 360-407-6600. Por publicaciones en español, por favor llame Water Quality Reception al 360-407-6600.

THIS PAGE INTENTIONALLY LEFT BLANK

INTRODUCTION

The Federal ***Clean Water Act*** (FCWA, 1972, and later modifications, 1977, 1981, and 1987) established ***water quality*** goals for the navigable (surface) waters of the United States. One of the mechanisms for achieving the goals of the Clean Water Act is the National Pollutant Discharge Elimination System permit program (NPDES permits), which is administered by the U.S. Environmental Protection Agency (EPA). The EPA has delegated responsibility to administer the NPDES permit program to the State of Washington on the basis of Chapter 90.48 of the Revised Code of Washington (RCW), which defines the Department of Ecology's authority and obligations in administering the wastewater discharge permit program.

The regulations adopted by the state include procedures for issuing general permits (Chapter 173-226 of the Washington Administrative Code [WAC]), water quality criteria for surface waters (Chapters 173-201A WAC), and sediment management standards (Chapter 173-204 WAC). These regulations require a permit to be issued before discharge of wastewater to ***waters of the state*** is allowed. The regulations also establish the basis for effluent limitations and other requirements, which are to be included in the permit. One of the requirements (WAC 173-226-110) for issuing a general permit under the NPDES permit program is the preparation of a draft permit and an accompanying fact sheet. The regulations also require public notice of the draft permit for at least 30 days before the permit is issued (WAC 173-226-130). The fact sheet and draft permit are available for review (see *Appendix A – Public Involvement* of the fact sheet for more detail on the Public Notice procedures).

After the public comment period has closed, Ecology will summarize the substantive comments and prepare a response to each comment. The summary and response to comments will become part of the file on the permit. Parties submitting comments will receive a copy of Ecology's response. Comments and the resulting changes to the permit will be summarized in an appendix to this fact sheet, *Appendix C – Response to Comments*.

BACKGROUND INFORMATION

HISTORY

Following extensive, scientific investigations regarding existing dissolved oxygen (DO) impairments from excess nutrient loading to Puget Sound, Ecology issued a public notice of a Preliminary Determination to develop a Puget Sound Nutrient General Permit (PSNGP) on August 21, 2019. During the 60 day period which closed October 21, 2019, Ecology received public comments on whether the Agency should move forward with the development of a general permit to control nutrient discharges from existing municipal wastewater treatment plants (WWTPs or POTWs) in *Washington Waters of the Salish Sea* that contribute to impairments within the greater Puget Sound region.

Ecology received 49 comment letters during the Preliminary Determination period. Overall, comments received in support of the PSNGP carried a message that WWTPs should implement nutrient controls in a timely fashion, regardless of permitting approach. While not all comments were favorable to the GP approach, a theme of conditional support of a collaborative effort to reduce nutrients emerged.

After carefully considering comments received, Ecology announced a preliminary determination to develop a general permit for municipal treatment plants discharging to Puget Sound at the *Puget Sound Nutrient Forum (PSNF)* on January 30, 2020. As part of that announcement, Ecology also led a stakeholder engagement exercise to receive input on the type of collaborative approach the agency should use to develop the permit. Ecology proposed using an Advisory Committee and solicited feedback on the composition and roles of that committee during the January 2020 PSNF. After receiving that feedback, Ecology released a follow up online nomination survey for volunteers willing to represent the different regional interests on the PSNGP's Advisory Committee (AC).

In March 2020, Ecology convened a 14 person permit Advisory Committee representing regional treatment plants, state agencies (including Ecology), the EPA and the environmental community. Ecology invited Tribal involvement in the advisory committee and left a seat at the table for a representative. However, the Tribes preferred to engage directly with the Governor's office and through staff level meetings held by the Northwest Indian Fisheries Commission's Coordinated Tribal Water Quality Program. Table 1, below, shows the original AC members selected to help advise Ecology on conceptual permitting concepts and conditions.

Table 1. Original PSNGP Advisory Committee Members

Name	Affiliation	Role	Geography
Mark Sadler	City of Everett, Public Works	Operations Superintendent	North Central

Name	Affiliation	Role	Geography
Joe Grogan	Town of Coupeville	Utility Superintendent	North Central
Dan Thompson	City of Tacoma	Division Manager	South Central
Rebecca Singer	King County DNRP, Wastewater Treatment Division	Resource Recovery Manager	South Central
Patrick Kongslie	Pierce County Planning and Public Works –Sewer Division/PNCWA Olympia Section	Sewer Division Maintenance and Operations Manager	South Central
Wendy Steffensen	LOTT Clean Water Alliance	Environmental Project Manager	South Sound
Pete Tjemsland	City of Sequim	Utilities Manager and Operator	Strait of Juan de Fuca
Jeff Clarke	Washington Association of Sewer and Water Districts	Past President	Puget Sound Wide
Bruce Wishart	Puget Soundkeeper	Policy Lead	Puget Sound Wide
Mindy Roberts	Washington Environmental Council	Puget Sound Program Director	Puget Sound Wide
Jenny Wu	EPA	Engineer, Permit Writer	Puget Sound Wide
Valerie Smith	Department of Commerce	Senior Planner	Puget Sound Wide
Chip Anderson	Lummi Tribal Water and Sewer District	District Manager	North Sound

Name	Affiliation	Role	Geography
Tribe - Unfilled			

Ecology hosted virtual AC meetings monthly from March 2020 through October 2020. Each meeting worked towards producing a [Final Recommendations document](#) that captured agreements and dissenting opinions on each of the conceptual approaches discussed. In addition to AC meetings, different caucuses formed to discuss the permit concepts during separate meetings. The four separate caucus groups included: one for environmental groups, state agencies, federal agencies and utilities. The utility caucus provided Ecology with an alternative permitting proposal that spanned several permit cycles. Ecology did not use this proposal in developing the draft permit but appreciates the effort utilities participating in that caucus made to get their opinions to the agency. The primary reason Ecology did not use this proposal stems from the Agency’s immediate need to address nutrients in **domestic wastewater** discharges, starting with the first permit cycle.

On January 27, 2021, Ecology released the preliminary draft of the PSNGP to the public and started a 47-day informal comment period that ended on March 15, 2021. Ecology received sixty-seven individual comment letters on the preliminary draft in addition to multiple copies of identical form letters from various action networks. The comments illustrated the different perspectives of the commenters, which included individuals, organizations, Tribes, municipalities and other interested parties. Ecology carefully reviewed the comments and feedback from the public and made revisions to the permitting concepts released in the preliminary draft. The revisions constitute the formal draft of the PSNGP.

Ecology released the formal draft of the Puget Sound Nutrient General Permit, the accompanying fact sheet providing the statement of basis, and the **Notice of Intent** (application) on June 16, 2021. This release starts the formal comment period that ends on August 2, 2021. The comment period includes two virtual public hearings. Please see Appendix A – Public Involvement Information for more information about the public hearings. Ecology will consider the comments made on the formal draft before making a permit issuance decision on the first general permit in late summer or fall 2021. A formal response to comments will accompany the final permit.

GENERAL PERMIT APPROACH

A general permit to address multiple point source discharges from municipal wastewater treatment plants in a specific geographic area is an appropriate permitting approach for the following reasons:

- A general permit is an efficient method to establish the essential regulatory requirements appropriate for controlling total inorganic nitrogen in municipal wastewater.

- A general permit allows Ecology to handle permit applications within the state of Washington more efficiently.
- A general permit is consistent with EPA's four-tier permitting strategy, the purpose of which is to use the flexibility provided by the Clean Water Act in designing a workable and reasonable permitting system.

In addition, critical benefits to a general permit for municipal dischargers include an equitable roll out of nutrient controls in the region and a shared basis for working together to develop treatment solutions that may ultimately include a water quality trading framework. Implementing nutrient controls through existing, individual NPDES permits would stagger the rollout across the region placing dischargers on different timelines and delaying improvements in water quality.

A general permit is designed to provide coverage for a group of related facilities or operations of a specific industry type or group of industries. It is appropriate when the discharge characteristics are sufficiently similar, and a standard set of permit requirements can effectively provide environmental protection and comply with **water quality standards** for discharges. Ecology determined that discharge of total inorganic nitrogen from municipal WWTPs is best controlled by coverage under a General Permit with the Preliminary Determination. All **marine point sources** proposed for coverage under this General Permit are located in the same geographic region (i.e., Washington waters of the Salish Sea). Discharges from these plants are similar in nature as they are all generated by the treatment of municipal wastewater. Therefore, this general permit will appropriately implement a similar application of narrative effluent limits and monitoring requirements for this class of point sources. If Ecology determines that pollutants from a specific **facility** are not managed or controlled by the general permit to protect state water quality standards, then Ecology may elect to use the individual permit as the preferred regulatory mechanism.

WASTEWATER CHARACTERIZATION AND SUBJECT DISCHARGERS

This draft general permit proposes to cover municipal WWTPs that own and operate secondary and advanced secondary wastewater treatment facilities as described in their individual NPDES permits. Municipal sewage includes wastes generated by residential and commercial buildings, institutions and some industries within a municipality's sewer shed. It contains nutrients (nitrogen and phosphorus), suspended solids, and bacteria in addition to having an oxygen demand that varies depending on the strength of the wastewater. Domestic wastewater may also contain toxic pollutants due to pass through from household chemicals, industrial sources or individual use of pharmaceuticals and personal care products. If not properly treated, these pollutants can enter the **receiving water** causing impacts to water quality. This permit authorizes the discharge of treated municipal effluent containing total inorganic nitrogen. Existing individual NPDES permits held by all **Permittees** contain requirements to restrict other pollutants found in the wastewater effluent.

The draft general permit supersedes effluent requirements related to total inorganic nitrogen in the individual NPDES permits with the exception of ammonia effluent limitations developed for control of ammonia toxicity.

Dischargers that must apply for coverage under this draft general permit are listed in Table 2, below. Ecology has prioritized permit reissuance schedules in the Northwest and Southwest Regions working towards minimizing the current permit backlog. Updating individual NPDES permits for Permittees proposed for coverage under the PSNGP is a priority for the agency.

Table 2. Proposed PSNGP Permittees

Wastewater Treatment Plant	Individual NPDES Permit Number	Individual Permit Issuance Date
Alderwood STP	WA0020826	11/27/2018
Anacortes WWTP	WA0020257	11/9/2017
Bainbridge Island WWTP	WA0020907	6/29/2017
Birch Bay Sewage Treatment Plant (STP)	WA0029556	1/29/2021
Boston Harbor STP	WA0040291	12/15/2011
Bremerton WWTP	WA0029289	10/30/2018
Chambers Creek WWTP	WA0039624	5/1/2008
Clallam Bay WWTP	WA0024431	11/19/2018
Clallam Bay Corrections Center WWTP	WA0039845	1/25/2017
Coupeville STP	WA0029378	6/19/2019
Eastsound Orcas Village WWTP	WA0030911	12/11/2015
Eastsound Sewer and Water District WWTP	WA0030571	6/29/2016
Edmonds STP	WA0024058	10/24/2014

Wastewater Treatment Plant	Individual NPDES Permit Number	Individual Permit Issuance Date
Everett STP	WA0024490	9/30/2015
Fisherman Bay STP	WA0030589	2/1/2017
Friday Harbor STP	WA0023582	8/21/2017
Gig Harbor WWTP	WA0023957	3/13/2015
Hartstene Pointe STP	WA0038377	12/31/2017
King County Brightwater WWTP	WA0032247	2/26/2018
King County South WWTP	WA0029581	7/1/2015
King County Vashon WWTP	WA0022527	1/16/2017
King County West Point WWTP	WA0029181	12/19/2014
Kitsap County Central Kitsap WWTP	WA0030520	6/29/2017
Kitsap County Kingston WWTP	WA0032077	9/30/2015
Kitsap County Manchester WWTP	WA0023701	1/19/2018
Kitsap County Sewer District #7 Water Reclamation Facility (WRF)	WA0030317	6/24/2016
La Conner STP	WA0022446	2/19/2019
Lake Stevens Sewer District WWTP	WA0020893	10/6/2017
Lakota WWTP	WA0022624	9/17/2018
Langley STP	WA0020702	7/30/2014
Lighthouse Point WRF/Blaine STP	WA0022641	6/25/2019

Wastewater Treatment Plant	Individual NPDES Permit Number	Individual Permit Issuance Date
LOTT Budd Inlet WRF	WA0037061	2/16/2018
Lynnwood STP	WA0024031	2/8/2019
Marysville STP	WA0022497	11/1/2017
McNeil Island Special Commitment Center WWTP	WA0040002	7/1/2016
Midway Sewer District WWTP	WA0020958	11/4/2015
Miller Creek WWTP	WA0022764	10/1/2018
Mt Vernon WWTP	WA0024074	1/31/2017
Mukilteo Water and Wastewater District WWTP	WA0023396	10/31/2018
Oak Harbor STP	WA0020567	4/27/2018
Penn Cove WWTP	WA0029386	12/5/2014
Port Angeles WWTP	WA0023973	1/7/2016
Port Orchard WWTP (South Kitsap WRF)	WA0020346	11/11/2018
Port Townsend STP	WA0037052	11/13/2015
Post Point WWTP (Bellingham STP)	WA0023744	6/19/2014
Redondo WWTP	WA0023451	9/26/2018
Rustlewood WWTP	WA0038075	10/8/2014
Salmon Creek WWTP	WA0022772	6/1/2018
Sekiu WWTP	WA0024449	9/4/2014

Wastewater Treatment Plant	Individual NPDES Permit Number	Individual Permit Issuance Date
Sequim WRF	WA0022349	3/18/2014
Shelton WWTP	WA0023345	3/14/2008
Skagit County Sewer District 2 Big Lake WWTP	WA0030597	1/29/2021
Snohomish WWTP	WA0029548	5/21/2018
Stanwood STP	WA0020290	9/23/2016
Tacoma Central No. 1 WWTP	WA0037087	10/6/2010
Tacoma North No. 3 WWTP	WA0037214	6/4/2009
Tamoshan STP	WA0037290	10/26/2017
WA Parks Larrabee WWTP	WA0023787	10/13/2016

SEPA COMPLIANCE

State law exempts the issuance, reissuance, or modification of a wastewater discharge permit for an existing discharge from the **State Environmental Policy Act** (SEPA) process as long as the permit contains conditions that are no less stringent than Federal and State rules and regulations (RCW 43.21C.0383). This exemption applies to the issuance of this general permit and to existing discharges, not to new discharges.

ADDITIONAL SEPA REVIEW FOR PERMITTEES

A modification of permit coverage for physical alterations, modifications, or additions to the wastewater treatment process that are substantially different from the original design and/or expands the existing treatment footprint requires SEPA compliance. Optimization does not require additional SEPA review. Additional SEPA review may be necessary if Ecology determines that the modification is outside of the scope of the initial SEPA evaluation conducted. WAC 197-11-880 allows for exemption from SEPA review for actions that must be undertaken to avoid an imminent threat to public health or safety, to prevent an imminent danger to public or private property, or to prevent an imminent threat of serious environmental degradation.

PERMIT LIMITS

Section 502(11) of the CWA defines “effluent limitation” as *any restriction on the quantity, rate, and concentration of chemical, physical, biological, and other constituents which are discharged from point sources into navigable waters, the waters of the contiguous zone, or the ocean, including schedules of compliance*. Effluent limitations are among the permit conditions and limitations prescribed in NPDES permits issued under Section 402(a) of the Act, 33 U.S.C. §1342(a).

Federal and state regulations require that discharges from existing facilities must, at a minimum, meet technology-based effluent limitations reflecting, among other things, the technological capability of Permittees to control pollutants in their discharges that are economically achievable. Specifically, state laws (RCW 90.48.010, 90.52.040 and 90.54.020) require the use of “all known, available and reasonable methods of prevention, control and treatment” (**AKART**).

Water quality-based effluent limits (WQBELs) are required by CWA Section 301(b)(1)(C) and, in Washington State, are based on compliance with the Surface Water Quality Standards (Chapter 173-201A WAC), Ground Water Standards (Chapter 173-200 WAC), Sediment Quality Standards (Chapter 173-204 WAC) or the Federal water quality criteria applicable to Washington (40 CFR Part 135.45). Ecology chooses the more stringent of these two limits (technology or water quality-based) for each of the parameters of concern when drafting NPDES permits. [CWA sections 301(a) and (b)].

Effluent limits in NPDES permits may be expressed as numeric or non-numeric discharge requirements. Under EPA’s regulations, non-numeric effluent limits are authorized in lieu of numeric limits, where “[n]umeric effluent limitations are infeasible.” [40 CFR 122.44(k)(3).] Courts have recognized that there are circumstances when numeric effluent limits are infeasible and have held that EPA may issue permits with conditions (for example, BMPs) designed to reduce the level of effluent discharges to acceptable levels:

Natural Res. Def. Council, Inc. v. EPA, 673 F.2d 400, 403 (D.C. Cir. 1982) (noting that “section 502(11) defines ‘effluent limitation’ as ‘any restriction’ on the amounts of pollutants discharged, not just a numerical restriction”; holding that section of CWA authorizing courts of appeals to review promulgation of “any effluent limitation or other limitation” did not confine the court’s review to the EPA’s establishment of numerical limitations on pollutant discharges, but instead authorized review of other limitations under the definition) (emphasis added).

In *Natural Res. Def. Council, Inc. v. Costle, 568 F.2d 1369 (D.C. Cir. 1977)*, the D.C. Circuit stressed that when numerical effluent limitations are infeasible, EPA may issue permits with conditions designed to reduce the level of effluent discharges to acceptable levels.

TECHNOLOGY-BASED LIMITATIONS

TECHNOLOGY-BASED EFFLUENT LIMITATIONS FOR DOMESTIC WASTEWATER FACILITIES

Federal and state regulations define secondary treatment requirements for domestic wastewater treatment plants. These effluent limits are provided in 40 C.F.R. §133 (Federal) and in chapter 173-221 WAC (state).

Secondary treatment requirements are the minimum level of control that must be imposed in a permit for a publicly owned treatment work (POTW)(40 CFR § 125.3(a)). State domestic wastewater discharge standards based on secondary treatment in chapter 173-221 WAC include minimum effluent quality requirements for five-day biochemical oxygen demand (BOD₅), **total suspended solids** (TSS), pH and fecal coliform. The state regulation supplements 40 C.F.R. §133 and takes precedence over the federal regulation because it is more stringent in its application.

Since the promulgation of the rule, Ecology's permit writers have applied requirements in Chapter 173-221 WAC to all domestic WWTPs. When developing an NPDES permit, permit writers must consider technology-based limitations and also water-quality based effluent limitations and select the more stringent of the two (40 CFR §122.44(a)(1) and 125.3). Additional water quality based effluent limits (WQBEL) are developed when they are necessary to protect the receiving water.

Municipal Wastewater Discharges and AKART

While Ecology believes that the requirements in Chapter 173-221 WAC do constitute a level of treatment that is reasonable for domestic WWTPs, the concept of Washington's AKART rule for domestic WWTPs has started to evolve. This is primarily due to advancements in treatment technology that are capable of removing some pollutants at a higher level than traditional secondary treatment.

At the same time, DO deficits caused by nutrient pollution in surface waters across the state of Washington have become much more pervasive. While this comes from a combination of point and non-point sources, domestic WWTPs discharging at secondary treatment levels contribute to the nutrient over enrichment. This is because the conventional secondary treatment system design does not substantially remove enough nutrients (e.g., nitrogen and phosphorus) from the effluent to avoid over enrichment of the receiving water.

The prevalence of **303(d)** listings related to depleted dissolved oxygen levels from increased levels of nitrogen and phosphorus requires Ecology to reconsider the basis of AKART for domestic WWTPs. It is apparent that the agency must start to consider refining what constitutes AKART for this treatment category. The AKART provision needs evaluation on a case-by-case basis given its direct ties to economic impact. What constitutes AKART at one facility may be different at the next. This is especially true when considering the size differences between WWTPs, available space for expansion at the existing location, costs of

additional treatment processes, the rate payer base and any identified hardship that may exist due to the median household income in the community.

All POTWs proposed for coverage under this general permit currently discharge under the conditions of individual NPDES permits and are, at a minimum, required to meet TBELs as defined in 173-221 WAC. Ecology is not proposing additional TBELs as part of this general permit coverage. However, the proposed permit will require each facility to evaluate AKART for nitrogen removal and to submit a report documenting this evaluation to Ecology. Specific requirements for the analysis can be found later in this fact sheet in the [Description of Special Conditions](#) section and in Special Conditions S4.D and S5.D in the draft permit.

Non-Routine Discharges

Municipal wastewater discharges are fairly predictable in nature. This permit does not authorize non-routine or unanticipated discharges. Permittees must follow procedures listed in their individual permit in the event of a non-routine discharge.

SURFACE WATER QUALITY LIMITS

In order to protect existing water quality and preserve the designated **beneficial uses** of Washington's surface waters, WAC 173-201A-510 states that waste discharge permits shall be conditioned such that the discharge will not cause a violation of established Surface Water Quality Standards. The Washington State Surface Water Quality Standards (Chapter 173-201A WAC) is a state regulation designed to protect the **designated uses** of the surface waters of the state. Surface water quality-based effluent limitations may be based on an individual waste load allocation (WLA), a WLA developed during a basin-wide **total maximum daily loading** study (TMDL) or on a WLA developed as part of an **alternative restoration plan**.

NUMERIC CRITERIA FOR THE PROTECTION OF AQUATIC LIFE

"Numeric" water quality criteria are numerical values set forth in the State of Washington's Water Quality Standards for Surface Waters (Chapter 173-201A WAC). They specify the maximum levels of pollutants allowed in receiving waters to be protective of aquatic life. Numeric criteria set forth in the Water Quality Standards are used along with chemical and physical data for the wastewater and receiving water to derive the effluent limits in a discharge permit. When surface water quality-based limits are more stringent or potentially more stringent than technology-based limitations, they must be used in a discharge permit.

NUMERIC CRITERIA FOR THE PROTECTION OF HUMAN HEALTH

The EPA has promulgated numeric water quality criteria for the protection of human health that are applicable to Washington State (40 CFR 131.45) in addition to human health criteria listed in Chapter 173-201A WAC. These criteria are designed to protect humans from cancer and other diseases, primarily from fish and shellfish consumption and drinking water from

surface waters. This proposed permit does not contain any numeric effluent limits for the protection of human health. Each POTW's individual NPDES permit contains a facility specific assessment of the facility's potential to violate human health criteria. Any necessary effluent limits for these pollutants are located in the Permittee's individual NPDES permit.

NARRATIVE CRITERIA

In addition to numeric criteria, "narrative" water quality criteria (WAC 173-201A-260) limit toxic, radioactive, or deleterious material concentrations below those which have the potential to adversely affect characteristic water uses, cause acute or chronic toxicity to biota, impair aesthetic values, or adversely affect human health. Narrative criteria protect the specific beneficial uses of all fresh water and marine water in the state of Washington.

ANTIDEGRADATION

The purpose of Washington's **Antidegradation** Policy (WAC 173-201A-300-330; 2006) is to:

- Restore and maintain the highest possible quality of the surface waters of Washington.
- Describe situations under which water quality may be lowered from its current condition.
- Apply to human activities that are likely to have an impact on the water quality of surface water.
- Ensure that all human activities likely to contribute to a lowering of water quality, at a minimum, apply all known, available, and reasonable methods of prevention, control, and treatment (AKART).
- Apply three Tiers of protection (described below) for surface waters of the state.

Tier I ensures existing and designated uses are maintained and protected and applies to all waters and all sources of pollutions. Tier II ensures that waters of a higher quality than the criteria assigned are not degraded unless such lowering of water quality is necessary and in the overriding public interest. Tier II applies only to a specific list of polluting activities. Tier III prevents the degradation of waters formally listed as "outstanding resource waters," and applies to all sources of pollution.

Ecology considered Tier I and Tier II in this permit and determined there are no discharges under this permit to formally designated "outstanding resource waters."

Ecology always considers Tier I when it issues a permit. Applying both technology based permit limits and water quality-based limits to point source discharges meets Tier 1 requirements and the fact sheet describes how this permit meets those requirements.

Tier II requirements for general permits are given in 173-201A-320(6) as follows:

(a) Individual activities covered under these general permits or programs will not require a Tier II analysis.

(b) The department will describe in writing how the general permit or control program meets the antidegradation requirements of this section.

(c) The department recognizes that many water quality protection programs and their associated control technologies are in a continual state of improvement and development. As a result, information regarding the existence, effectiveness, or costs of control practices for reducing pollution and meeting the water quality standards may be incomplete. In these instances, the antidegradation requirements of this section can be considered met for general permits and programs that have a formal process to select, develop, adopt, and refine control practices for protecting water quality and meeting the intent of this section. This adaptive process must:

(i) Ensure that information is developed and used expeditiously to revise permit or program requirements;

(ii) Review and refine management and control programs in cycles not to exceed five years or the period of permit reissuance; and

(iii) Include a plan that describes how information will be obtained and used to ensure full compliance with this chapter. The plan must be developed and documented in advance of permit or program approval under this section.

(7) All authorizations under this section must still comply with the provisions of Tier I (WAC 173-201A-310).

This fact sheet describes how the permit and control program meets the antidegradation requirement. Ecology used a formal process to develop the PSNGP and will do so every five years for reissuance. The process includes selecting, developing, adopting, and refining control practices to protect water quality and meet the intent of WAC 173-201A-320. All NPDES permits, including the PSNGP, are effective for a fixed term not to exceed five years (40 CFR §122.25). Each time Ecology reissues the PSNGP, the agency will evaluate the effluent limits and permit conditions to determine if the revised permit should incorporate additional or more stringent requirements. This evaluation includes a review of new data and input from the public.

CRITICAL CONDITIONS

Surface water quality-based limits are derived for the water body's **critical condition**, which represents the receiving water and waste discharge condition with the highest potential for adverse impact on the aquatic biota, human health, and existing or characteristic water body uses. The factors include the flow and background level of toxic substances in the receiving water and the flow and concentration of toxic substances in the discharge.

Acute conditions are changes in the physical, chemical, or biological environment which are expected or demonstrated to result in injury or death to an organism as a result of short-term exposure to the substance or detrimental environmental condition.

Chronic conditions are changes in the physical, chemical, or biological environment which are expected or demonstrated to result in injury or death to an organism as a result of repeated or constant exposure over an extended period of time to a substance or detrimental environmental condition.

Ecology has not established a critical condition for the Puget Sound region at this time. Longer residence times occur in Puget Sound during summer months when **watershed inflows** subside. This period, which includes longer days and warmer temperatures generally create what Ecology considers a critical season. At present, Ecology is working to determine how to meet standards during all parts of the year everywhere within Puget Sound. The draft Nutrient Reduction Plan will address the definition of a critical condition for the receiving water. Narrative limits will apply for the entire first permit cycle and the critical condition for the receiving water will be considered as part of the second permit iteration.

MIXING ZONES

The Water Quality Standards allow Ecology to authorize **mixing zones** around a point of discharge in establishing surface water quality-based effluent limits. Ecology may authorize both "acute" and "chronic" mixing zones for pollutants as long as the discharge does not interfere with the designated uses of the receiving waterbody. The concentration of pollutants at the boundary of these mixing zones may not exceed the numerical criteria for that type of zone. Mixing zones can only be authorized for discharges that meet AKART and in accordance with other mixing zone requirements of WAC 173-201A-400.

The proposed permit does not authorize mixing zones specific to total inorganic nitrogen. Since a general permit must apply to a number of different **sites**, precise mixing zones and the resultant dilution are not applicable to facilities covered under a general permit.

Mixing zone authorizations in accordance with WAC 173-201A-400 can be found in the POTW's individual NPDES permit.

DESCRIPTION OF THE RECEIVING WATER

The draft general permit applies to POTWs directly discharging to Washington waters of the Salish Sea that cumulatively contribute to impairments within the greater Puget Sound region. Discharges will enter waters assigned designated uses intended to protect aquatic life and human health.

DESIGNATED USES AND SURFACE WATER QUALITY CRITERIA

Sections 173-201A-200 through -260 WAC define the applicable surface water quality criteria for protection of aquatic biota. These criteria were established to protect existing and potential uses of the surface waters of the state. Consideration was also given to both the natural water quality and its limitations. The surface water quality criteria are an important component of the state's Surface Water Quality Standards (Chapter 173-201A WAC).

Washington's marine aquatic life uses are broken into four primary categories created to provide protection for indigenous fish and non-fish aquatic species living in waters of the state. Aquatic life designations in Puget Sound span each of the categories given the complexity of the receiving water and its sensitive ecoregions.

- Extraordinary quality salmonid and other fish migration, rearing, and spawning; clam, oyster, and mussel rearing and spawning; crustaceans and other shellfish (crabs, shrimp, crayfish, scallops, etc.) rearing and spawning
- Excellent quality salmonid rearing and migration; other fish migration, rearing, and spawning; clam, oyster, and mussel rearing and spawning; crustaceans and other shellfish (crabs, shrimp, crayfish, scallops, etc.) rearing and spawning.
- Good quality salmonid migration and rearing; other fish migration, rearing and spawning; clam, oyster, and mussel rearing and spawning; crustaceans and other shellfish (crabs, shrimp, crayfish, scallops, etc.) rearing and spawning.
- Fair quality salmonid and other fish migration

Each of these aquatic life designations has associated numeric criteria for temperature, dissolved oxygen, turbidity and pH. This draft permit specifically regulates total inorganic nitrogen due to its impact on DO. See individual NPDES permits and their accompanying fact sheets for discussions regarding how each discharge meets numeric criteria for other parameters.

Table 3, below shows the lowest 1-day minimum DO criteria for each of the marine aquatic life uses as presented in Table 210(1)(d), in Chapter 173-201A WAC. The standards also include a provision to account for natural conditions. *“When a water body’s DO is lower than the criteria in Table 210(1)(d) (or within 0.2 mg/L of the criteria) and that condition is due to natural conditions, then human actions considered cumulatively may not cause the DO of that waterbody to decrease more than 0.2 mg/L (Chapter 173-201A-210(1)(d)(i) WAC).”*

Table 3. Marine Aquatic Life Uses and Corresponding DO Criteria

Designated Use	DO Criteria, 1 day min
Extraordinary Quality	7.0 mg/L
Excellent Quality	6.0 mg/L
Good Quality	5.0 mg/L
Fair Quality	4.0 mg/L

Ecology established marine DO standards at levels that support healthy and robust aquatic species and limit the cumulative impacts of human actions to prevent measurable depletion of DO from the natural condition. This draft permit supports the goals of the overall Puget Sound Nutrient Reduction Project by establishing requirements based on attaining the numeric marine DO criteria and minimizing cumulative human impacts.

Figure 1, shows where numeric water quality standards for DO apply for the Washington Waters of the Salish Sea, including Puget Sound.

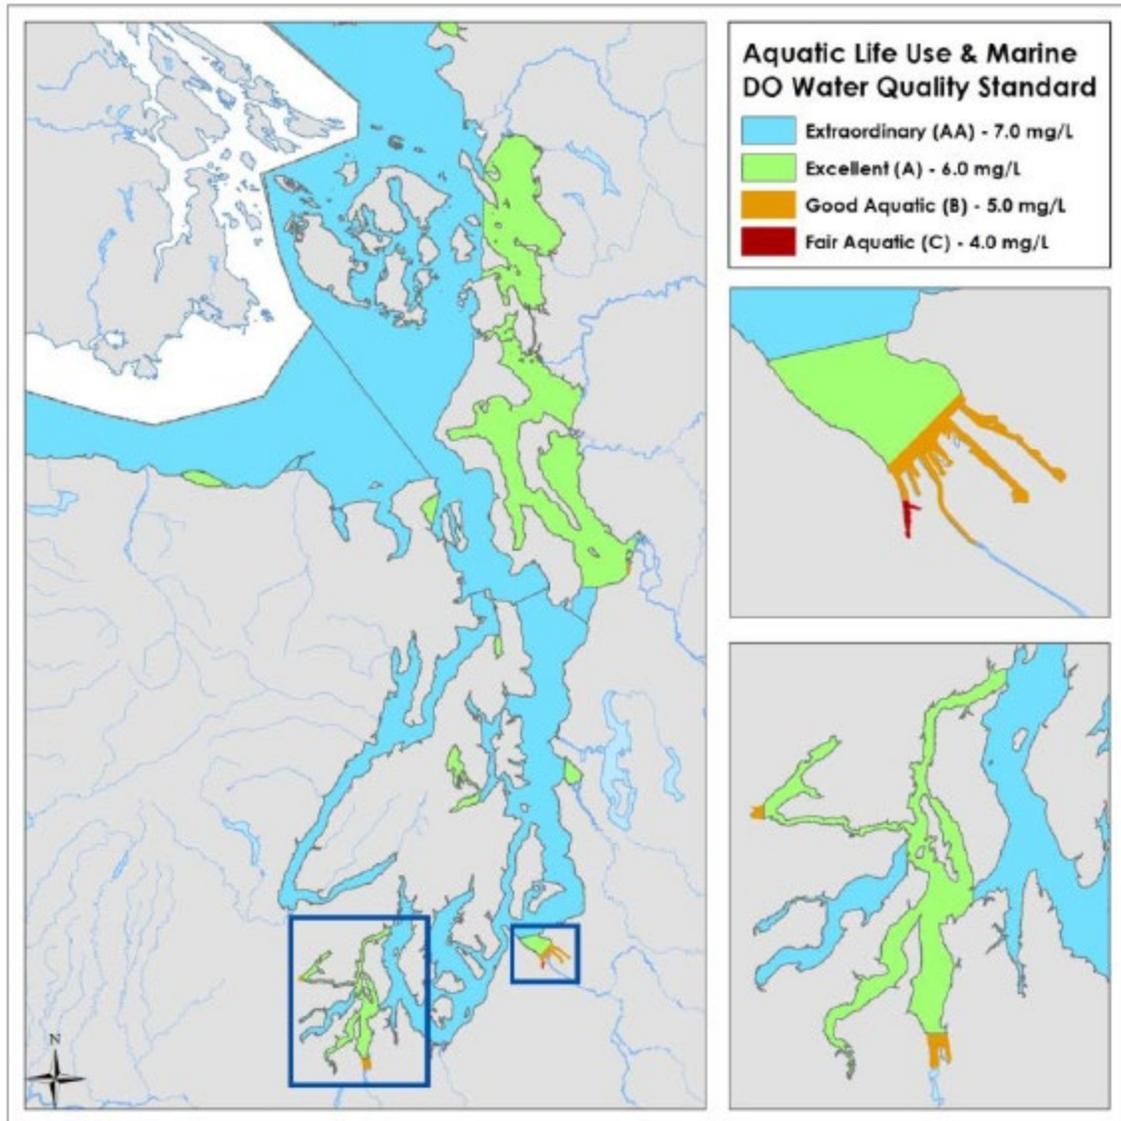


Figure 1. Dissolved Oxygen Standards in Puget Sound

Application of the numeric marine DO surface water quality criteria to a discharge requires site-specific analysis of the discharge and the receiving water. This analysis is part of the modeling work being completed by Ecology and will inform future numeric water quality based permit limits for nutrients that impact DO concentrations. See the [Consideration of Narrative Water Quality Based Effluent Limits for Numeric Criteria](#) section of this fact sheet for more information about narrative water quality effluent limits proposed for the first permit cycle.

HISTORY OF DISSOLVED OXYGEN IMPAIRMENTS AND INVESTIGATIONS

The 1996/1998 Water Quality Assessment included the first 303(d) DO listings for portions of Southern Puget Sound based on failure to meet the numeric portion of the DO standard. Following this initial listing, Ecology began to study how nutrients from both point and non-

point sources affected DO in the south sound region (Roberts, et al., 2008). Recent studies led Ecology to determine that anthropogenic (human) sources of nutrients lead to instances of low DO concentrations throughout Puget Sound (Khangaonkar et al., 2018, Pelletier et al., 2017, Ahmed et al., 2014, Roberts et al., 2014, Khangaonkar et al., 2012 b, Albertson et al., 2002) exacerbating those effects in areas that may have naturally occurring lower DO and creating additional conditions (areas or duration) where water quality standards are not met.

Newton and Van Voorhis (2002) documented that nitrogen is a limiting nutrient for Puget Sound. While other nutrients like carbon and phosphorus may drive some algal productivity, the available amount of nitrogen primarily controls the rate of algae and aquatic plant growth. The open ocean boundary will always deliver the highest nitrogen load to the **Salish Sea**. The additional nitrogen load from human inputs, above the natural background, exacerbates the nutrient over- enrichment and leads to **eutrophication**.

The Salish Sea's shallow bays and terminal inlets, like Budd Inlet in South Puget Sound, are the most sensitive to eutrophication due to diminished flushing rates when compared to other basins with higher rates of water exchange (Ahmed et al., 2017, Khangaonkar et al., 2012 b, Sutherland et al., 2011). Eutrophication will continue to worsen as the regional population increases if actions to reduce human nutrient sources from domestic wastewater, agricultural runoff and other land-use activities are not taken (Khangaonkar et al., 2019, Roberts et al., 2014). The SSM Year 1 Tech Memo (currently in publication) found that failure to address human nutrient loads from domestic WWTPs will increase both the number of days and the size of areas that do not meet the numeric DO standard in both high and low population estimates for 2040 (Ahmed et al., 2021). Figure 2, shows the percent increase from projected low and high flow estimates based on 2040 population.

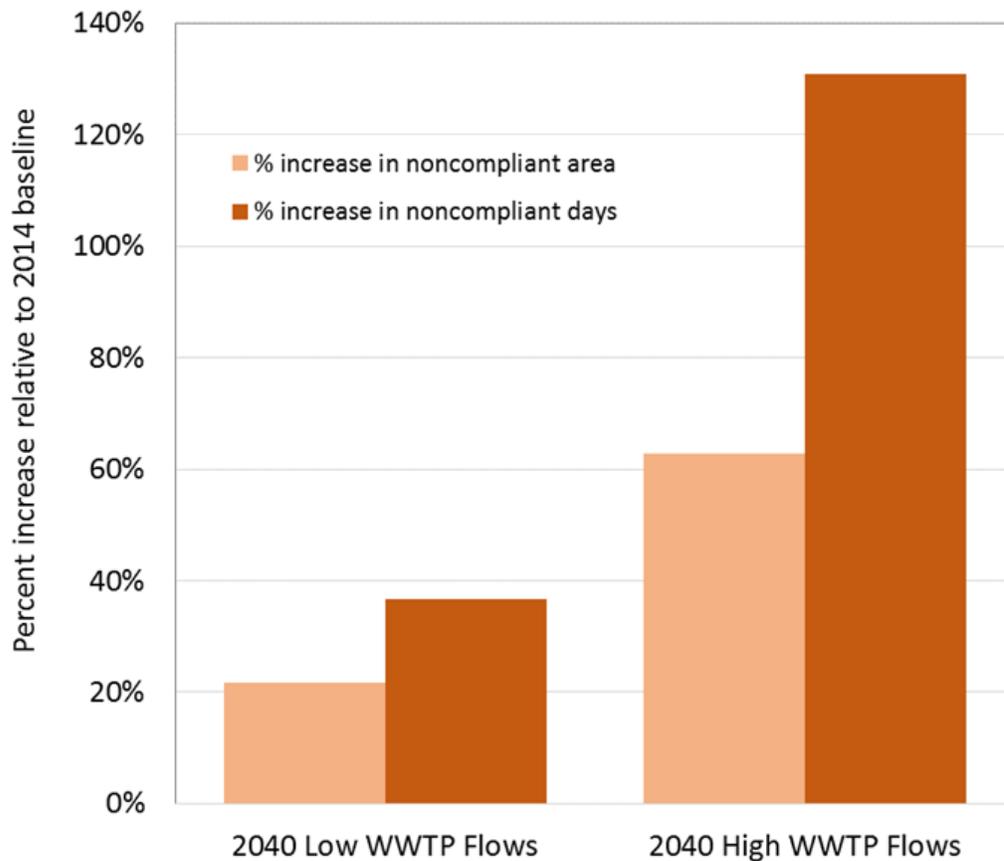


Figure 2. Predicted increase in the DO noncompliant areas and days in Washington Waters of the Salish Sea from projected 2040 low and high WWTP flows.

These projections, on top of the existing DO impairments currently observed in Puget Sound, indicate a trajectory that will disrupt the already fragile ecosystem. After years of working to develop and understand the science, Ecology started the ***Puget Sound Nutrient Source Reduction Project (PSNSRP)*** in 2018. The PSNSRP aims to collaboratively address reducing point and nonpoint sources of nutrients in our region so that the DO water quality criteria and aquatic life designated uses are met by 2040.

The Salish Sea Model (SSM)

As previously discussed, nitrogen is the limiting nutrient driving eutrophication and DO impairment within inlets and embayments in Washington’s portion of the Salish Sea. In addition to nitrogen, discharges of organic carbon into marine waters may also directly reduce DO from aerobic bacteria decomposition. Without numeric surface water quality standards for nitrogen or organic carbon, Ecology uses DO as the indicator pollutant to monitor the deleterious effects of excess nitrogen and organic carbon loading in marine waters. Ecology used water quality monitoring data to identify waters on the 303(d) list, but separating the impairment due to

cumulative human nutrient loads requires use of a mechanistic model to determine impacts to marine water quality in a complex system like the Salish Sea.

Originally developed as the Puget Sound Model (PSM), the state of the art ***Salish Sea Model*** (SSM) developed by Pacific Northwest National Labs (PNNL) in collaboration with Ecology has become the computer modeling tool used by Ecology to evaluate the physical, chemical and biological relationships within the Salish Sea. This modeling tool provides Ecology with the ability to predict compliance with marine water quality standards and evaluate nutrient (nitrogen and organic carbon) reduction options for improving and restoring Washington waters of the Salish Sea to meet water quality goals (McCarthy, 2018, Ahmed, et. al, 2019). Over its various development phases, the SSM has endured extensive internal and external peer reviews and constitutes the best available science for regulatory decisions made by Ecology.

On March 9, 2021, Ben Cope (2021) from EPA Region 10 discussed regulatory models with the Puget Sound Nutrient Forum (PSNF) and more specifically, the application of the SSM for regulatory purposes. According to EPA, mechanistic models have a history of being used for regulatory decision making as they provide the scientific basis for quantifying impacts from pollution sources upon source identification. Use of a mechanistic model also allows for the evaluation of different outcomes based on different pollutant reduction alternatives. Models also enable scientists to make predictions of future conditions and system changes such as impacts from increased populations or climate.

A well-developed model is one that has thorough documentation through both development and application. This includes making sure that all data review processes, equations and assumptions are clearly identified. Input data also needs to be comprehensive in nature for all sources being evaluated. Peer review and public review are very important steps when using a model for regulatory purposes. These review processes work to increase transparency about the model's limitations and identify any uncertainty that may result from its application. A summary of the model development and application approach, with its inherent transparency and peer review phases is described below.

During the first phase of model development, Ecology convened a technical advisory committee (TAC) comprised of representatives from interested groups and agencies including NOAA, USGS, EPA, King County, People for Puget Sound, and University of Washington. The TAC participated in a series of events, including a workshop. [Appendix A of the first QAPP](#) (2009) for this effort contains details about what was covered on the November 4, 2008 TAC workshop, which, along with recommendations from PNNL, set the direction for the long-term project. In 2010, TAC members offered peer review comments about a November 2009 report which provided details about the first version of the intermediate scale model. In addition, EPA contracted with Tetra Tech as an independent third party to peer review the intermediate scale hydrodynamic version of the model. In 2012, Khangaonkar et al., 2012 a,b published a report and an article in a scientific, peer reviewed journal focused on the water quality calibration of the intermediate scale model. At this point, the project team acknowledged that incorporation of a dynamic

sediment diagenesis module would result in a more robust modeling system. The project team also decided to incorporate prediction capability for carbonate system parameters. In 2014, QAPPs were developed for that purpose, and feedback was solicited from internal and external regional scientists. In 2017, the project team completed incorporation of sediment diagenesis and the carbonate system module (Pelletier et al., 2017, Khangaonkar et al., 2018). Additionally, PNNL began work on expanding the model domain. Altogether, over twenty reports (in some instances externally reviewed as well as internally reviewed) and independently peer reviewed scientific papers have been published that cover all the updates to the modeling system that is now the intermediate scale model SSM that Ecology applies.

Following standard practices and methods, Ecology has traditionally used mechanistic models for TMDL development linking point and non-point nutrient sources to both DO and **pH** impacts in receiving waters. Model results form the basis of **wasteload allocations** and **load allocations** for point and non-point sources in the TMDL which, in turn, inform water quality based effluent limits for point sources. The SSM is a typical regulatory model in that sense and has gone through several development steps since starting out as the PSM. What sets the SSM apart from the other regulatory models used by Ecology is the large scale and complexity of the waterbody lending its name to the tool. Models this size are not typical; however, according to EPA, they have been used in regulatory decision making for other large, complex bodies of water with DO impairments like the Chesapeake Bay. As described above, multiple SSM-related publications have documented the complexities, refinements, predictive skill and assumptions of the SSM and its improvements since its early days as the PSM.

EPA also addressed model uncertainties and acceptance in detail during the presentation to the PSNF (Cope, 2021). All water quality models have inherent levels of uncertainty. While the goal is to strive for a model's output to match observations there will always be some amount of model error. Matching patterns of freshwater input volume, vertical mixing and interbasin mixing is one way to understand the scale of the model error when comparing results to observations. It is important to note that no numeric state or federal guidelines exist for "acceptable" model error. EPA does have general guidelines for what constitutes a quality model for decision making in their *Guidance on the Development, Evaluation, and Application of Environmental Models* (CREM, 2009). Ultimately, the regulatory agency has the authority to determine what constitutes the best available science for decision making purposes. Ecology has determined that the SSM constitutes the best available science for determining the suite of point and non-point source reductions necessary to meet numeric water quality standards for DO. External opportunities to comment on and review the application of the SSM and the overall Puget Sound Nutrient Source Reduction Project occur in a separate process from the development of the draft PSNGP.

Documenting Reasonable Potential

Ecology documented review of the calibration, sensitivity analyses, and precision of the SSM in the [Puget Sound Nutrient Source Reduction Project Volume 1: Model Updates and Bounding Scenarios](#) ("Bounding Scenarios"), a report developed by the Environmental Assessment

Program. The goals of the modeling project were 1) to run the SSM with enhancements and updates while checking the calibration of the model and 2) use the calibrated model to run and evaluate the bounding scenarios to inform the overall nutrient reduction strategy for Washington waters of the Salish Sea (Ahmed et al., 2019). At a high level, the Bounding Scenarios report evaluated the regional impacts of cumulative human nutrient sources on DO concentrations both over time and space/area for the 2006, 2008, and 2014 model years, as well as the model predicted changes due to improved treatment at domestic WWTPs.

The results from the Bounding Scenarios report led Ecology to make the *reasonable potential* determination for domestic WWTPs discharging directly to the Washington waters of the Salish Sea. Specifically, the following key findings from the Bounding Scenarios report led Ecology to make this determination:

1. The estimated breakdown of the land-based inflows for dissolved inorganic nitrogen (DIN), on an annual basis, is the following: marine domestic point sources (WWTPs) contribute around 30,540 kg/day compared to rivers which contribute around 25,240 kg/day. WWTPs are the dominant land-based dissolved inorganic nitrogen (DIN) source during the low flow (summer) months.
2. Consistent with the findings from Mohamedali, et.al (2011), WWTPs contribute a much larger proportion (92%) of the anthropogenic DIN loads to Washington waters of the Salish Sea during the low flow season.
3. In addition to localized impacts from direct discharges, excess nutrients discharged from these domestic WWTPs in one location cumulatively contribute to DO impairments in other locations due to the water exchange that occurs between basins.

When a permitting authority makes the determination that a discharge causes, has the reasonable potential to cause, or contributes to an in-stream excursion above the numeric water quality standards for an individual pollutant, the permit must contain an effluent limit for that parameter (40 CFR § 122.44(d)(1)(iii)). Ecology determined for the first permit control of total inorganic nitrogen is an appropriate first step to address nutrient pollution from domestic WWTPs as inorganic nitrogen (the sum of nitrate-nitrite and ammonia) is the form of nitrogen more available for algal growth driving eutrophication and the existing DO impairments. For purposes of this permit, Ecology will use TIN as a conservative measure of DIN as the SSM did not use a ratio, or other method, to calculate an assumed dissolved component from existing TIN discharge monitoring report (DMR) data. Future permit cycles may include effluent limitations for other nutrient parameters (e.g., carbon) when modeling results show that additional reductions are necessary to meet DO standards in the receiving water.

Modeling work continues with the SSM in order to determine the scale of reductions necessary to meet numeric water quality standards for DO. As of Spring 2021, Year 1 Optimization scenarios are still being analyzed. In addition to the need to offset nutrient loads from population growth mentioned previously in this fact sheet, early results indicate greater need for water quality improvement from annual point source load reductions and also confirm the

need for watershed reductions to attain standards. Ecology will review these results internally prior to sharing results at the PSNF. When the analysis is complete, Year 1 results will help to scope further refinements for the Year 2 optimization scenarios with the PSNF.

Ecology plans to use the Year 2 optimization scenarios to evaluate targets for individual basin load reductions, watershed inflow load reductions and point source wasteload allocations for different basins. These Year 2 scenarios will constitute the basis from which numeric WQBELs will be developed. Ecology will combine both the Year 1 and 2 optimization results into a Volume 2 SSM Report which will go through an external review process. Following that review, Ecology will use the draft Puget Sound Nutrient Reduction Plan (NRP) to assign the applicable allocations, possibly at the basin level. See the Puget Sound Nutrient Reduction Project webpage (<https://ecology.wa.gov/Water-Shorelines/Puget-Sound/Helping-Puget-Sound/Reducing-Puget-Sound-nutrients/Puget-Sound-Nutrient-Reduction-Project>) for more information and an opportunity to receive updates on the project.

Puget Sound Nutrient Reduction Plan

The 2014 Water Quality Assessment found 136 impaired area 303(d) listings for DO in the Salish Sea and 331 Category 2 listings indicating waters of concern. With at least 10 years dedicated to the technical work and development of water quality models, Ecology has reached the point where the science clearly demonstrates that cumulative point and nonpoint sources deplete DO resulting in nonattainment of standards within Washington waters of the Salish Sea. In a traditional approach, Ecology would develop a formal Total Maximum Daily Load (TMDL) to address the impairments. Instead, Ecology elected to develop the Puget Sound Nutrient Reduction Plan (NRP) to comprehensively address reduction for all human nutrient sources to our valuable receiving water. The benefits of this alternative restoration plan approach include achieving cleaner water more quickly than a traditional TMDL and improved opportunities for stakeholder input throughout the document development.

Participants in the PSNF provided feedback in 2020 on a draft outline of high-level elements that Ecology intends to include in the NRP. Ecology will use the NRP to explain why nutrient reduction is vital to improving water quality and protecting the designated uses detailed in Chapter 173-201A-210 and this fact sheet. In addition to documenting Puget Sound's nitrogen loading capacity and both the point source and watershed inflow nutrient reduction targets, the publication will detail the strategy for addressing watershed point and nonpoint sources to meet watershed nutrient reduction targets. It will also describe the effectiveness monitoring and adaptive management approaches that Ecology will use to iteratively meet these reduction targets and develop a watershed nutrient reduction strategy. The rationale for all regulatory decisions contained in the NRP must also be included.

Ecology will consult the PSNF for feedback and input on parts of the NRP, especially as it pertains to the watershed reduction strategy. Once drafted, the NRP will also go through an extensive public review and comment period. Ecology will also invite Tribal consultation. Visit the Puget Sound Nutrient Reduction Project's Webpage (<https://ecology.wa.gov/Water-Shorelines/Puget-Sound/Helping-Puget-Sound/Reducing-Puget-Sound-nutrients/Puget-Sound->

[Nutrient-Reduction-Project](#)) for the most up to date information on this plan and other collaborative efforts.

AUTHORITY TO INCLUDE NON-NUMERIC WATER QUALITY-BASED LIMITS

Under EPA's regulations, non-numeric effluent limits are authorized in lieu of numeric limits, where "[n]umeric effluent limitations are infeasible." 40 CFR 122.44(k)(3). As far back as 1977, courts have recognized that there are circumstances when numeric effluent limitations are infeasible and have held that EPA may issue permits with conditions (e.g., Best Management Practices or "BMPs") designed to reduce the level of effluent discharges to acceptable levels. *Natural Res. Def. Council, Inc. v. Costle*, 568 F.2d 1369 (D.C.Cir.1977).

Through the Agency's NPDES permit regulations, EPA interpreted the CWA to allow BMPs to take the place of numeric effluent limitations under certain circumstances. 40 C.F.R. §122.44(k), entitled "Establishing limitations, standards, and other permit conditions (applicable to State NPDES programs ...)," provides that permits may include BMPs to control or abate the discharge of pollutants when: (1) "[a]uthorized under section 402(p) of the CWA for the control of stormwater discharges"; or (2) "[n]umeric effluent limitations are infeasible." 40 C.F.R. § 122.44(k).

More recently, the U.S. Court of Appeals for the Sixth Circuit also held that the CWA does not require the EPA to set numeric limits where such limits are infeasible. *Citizens Coal Council v. United States Environmental Protection Agency*, 447 F.3d 879, 895-96 (6th Cir. 2006). The *Citizens Coal* court cited to *Waterkeeper Alliance, Inc. v. EPA*, 399 F.3d 486, 502 (2d Cir. 2005), stating "site-specific BMPs are effluent limitations under the CWA." "In sum, the EPA's inclusion of numeric and non-numeric limitations in the guideline for the coal remining subcategory was a reasonable exercise of its authority under the CWA."

Additionally, the Sixth Circuit cited to *Natural Res. Def. Council, Inc. v. EPA*, 673 F.2d 400, 403 (D.C.Cir.1982) noting that "section 502(11) [of the CWA] defines 'effluent limitation' as 'any restriction' on the amounts of pollutants discharged, not just a numerical restriction."

EPA has substantial discretion to impose non-quantitative permit requirements pursuant to Section 402(a)(1)), especially when the use of numeric limits is infeasible. See *NRDC v. EPA*, 822 F.2d 104, 122-24 (D.C. Cir. 1987) and 40 CFR 122.44(k)(3).

RATIONALE FOR NON-NUMERIC WATER QUALITY-BASED EFFLUENT LIMITS

As discussed in this fact sheet Ecology's application of the Salish Sea Model (SSM) has shown that nutrients, particularly inorganic nitrogen, discharged from domestic wastewater treatment plants contribute to low dissolved oxygen concentrations in Puget Sound that do not meet state water quality criteria. As previously stated, the "Bounding Scenarios" report confirmed that circulation within the inner basins of Puget Sound distributes pollutant throughout the waters in the Puget Sound region. The circulation patterns showed how discharges in one basin can

affect the water quality in other basins. Thus, all wastewater discharges to the greater Puget Sound area containing nitrogen cumulatively contribute to existing DO impairments meeting the threshold for reasonable potential under 40 C.F.R. 122.44(d)(1)(iii).

When Ecology establishes reasonable potential for a discharge or group of discharges to violate surface water quality standards, the agency must implement a water quality based effluent limit (WQBEL) for that pollutant. While Ecology has enough information to determine reasonable potential exists, additional modeling work is still necessary to establish numeric WQBELs. Traditional effluent limit calculation tools for point sources are not appropriate in this instance for two reasons. First, these tools are based on limiting toxic pollutants that typically have more acute toxicity than nutrients and criteria with 1-day and 4-day averaging periods (durations). Comparatively, nutrients have much longer averaging periods on the order of weeks to months or longer (EPA, 2004). Second, Washington State uses numeric criteria for DO. The cause of depressed DO requires modeling to determine levels of nutrients that will not cause a violation of the DO criteria as allowed in 40 C.F.R. 122.44(d)(vi)(c). In a receiving water as complex as Puget Sound, the modeling work necessary to develop numeric WQBELs for each discharge is comprehensive and requires extensive internal and external review.

In accordance with 40 C.F.R. 122.44(k)(3), **best management practices (BMPs)** are appropriate to control or abate the discharge of pollutants when numeric effluent limits are infeasible. This permit through its requirements for **optimization** of current treatment processes to abate nutrient loads through the permit term, the use of an **action level** and treatment performance metrics serve as an indicator for optimization success, the requirement for dominant loaders to pursue additional nutrient reduction actions if the action level is exceeded, and early planning constitute a suite of BMPs that meet the intent of the federal regulation for this first permit cycle.

Ecology continues to review model results from the first year of optimization scenarios and scope future model runs through the Puget Sound Nutrient Forum. Additional model runs will be defined in 2021 to further quantify far and near field effects of wastewater discharges to marine waters along with the anthropogenic nutrient loads from Puget Sound watershed. Once Ecology can establish a nutrient loading capacity that meets DO criteria in the marine waters of Puget Sound, allocations that will lead to numeric WQBELs can be established. The NRP will include draft allocations for point sources and watershed inflows. After internal and external review, the allocations will be finalized and numeric WQBELs will no longer be infeasible. It is anticipated that for the second iteration of this permit the approach will shift to working towards compliance with those numeric limits.

CONSIDERATION OF NARRATIVE SURFACE WATER QUALITY-BASED LIMITS FOR NUMERIC CRITERIA

As previously stated, 40 CFR §122.44 requires the permit to contain effluent limits to control all pollutants or pollutant parameters which are, or may be, discharged at a level which will cause, have the reasonable potential to cause, or contribute to an excursion above any water quality standard.

Ecology documented reasonable potential with the determination that domestic wastewater discharges may cause or contribute to a violation of surface water quality standards for dissolved oxygen. Therefore, the draft permit includes BMP based, narrative water quality-based effluent limits to control discharges as necessary to meet applicable water quality standards for DO as allowed under 40 CFR § 122.44(k).

Ecology proposes two sets of narrative limits for two categories of dischargers. Proposed narrative limits for all plants require Permittees to actively reduce their contribution as much as possible during the permit term. However, the group of Permittees that constitute the dominant TIN load into Puget Sound must do more than the Permittees with the smallest TIN loads. Ecology determined that the dominant loads from eligible Permittees constitute approximately 99% of the total domestic point source load discharged to Puget Sound. TIN loads exceeding 100 lbs/day qualify as dominant loads.

All Permittees must monitor their influent and effluent, optimize existing treatment and begin planning for the future. Dominant loaders also have a facility specific action level that represents the current discharge condition and drives corrective actions when the level is exceeded for two consecutive years or three times during the permit term. If the dominant loader triggers the corrective action, they must reduce their effluent load by 10%. If a jurisdiction with a bubbled action level triggers a corrective action, the 10% reduction applies to the bubbled total. Unless the corrective action selected by the Permittee includes a design previously approved by Ecology, qualifying Permittees must submit an abbreviated engineering report or a technical memo signed and stamped by a professional engineer detailing the proposed solution with the Annual Report submittal following the initial action level exceedance.

Ecology proposes to implement a less aggressive approach for the Permittees with the smallest TIN loads given that they collectively represent approximately 1% of the domestic point source anthropogenic load. Ecology calculated average daily TIN loads for Permittees using 2019 DMR data to determine the categorization. This approach differs from what Ecology proposed in the Preliminary Draft. The Preliminary Draft included a more universal approach for all Permittees with no consideration of requirements based on TIN load magnitudes. While the smallest loaders must still work to reduce their effluent TIN loads, the proposed requirements in the draft permit now better reflect their minimal contribution to the existing impairments.

This proposed general permit supplements the individual NPDES permits held by the dischargers proposed for coverage. The individual NPDES permits supply the technology-based and water quality-based effluent limits as well as requirements for controlling other pollutants in the facility's discharge. Ecology anticipates that implementing the optimization requirements in the draft permit and the application of adaptive management through the BMP approach will result in wastewater discharges that minimize cumulative contributions to violations of the state's Surface Water Quality Standards (Chapter 173-201A WAC) during the permit term. Numeric limits remain infeasible because modeling is not yet complete. Therefore, the draft permit includes narrative water quality-based effluent limits (WQBELs) to control discharges as

necessary to meet applicable water quality standards for DO. The provisions of S3 Compliance with Standards, provisions of S4 and S5 Requirements for Permittees (Dominant and Small), S6 Monitoring Schedules and Sampling Requirements, and S7 Discharges to 303(d) or TMDL Water Bodies constitute the narrative WQBELs in the draft permit.

Condition S3. Compliance with Standards

Condition S3 prohibits discharges that cause or contribute to violations of Surface Water Quality Standards (Chapter 173-201A WAC), Sediment Management Standards (Chapter 173-204 WAC), and human health-based criteria in the Federal water quality criteria applicable to Washington (40 CFR §135.45).

Each Permittee must control its discharge as necessary to meet applicable water quality standards. Ecology considers compliance with the narrative conditions in the draft permit (e.g., action levels, optimization, planning, monitoring, and any necessary corrective actions) as adequate control necessary for dischargers to meet applicable water quality standards during the permit term.

The Permittee must take corrective action if they become aware, or if Ecology issues a determination through a notice of non-compliance, that the discharge causes or contributes to a water quality standards exceedance. In addition, Ecology may require additional monitoring at any time during the permit term if information suggests that the discharge lacks the controls necessary to meet applicable water quality standards.

Condition S4. Requirements for WWTPs with Dominant TIN Loads

Authorized Discharges – Discharges conditionally authorized by the permit include wastewater discharges from POTWs constituting greater than 99% of the current domestic point source anthropogenic TIN load to Washington Waters of the Salish Sea.

Domestic Wastewater Discharges constituting the largest TIN loads – The narrative water quality-based limits for domestic wastewater discharges includes a suite of BMPs required over the duration of the permit term. These BMPs include:

- monthly monitoring requirements;
- a numeric action level for total inorganic nitrogen (lbs/year) that require implementation of treatment optimization to stay under the action level;
- an annual Nitrogen Optimization Plan; and,
- early planning through the Nutrient Reduction Evaluation that includes an AKART analysis and evaluating alternatives to meeting 3 mg/L TIN (or the equivalent load) both annually and seasonally.

The suite of BMPs that constitute narrative WQBELs are unique to this permit term. They require the permittee to document and assess the adaptive management procedures used to

reduce nutrients in their effluent. The TIN action level is used in the draft general permit as this is the primary pollutant of concern as identified through investigations into existing DO impairments in the greater Puget Sound area. All domestic wastewater discharges contain inorganic nitrogen with human urine being the primary source.

Condition S5. Requirements for WWTPs with Small TIN Loads

Authorized Discharges – Discharges conditionally authorized by the permit include wastewater discharges from POTWs constituting less than 1% of the current domestic point source anthropogenic TIN load to Washington Waters of the Salish Sea.

Domestic Wastewater Discharges with the Smallest TIN loads– The narrative water quality-based limits for domestic wastewater discharges includes a suite of BMPs required over the duration of the permit term. These BMPs include:

- monthly monitoring requirements;
- treatment optimization requiring submittal of an optimization report; and,
- an AKART analysis specific to nitrogen removal.

The suite of BMPs that constitute narrative WQBELs are unique to this category of discharger during the permit term. They require the permittee to document, quantify, and analyze the adaptive management procedures used to reduce nutrients in their effluent.

Condition S6 Monitoring Schedules and Sampling Requirements

Ecology has included monitoring requirements as part of the narrative water quality based effluent limits for Permittees listed in Conditions S4 and S5. Required influent and effluent monitoring will inform the adaptive management component of the draft permit and support the optimization requirements for all Permittees.

Condition S7 Discharges to 303(d) or TMDL Water Bodies

Ecology cannot allow a new discharge to a listed waterbody (issuance of permit is prohibited) if the discharge will cause or contribute to a violation of water quality standards. Ecology may allow a new discharge if it meets the applicable water quality criteria. The applicable federal regulation is 122.4(i) Sec. 122.4 Prohibitions. *No permit may be issued: i) To a new source or a new discharger, if the discharge from its construction or operation will cause or contribute to the violation of water quality standards.*

The draft PSNGP establishes narrative water quality-based numeric effluent limits for domestic WWTPs as identified in S4 and S5. These limits will also apply to any discharges to certain waters that are listed as impaired under Section 303(d) of the Clean Water Act. Numeric effluent limits will replace these narrative effluent limits after establishing a facility specific compliance period once Ecology completes the alternative restoration plan (e.g., Nutrient Reduction Plan) or EPA approves a TMDL.

All references and permit requirements associated with Section 303(d) of the Clean Water Act pertain to the most current EPA-approved 303(d) listing of impaired waters that exists when a complete application for coverage is submitted to Ecology. Ecology has determined that domestic WWTPs have the potential to cause or contribute to violations of water quality standards in waterbodies that are 303(d) listed for DO, and must comply with the narrative effluent limit(s) in S4 and S5 of the permit.

SEDIMENT QUALITY

Ecology has promulgated Sediment Management Standards (Chapter 173-204 WAC) to protect aquatic biota and human health. These standards state that Ecology may require Permittees to evaluate the potential for the discharge to cause a violation of applicable standards (WAC 173-204-400). The permit requires adaptive management to limit discharge of total inorganic nitrogen. This general permit contains no requirements for protecting sediment quality. Impacts to sediments are assessed during the development of the individual permits currently held by all POTWs proposed for coverage under this general permit. Specific facility requirements for meeting sediment management standards can be found in the POTW's individual NPDES permit.

GROUND WATER QUALITY LIMITATIONS

Ecology has promulgated Ground Water Quality Standards (Chapter 173-200 WAC) to protect beneficial uses of ground water. Permits issued by Ecology prohibit violations of those standards (WAC 173-200-100). This permit does not authorize any discharges to groundwater.

ANTI-BACKSLIDING

NPDES permits may not be reissued, renewed, or modified with less stringent limitations or conditions than those defined in a previous permits unless the changes comply with anti-backsliding requirements in 40 CFR 122.44(l)(1-2). Technology based effluent limits, water quality based effluent limits, and applications of best professional judgement are subject to anti-backsliding provisions.

DESCRIPTION OF SPECIAL CONDITIONS

This section follows the structure of the draft Puget Sound Nutrient General Permit (PSNGP), but does not restate language used in the permit. The information presented below is intended to help the public understand the intent and basis of the draft permit.

S1. PERMIT COVERAGE

A. Coverage Area and Eligible Discharges. The PSNGP is a regional permit. It provides permit coverage for discharges of domestic wastewater from publicly owned treatment works (POTWs) known to contain inorganic nitrogen within Washington’s waters of the Salish Sea, excluding federal land, tribal land and certain tribal waters.

A definition of “Permittee” is not provided in chapter 90.48 RCW, 173-220, or 173-226 WAC, nor is one provided in 40 CFR 122 (EPA NPDES Permit Program) or State NPDES Permit Programs. Based upon the usage of Permittee in federal and Washington State law, Ecology takes the term “Permittee” to mean the person or entity that discharges or controls the discharge of pollutants to waters of the state and holds permit coverage allowing that specific discharge. For the Puget Sound Nutrient General Permit, Ecology is clarifying that the permit may be held by Washington State municipalities who currently hold an individual NPDES permit and are represented as a discrete, domestic point source in the Salish Sea Model (SSM).

This PSNGP identifies the municipal POTWs that must seek permit coverage. “POTW” is defined as a sewage treatment plant that is owned and usually operated by a local government agency designed to treat domestic sewage.

This PSNGP addresses discharges from POTWs into Puget Sound’s marine and estuarine waters that are known to contain inorganic nitrogen. Permittees are divided into two categories. While the type of discharge is the same amongst the domestic dischargers, the current TIN loads vary widely. This permit mandates more stringent requirements for the dominant loaders (those constituting 99% of the current domestic point source TIN load) due to their contribution to the existing nitrogen over enrichment. Smaller plants, those that discharge less than 1% of the TIN load must also work towards reducing nitrogen in their discharge; however, requirements for these facilities take into account the scale of their contribution. Categories for domestic WWTPs that must apply for coverage under the draft permit are identified using (D) and (S) for dominant and small TIN loads in draft permit section S1.A, Table 3. Ecology determined these categories by ranking cumulative average daily TIN loads for each of the 58 WWTPs using 2019 DMR data. See [Appendix D](#) in this fact sheet for the cumulative ranking results.

B. Limits on Coverage. This section identifies the types of discharges that are not authorized by the permit. These include discharges from:

1. WWTPs that are federally owned or operated, or located on tribal land, or discharge to tribal waters with EPA approved water quality standards.
2. Privately owned WWTPs currently permitted by Ecology with an individual NPDES permit.
3. POTWs located in tributary watersheds feeding Puget Sound

4. Industrial WWTPs discharging to Puget Sound.

Ecology does not have authority to write NPDES permits for federal and tribal facilities. EPA is the responsible permitting authority for these plants in Washington State. Conditions for nutrient controls will be implemented for these facilities through the 401 Water Quality Certification process.

In 2000, Ecology modified the Washington Administrative Code that provides terms and conditions for NPDES permits, Chapter 173-220-150(4). This rule change requires permits for domestic wastewater facilities be issued only to public entities after the modification date. Private facilities excluded from coverage under the PSNGP all have individual NPDES permits issued prior to the rule change. These plants must incorporate into a public entity such as a sewer district in the event of a treatment process change or expansion. Because Ecology does not issue new NPDES permits to private entities any longer, these private plants are excluded from coverage under the PSNGP. Nutrient controls will be implemented at the time of individual permit reissuance for these private treatment plants. Ecology has developed a permit issuance schedule for these plants prioritizing those that discharge to more sensitive ecoregions of Puget Sound.

Twenty-six (26) POTWs discharge to rivers that feed into Puget Sound at locations currently outside of the SSM grid. Ecology accounts for the nutrients from these plants as part of the aggregated watershed loads in the model. Determining the impact of these discharges on Puget Sound dissolved oxygen requires additional modeling tools. Ecology plans to develop these additional watershed modeling tools during the first PSNGP five year term. Coverage may expand to include these facilities during the second permit term. Some of these POTWs have wasteload allocations for nutrients based on DO TMDLs in their respective watersheds. Any future general permit coverage would take into account these EPA approved wasteload allocations.

Ecology must limit coverage general permit to a similar category of discharges. Industrial treatment plant discharges have a different characterization than domestic sewage. They primarily discharge carbon, not nitrogen. Ecology plans to implement nutrient controls for industrial treatment plants through the individual permitting process.

Ecology has not included a termination condition in the draft permit because each Permittee currently has an active individual NPDES permit. Termination of coverage under the draft general permit can only occur if the Permittee removes all discharges from Washington waters of the Salish Sea by redirecting treated effluent to ground (as authorized under a State Waste Discharge Permit) or any other means subject to Ecology's approval.

S2. APPLICATION FOR COVERAGE

A. Obtaining Permit Coverage. In accordance with WAC 173-226-200, each eligible POTW must submit a complete permit application to obtain coverage under the Puget Sound Nutrient

General Permit. Applicants must submit the Notice of Intent (NOI) no later than 90 days after the issuance date of the general permit.

B. How to Apply for Permit Coverage. Each Permittee must submit an electronic NOI through the Water Quality Permitting Portal unless the Permittee has an electronic reporting waiver.

Applicants must satisfy the public notice requirements of WAC [173-226-130\(5\)](#). This permit applies to existing facilities, only. Therefore, no public notice is required for coverage under this permit.

C. When Permit Coverage is Effective. Ecology will respond to the permit applicant in writing. If the NOI is incomplete or more information is needed Ecology will notify the applicant in writing and identify the issues that must be resolved before a decision on permit coverage can be reached.

If Ecology approves the application, permit coverage in an **active status** under the general permit will begin on the date specified in the permit coverage letter.

D. Modification of Permit Coverage. If the Permittee requests a modification in coverage a completed Modification of Coverage form must be submitted to Ecology at least 60 days prior to the needed modification. Examples of when a Permittee needs a coverage modification include any adjustments to an action level or a reduction in monitoring. Changes to treatment processes resulting from optimization do not require a modification of permit coverage. Treatment alterations resulting from a corrective action or facility upgrade may require coverage modification if treatment processes are substantially altered. Ecology will evaluate coverage modifications for these situations on a case-by-case basis. Public notice requirements under WAC 173-226-130(5) must be completed as part of this modification request. SEPA may be required if the modification requested is related to a major process upgrade.

S3. COMPLIANCE WITH STANDARDS

Condition S3 of the permit is covered in this fact sheet under Consideration of Surface Water Quality-Based Limits for Numeric Criteria, above.

S4. REQUIREMENTS FOR WWTPS WITH DOMINANT TIN LOADS

The discharge limits in S4 are described above in *Rationale for Narrative Water Quality-Based Effluent Limitations* and *Consideration of Narrative Water Quality-Based Limits for Numeric Criteria*.

ACTION LEVEL CALCULATION

This draft permit proposes a total inorganic nitrogen action level for each of the permittees listed in Condition S4, which constitute 99% of the current domestic point source anthropogenic load. The action level, AL₀, forms the baseline value representing current TIN

loading and drives treatment optimization requirements. Ecology developed a [calculation tool](#) for AL_0 that uses a non-parametric method called “bootstrapping” to calculate the annual load from facility data that represents a load that would only have a 1% chance of exceeding if the loads are consistent with existing loading. Bootstrapping is a statistical test that uses random sampling with replacement meant to mimic the sampling process (“Bootstrapping(statistics),” 2021). As opposed to parametric methods that make assumptions about an underlying distribution of a data set to determine future observations, the bootstrapping method assumes the original data set represents possible future observations in the absence of changing conditions.

Confidence intervals for simulated means using the bootstrapping method can be derived by first randomly selecting values from the original observation data (with each selected value being returned to the original set for potential reselection) in order to create a new “bootstrapped” sample of observations. The mean of each resampled data set is then determined and those means create a probability distribution. Ecology calculated AL_0 using the 99% upper confidence level (UCL) from the probability distribution of means. Members of the Environmental Caucus expressed a desire for Ecology to use the 95% UCL from the same probability distribution of means for the AL_0 calculation. However, use of the 95% UCL actually results in a 23% chance of at least one exceedance over the permit term. The 99% UCL more accurately represents the discharge condition at each of the qualifying facilities and is sufficient to drive meaningful nutrient reduction progress during the permit term. While Ecology is confident that this 99% UCL bootstrapping calculation represents a 1% chance of exceedance for a given year, it does not take into account inter-annual variability related to cool and wet weather. For this reason, permittees must exceed the action level two consecutive years before triggering the corrective action requirement discussed below. Permittees with a “bubbled” action level will trigger the corrective action requirement when the cumulative annual loads for all applicable plants exceeds the value in draft Condition S4.A. Bubbled action levels sum the individual action levels for each WWTP owned and operated by the same **jurisdiction**. Ecology will evaluate the combined, reported annual TIN loads for each WWTP included in the bubbled action level at the end of each 12 month monitoring period. If the loading from the applicable WWTPs exceeds the bubbled action level, the corrective action requirement applies.

Ecology strived to accurately represent existing discharges with the action level calculation. Where possible Ecology used at least 3 years of data (36 data points) in the AL_0 calculation. More data was used if it was available and representative. TIN loads were calculated using day of flow measurements paired with single sample ammonia and nitrate/nitrite concentrations. Where ammonia and nitrate/nitrite were not measured on the same day, the missing concentration was extrapolated from the most representative measurement. Periodic samples are assumed to represent the month or quarter in which a sample was taken. If there are multiple samples in a period, new data replaces old as best representation for subsequent days in the period. Most Permittees had monthly data available for these individual load calculations. Some Permittees had only quarterly data which required extrapolation to better represent the variability. The representative concentration was paired with the first flow

measurement in the months not sampled to estimate load variation over the course of the quarter.

Ecology verified whether enough data for each facility exists to make a reasonable representation of the unmeasured data by using the shape of the cumulative distribution functions (CDF) as a check. The CDF plot for bootstrapped averages appears as a smooth line if the observations cover the full range of possible results. Bumpy curves or steep slopes in the CDF indicate an insufficient amount of data or data that does not accurately represent the discharge condition. All facilities listed in S4 had a sufficient amount of DMR data for the action level calculation except for Blaine's Lighthouse Point WRF. This facility specific action level is based on a shorter period than other facilities due to COVID related closures which impacted the availability of representative data. See [Appendix E](#) for calculation information related to the data range used for each S4 permittee's AL_o.

This action level calculation serves as Ecology's best representation of each Permittee's existing discharge condition given the DMR data available. Sampling requirements in Condition S6 will increase the sampling density for all Permittees. In some cases, this increased sampling density may result in a better effluent characterization which could impact the estimate of existing loads. Permittees may request an action level reassessment after completing one year of sampling. In order for Ecology to accept this request to reassess the action level, Permittees must show that the overall loading to the facility has not increased by providing an influent BOD₅ load comparison. Ecology cannot reassess the action level if influent loads increased during the first year of the draft general permit. Any recalculated action levels would be implemented through a permit coverage modification (see draft Condition S2.D for more details about the coverage modification).

DRAFT CONDITION S4.C NITROGEN OPTIMIZATION PLAN

The draft permit requires optimization of existing treatment processes as a best management practice (BMP) to stay below the facility specific nutrient action level and to reduce nitrogen to the greatest extent possible during the permit term. Optimization, as required by this permit, is the suite of activities or a single activity that result in improved nitrogen removal at an existing treatment plant, regardless of the treatment type. It does not include activities that result in costly upgrades or large capital infrastructure improvements. Optimization serves as the mechanism to bridge the period between this first permit issuance and compliance with final, numeric WQBELs, which Ecology will calculate after completing the modeling to support the NRP.

For the largest loaders, submittal of the annual Nitrogen Optimization Plan (NOP) via the Annual Report requirement constitutes a portion of the narrative WQBEL for this 5 year permit term as it represents an adaptively managed BMP. All Permittees specified in Special Condition S4 must develop, implement, and maintain a NOP for purposes of maximizing removal of nitrogen. The NOP must be submitted to Ecology via the Annual Report requirement.

Permittees must begin to identify optimization strategies starting upon the effective date of the PSNGP, following receipt of the coverage letter from Ecology with implementation occurring as soon as possible during permit year 1. In the Annual Report, Permittees must document optimization opportunities at their WWTP, implementation process, the success of the implemented strategy compared to expected performance, any necessary refinements to improve performance, and the application of adaptive management. Permittees must use monitoring data collected under this permit in addition to process modeling to quantify and evaluate results. A number of different optimization strategies exist and Ecology understands implementation opportunities will vary across all POTWs that must seek coverage under the propose permit. Ecology expects that the year round quantifiable BMP requirement to optimize treatment will assist Permittees listed in S4 in keeping annual TIN effluent loads as low as possible.

Optimization Approaches

The preliminary draft permit released by Ecology in January 2021 contained different tiers of actions for optimizing biological treatment to remove nitrogen. This permit does not differentiate between the tiers of optimization requirements leaving the Permittee to determine what strategies are best suited for reducing nitrogen with the existing treatment process. The following categories of optimization strategies are meant to help be a guide for Permittees to improve biological nitrogen removal but in no way are they exhaustive. Permittees can implement optimization strategies not listed in this fact sheet provided they document the selection process in the Annual Report. As previously stated, optimization should not result in major capital improvements at each Permittee's WWTP (although, some implementation costs are expected).

Permittees may exclude optimization strategies that exceed a reasonable implementation cost or timeframe. Any impacts resulting in exclusion must be documented in the Annual Report per condition S4.C.1.b. Ecology attempted to collect feedback on what Permittees would evaluate when making decisions about applicable optimization approaches and their financial impact during the preliminary draft stage. No clear response emerged from the comments received on that permit draft. If excluding a viable optimization strategy due to financial reasons, Permittees must provide the anticipated implementation cost and describe the justification for why they cannot cover and/or absorb that cost. Justifications may include immediate impacts to operational, equipment or capital budgets and an explanation of why the jurisdiction cannot make accommodations to cover these costs through future budgeting adjustments. When excluding a strategy due to the implementation timeframe, include documentation that how long procurement and installation will take to occur and any other pertinent information.

EPA's [Case Studies on Implementing Low-Cost Modifications to Improve Nutrient Reduction at Wastewater Treatment Plants](#) (2015) is a resource recommended for optimizing activated sludge plants. The following optimization strategies reflect the document's suggestions for

improving nitrogen removal at WWTPs. Plants that do not use an activated sludge process are encouraged to focus more on influent load reductions and effluent management alternatives.

Process Control Modifications

Process control optimization strategies include the various operational approaches used to control the treatment process and respond to changing operational conditions. Many different factors can affect process performance. Permittees shall consider modifications to the solids retention time, mixed liquor suspended solids concentrations and F/M ratios. Improved flow equalization, changes to internal recycle rates, side stream return flow controls, online analyzers (e.g., oxidation reduction potential, DO, etc.), improved process control monitoring, primary sludge fermentation, and sequencing batch reactor cycle modifications are all examples of process control optimization actions. Septage receiving and handling modifications can also be implemented to help regulate influent loads at the WWTP. Many of these process control changes can be made using existing infrastructure helping to keep implementation costs low.

Aeration Modifications

Removing nitrogen biologically requires maintaining specific biological populations that have variable needs for oxic (nitrification) and anoxic (denitrification) conditions. Modification of aeration controls through diffuser improvement, DO probe settings, blower motor variable frequency drive settings, and improved air valve actuation settings are examples of optimization through aeration modifications. Mixer modifications to prevent entraining oxygen in an anoxic zone are another example of this optimization strategy.

Configuration Changes

Altering the way wastewater flows through the treatment plant is a physical way to alter a process configuration, which has the potential to reduce nitrogen. These can include adding baffles for creation of anoxic zones, step feeding influent to encourage consistent F/M ratios, additional recycle piping, use of gates or channel changes, or plug flow conversions to create aerobic and anoxic zones. These can be similar to process control modifications; however, configuration changes can be costly and generally require investment in some new infrastructure or equipment. Therefore, Ecology recommends investigation of configuration changes only if the POTW can implement the optimization strategy with existing infrastructure and minimal procurement of equipment.

Chemical Addition

Chemical addition may be necessary to help drive biological nitrification and denitrification. Alkalinity and carbon are the two parameters that can improve a treatment plant's ability to remove nitrogen. Alkalinity feeds can help improve nitrification if background alkalinity concentrations are low and unable to maintain the pH range necessary for biological nitrification. Supplemental carbon may be necessary to drive denitrification if there is an

insufficient carbon source from influent soluble BOD. Chemical feed systems to regulate delivery of supplemental alkalinity or carbon will require an investment from the Permittee as will the purchase of the chemicals themselves. Ecology recommends chemical addition as an optimization strategy only after working to improve other treatment process performance through control and configuration strategies. This strategy is also most applicable to POTWs originally designed for nitrification/denitrification where operators cannot achieve adequate treatment efficiency.

Effluent Management

Changes in effluent management to reduce nitrogen loads to the water environment can occur several different ways. Primarily, this approach redirects effluent from reaching surface water through increasing the volume of reclaimed water produced (if previously permitted for reclaimed water production), discharge to a polishing wetland, or other alternate disposal methods where the effluent can be discharged to ground. Groundwater Quality Standards in Chapter 173-216 WAC include criteria for total nitrogen (TN) at 10 mg/L. Most Permittees subject to draft permit condition S4 discharge well above 10 mg/L TN. This criteria may preclude use of discharge to ground as an optimization strategy; however, it shall be considered as part of the Nutrient Reduction Evaluation. Ecology recommends effluent management strategies apply to Permittees that already produce reclaimed water or have approved alternate disposal methods due to the complexity and implementation costs that accompany this approach.

Nitrogen Optimization Report Requirements

Ecology understands that there may be many different approaches to optimization and does not want Permittees to focus reporting on daily process microadjustments. Rather, the Annual Report documenting optimization must focus on the one or two primary strategies implemented at the treatment plant over the 12 month reporting period. The adaptive management process begins with the requirement to conduct an existing treatment performance assessment after permit coverage notification. Submittal of the electronic Annual Report (Special Condition S9) through the WQWebPortal satisfies the Nitrogen Optimization Plan requirement. See Appendix C in the draft permit for Annual Report Questions that document optimization for dominant loaders.

Draft Condition S4.C.1 Treatment Process Performance Assessment

First, Permittees must conduct a process evaluation to establish current treatment performance and the existing TIN removal rates. This process evaluation may be conducted through process modeling or an equivalent analysis. This initial assessment is required to help Permittees evaluate viable optimization approaches at the WWTP prior to implementation. Initially, each Permittee must also develop an optimization goal and determine the three most viable optimization strategies capable of achieving the goal. The goal may simply be to stay under the action level. Other goal examples include meeting a specific TIN concentration target

or improving treatment process efficiencies. After initial selection, Permittees must maintain a prioritized list of optimization strategies at all times and update that list as part of the Annual Report requirement.

Prior to implementing the preferred optimization strategy, Permittees must develop an anticipated performance metric. Ecology suggests using % removal for this performance metric; however, Permittees may propose a different criteria and detail the approach in the Annual Report. The performance metric must provide the Permittee with the ability to compare expected vs. actual treatment improvement from optimization.

Draft Condition S4.C.2 Optimization Implementation

Permittees must also document how they implemented the preferred optimization strategy including costs, the time required for full implementation, the start date of the preferred strategy, unanticipated challenges, and impacts to the overall treatment performance as a result of any process changes.

Permittees will document the annual average TIN concentrations and loads from the reporting period in the Annual Report in addition to the TIN removal rate observed (or other performance metric if identified by the Permittee). The observed results must be compared to the performance metric developed in condition S4.C.1.c. These results inform the adaptive management required at the WWTP. While permit required monitoring must be used to track optimization progress, Permittees may need to use internal process control sampling locations in addition to influent and effluent monitoring. Laboratory accreditation is not required for process control monitoring and should not be reported on DMRs.

The facility specific action level represents the current discharge condition at each of the treatment plants. Ecology intends for the implemented optimization strategies to help each Permittee stay below their facility specific action level. This prevents additional nitrogen loading into Puget Sound during the period while Ecology completes modeling necessary to determine numeric WQBELs. Permittees can maintain the optimization strategy implemented provided they met the self-identified performance metric and stayed below the action level. Adaptive management is required if Permittee stayed below the action level but did not meet the performance metric. In this case, the Permittee can refine the implementation of the selected alternative or, they can elect to pursue a different optimization strategy for the next 12-month period. Exceeding the facility specific action level requires the Permittee to execute a corrective action to reduce the effluent nutrient load per S4.D.

Draft Condition S4.C.3 Influent Nitrogen Reduction Measures/Source Control

In addition to identifying opportunities to reduce effluent TIN loads through optimization, Permittees must also develop a program to reduce influent TIN loads. Permittees must review non-residential sources of nitrogen, septage handling practices (if applicable) and any opportunities for pre-treatment. Elimination of RV and boat pump out services are not applicable to this condition. However, Permittees may investigate changes to wastestream

management practices related to RV and boat pump out services. Given that the primary source of nitrogen in domestic wastewater is from urine, influent reduction opportunities may be limited. Therefore, in addition to reviewing pre-treatment opportunities, Permittees must also begin to identify different approaches for reducing TIN from new dense residential development and commercial buildings.

Draft Condition S4.D Action Level Exceedance Corrective Actions

The existing **303(d)** listings for DO throughout Puget Sound requires Ecology to prevent additional pollutant loadings that create the impairment. An action level compliance assessment occurs at every 12-month interval following the permit effective date. Ecology will use the monitoring data required under this permit and submitted via WQWebDMR to determine whether the Permittee exceeded the action level over the previous 12-month period. Permittees must also document action level exceedances in their Annual Report. Following documentation of the first exceedance, Permittees must begin to develop a strategy for reducing their effluent load by 10%. The most recent documented annual average load must be the basis for the 10% reduction. This level of reduction is consistent with the need to offset increased loads due to population growth while Ecology works to determine final effluent limits for the regional permittees. For Permittees with “bubbled” action levels, Ecology will evaluate exceedances using the cumulative TIN load totals from each WWTP owned and operated by the Permittee. If a corrective action is triggered for a jurisdiction with a bubbled action level, the Permittee must apply the 10% reduction to the bubbled total.

Strategies considered for reducing loading must include increasing production volumes of reclaimed water (if applicable to the facility), implementing side stream treatment for a portion of return flows from solids treatment, reducing influent nitrogen loads, alternative effluent disposal options and any other intermediate treatment alternative which results in decreased nitrogen loads into Puget Sound prior to major facility upgrades. Water quality offsets under Chapter WAC 173-201A-450 cannot be used for this purpose as final, numeric WQBELs have not been established.

The proposed approach to reduce effluent loads will be due in conjunction with the next annual report, 12 months after self-reporting the first action level exceedance. Permittees must submit a proposal to reduce the TIN load that addresses how to meet this 10% reduction requirement within the 1st and 2nd permit cycles (5-10 years). This proposal may need meet requirements for an engineering report (Chapter 173-240-040 WAC). An engineering report would be required for side stream treatment design and other major treatment process additions. An engineering report is not required for solutions that have been previously approved by Ecology but not yet constructed, influent load reduction, increased reclaimed water production (for a previously identified beneficial use), or other alternatives that do not result in a major process addition or change.

A second, consecutive action level exceedance requires the Permittee to immediately begin implementation of the proposal to reduce effluent loading by 10% upon Ecology’s approval. The two consecutive year exceedance requirement results from acknowledgement that the

action level calculation does not include a provision to account for inter annual weather variability. When a second exceedance falls in the last year of the permit, the Permittee must still implement the preferred alternative as this requirement will bridge the period between this first permit cycle and the end of a compliance schedule for meeting final WQBELs, once established. An update to the WWTP's Operation and Maintenance manual must be provided to Ecology no later than 30 days after implementation so that facility records are kept current. Non-consecutive exceedances do not require immediate corrective action. Rather, Permittees must submit the plan for reduction by the date specified in S4.D and then implemented following a third action level exceedance during the permit term.

An action level exceedance does not constitute a permit violation provided the Permittee follows through with the corrective action requirements and satisfies the other narrative effluent limits listed in Special Condition S4.A in the draft permit, including the Annual Report requirement documenting optimization.

Annual Reporting

Ecology has developed an electronic annual report to standardize the optimization reporting requirements for Permittees. The Annual Report submittal will describe the well-documented approach the Permittee used to select and evaluate the effectiveness of the optimization strategy including a comparison of actual vs. anticipated results and the adaptive management necessary to stay below the WWTP's action level. Questions for Permittees can be found in Appendix C of the permit. Ecology encourages Permittees to begin the Annual Report several weeks ahead of the March 31st submittal date to allow plenty of time for adequate completion.

Draft Condition S4.E Nutrient Reduction Evaluation

Ecology considers planning for meeting future water quality based effluent limitations to be a BMP and part of the narrative effluent limit for this permit cycle. Compliance with this narrative limit requires submittal of the Nutrient Reduction Evaluation (NRE) by the date listed in the draft permit. LOTT does not need to complete the NRE requirement described in Condition S4.E. This treatment plant already has an effluent limit below 3 mg/L TIN in their individual NPDES permit for TIN during the critical season of April through October. In addition, the Budd Inlet TMDL, scheduled for completion in early 2022, will require compliance with the individual facility wasteload allocation upon EPA approval. No additional planning for LOTT WWTP is required at this time.

The treatment infrastructure improvements necessary to achieve final effluent limits capable of protecting water quality will require a stepwise process over several 5 year permit cycles. This is due to the time required for alternative selection, engineering design, and construction of new treatment processes in addition to financial planning. Completion of a planning exercise during this first permit term is necessary to minimize the time required to ultimately achieve final numeric effluent limits once developed.

Ecology intends to provide flexibility and incentives to address nutrients comprehensively on a watershed scale. Water quality trading as allowed under Chapter 173-201A-450 WAC will likely be part of the final solution upon establishment of numeric WQBELs for each Permittee. The NRE may include a water quality offset framework as part of the required alternatives analysis. However, Ecology must approve any formal water quality-trading framework in consultation with Tribes who have an interest in its development.

As proposed with the January 2021 preliminary draft, the NRE must consider different final treatment concentration targets for TIN. Ecology expects final numeric effluent limits for domestic WWTPs in the region to be a mix of technology and water quality based limits. Therefore, all plants subject to permit condition S4 must consider two treatment thresholds in the NRE. Unlike the preliminary draft, Ecology is not providing the upper level effluent limitation for this analysis. Permittees must determine the upper limit, analogous to a technology based effluent limitation, through the identification of AKART for nitrogen removal at their WWTP. Permittees must also assess treatment alternatives capable of meeting 3 mg/L TIN (or the equivalent load) on average, annually and seasonally, which represent possible future water quality based-effluent limits.

This planning document also requires an assessment of current treatment technology including site specific flows, loads, and population growth projections within the sewer service area for a 20 year planning period. Site-specific constraints and other treatment implementation challenges must be part of the analysis. Ecology will review and approve this plan. This report must be prepared for each WWTP specified under draft permit special condition S4. Entities that own and operate more than one WWTP may submit one comprehensive plan to satisfy this permit condition. Permittees that would like to work together may also submit a combined report that satisfies all requirements in draft condition S4.E.

The current body of knowledge regarding nutrient treatment technologies continues to evolve as researchers develop and study new microbial populations and advanced treatment processes. Section G1-5.4 of the [Criteria for Sewage Works Design](#) (Ecology, 2019) contains information for permittees when selecting a new or developmental treatment technology as a preferred treatment alternative. Permittees interested in evaluating a non-traditional treatment approach shall work closely with the Ecology permit manager for their individual permit early on in the scoping phase to ensure development of an appropriate pilot study that satisfies the Agency's needs for future plan approval. Ecology recommends that permittees also work with any interested third parties during scoping, project development and pilot testing. This increases situational awareness and provides an avenue for information sharing, which may help decrease risk when exploring efficacy of a new or developmental technology. Ecology encourages creative approaches to reducing nutrient loads in Puget Sound and understands the Agency will need to support any permittee that elects to pursue innovative solutions that have not yet seen full-scale implementation in the state.

Treatment Technology Analysis

First, the Permittee must conduct an AKART analysis to determine a reasonable level of treatment for nitrogen removal. The term “reasonable”, in the context of AKART directly relates to affordability of an engineered treatment solution. AKART reflects the level of treatment most suited to a technology based effluent limitation.

As discussed earlier in this fact sheet, Ecology’s AKART approach for nutrient removal, specifically nitrogen removal for the Puget Sound area, continues to evolve. All treatment plants must meet AKART under 90.48.010 RCW. Secondary standards in Chapter 173-221 WAC do not include nutrient requirements. All plants when initially designed and constructed met the secondary treatment regulation; however, a site-specific evaluation is now required in light of the existing DO impairments related to nutrient over enrichment in Puget Sound.

In addition to making an AKART determination, which will represent a technology based approach for controlling nitrogen, the NRE must evaluate treatment alternatives for meeting the lower limit of technology for nitrogen removal both year round and seasonally. This lower limit of technology, which Ecology estimates to be approximately 3 mg/L TIN, reflects modeling scenarios and represents a concentration Permittees may expect if required to meet a WQBEL. Early Year 1 modeling results currently in publication indicate that some treatment plants will need to meet this level of treatment to protect the receiving water. Alternative effluent management options (e.g., disposal to ground, identification of reclaimed water beneficial uses) can be considered for this alternative. As with the AKART determination, this treatment assessment must include an economic evaluation for each technology considered.

Economic Evaluation

In order to satisfy this permit condition, Permittees must develop capital, operation and maintenance costs, and net present value estimates using real discount rates in the most recent [Appendix C of The White House’s Office of Management and Budget Circular No. A-94](#) for each treatment alternative evaluated for meeting AKART and 3 mg/L TIN (or the equivalent load) on average both annually and seasonally. A cost per pound of nitrogen removed for each treatment technology is also required. The [Permit Writers Manual](#) (2018) contains limited guidance on how to conduct an economic evaluation for deriving effluent limits when applying AKART in Chapter 4, Section 3.12. Permit conditions to develop associated costs for proposed treatment alternatives reflect this guidance.

Permittees must also provide details regarding the basis for the current utility rate structure used to support the existing level of wastewater treatment provided to the service area. In the review of the current rate structure, Permittees need to indicate how allocations of direct costs for operation and capital expenditures are recovered from payment of utility fees, how often the rate structure is reviewed to ensure financial solvency, and the last time wastewater rates were either increased or decreased and the impetus for that change. In addition, impacts to the current rate structure for each treatment technology evaluated must be provided.

Environmental Justice Review

Ensuring environmental justice (EJ) is a priority in Washington State ([SB5141 Final Bill Report](#)) and Ecology is committed to making decisions that do not place disproportionate burdens on **overburdened communities** and vulnerable populations. Permittees must conduct a demographic analysis using the best available population data (such as US Census data, [EPA's EJSCREEN](#), or [DOH's WTN](#)) within their sewer service area to identify communities color, low income populations, Tribes, and indigenous populations. And, after this analysis, Permittees must conduct an affordability assessment to identify whether wastewater utility rate increases would disproportionately impact populations with environmental justice considerations. Ecology recommends using [EPA's Financial Capability Assessment for Clean Water Act Obligations](#) (2021) when looking at options for assessing financial capabilities to implement requirements under the Clean Water Act.

Opportunities to set alternative wastewater rates must also be considered as part of the planning requirement in the draft permit. Permittees must propose how an alternative rate structure can be used to prevent the low-income communities identified in the initial screening from being adversely affected by rate changes. This can include an evaluation of a tiered rate structure to offset adverse effects to the lowest income populations within the sewer service area or other innovative rate structure measures (e.g., fixed vs. variable charges, efficiency oriented rate design, or usage based rates) that ensure affordability when adopting a new rate structure to support treatment upgrades. Identification of overburdened communities and barriers to affordability do not absolve jurisdictions from upgrading treatment processes to meet water quality standards. Jurisdictions must develop a solution that accommodates the need to protect the receiving water while also providing a level of service to all residents within their community. Lastly, the EJ Review must include any positive community effects that may be the result of treatment improvements identified as the preferred alternatives; these may include positive impacts to fishing and harvesting through preservation of Tribal Treaty rights, enhanced opportunities for recreation, and other improvements that may result from decreased nitrogen loads into Puget Sound.

S5. REQUIREMENTS FOR WWTPS WITH SMALL TIN LOADS

The discharge limits in S5 are described above in Rationale for Narrative Water Quality-Based Effluent Limitations and Consideration of Narrative Water Quality-Based Limits for Numeric Criteria.

Condition S5 in the draft permit pertains only the WWTPs that constitute the minority of the domestic point source nutrient load to Puget Sound. The treatment plants that are in this category are generally smaller than the largest loaders and/or have more advanced treatment in place which drives down their effluent nutrient load.

Ecology received comments on the preliminary draft permit regarding revising requirements for these WWTPs. As a result, Ecology reconsidered the approach for these plants. While the

narrative limit approach is the same for these facilities, the BMPs which constitute a narrative water quality based effluent limit under 40 CFR 122.44(k) are slightly different. Overall, Ecology found that these plants have limited capacity to implement the same BMPs as the dominant loaders. And, given the magnitude of the TIN effluent load in relation to the plants in Condition S4, Ecology determined that the requirements in the draft permit for plants in Condition S5 could be implemented at a different pace while making incremental progress in TIN load reductions.

MONITORING

Permittees subject to requirements under S5 have a monitoring schedule listed in S6.B that more accurately reflects the size of plants in this category. Monitoring frequency is limited to 1-2 times per month, depending on the parameter. Compliance with the monitoring portion of the narrative limit requires timely submittal of each discharge monitoring report.

NUTRIENT OPTIMIZATION PLAN

Permittees subject to requirements under S5 must submit the once per permit cycle Nitrogen Optimization Plan to Ecology through the electronic report requirement in S9.D by March 31, 2026. Compliance with this narrative limit requires timely submittal of a complete report. Ecology encourages Permittees to begin the electronic optimization reporting several weeks ahead of the March 31st submittal date to allow plenty of time for adequate completion. See the [Optimization Approaches](#) section under S4 of this fact sheet for suggestions of different optimization strategies available for Permittees. Permittees may work together to satisfy this requirement; however, each Permittee must complete the one-time report documenting individual facility progress through Ecology's WQWebPortal.

Action levels are not part of the narrative effluent limit for Permittees in Condition S5; therefore, there are no corrective actions for this group of Permittees. As a group, they constitute less than 1% of the cumulative domestic point source TIN load into Puget Sound. Permittees must still review their existing treatment performance, select a suite of optimization strategies for their facility, set a performance goal, implement the strategy and evaluate the implementation and document any adaptive management used to refine implementation.

AKART ANALYSIS

Permittees subject to draft permit condition S5 must complete an engineering analysis to determine what constitutes all known and reasonable treatment (AKART) for nitrogen removal at their treatment facility. Compliance with this narrative limit requires submittal of the AKART analysis by the date listed in the draft permit. Permittees may elect to complete this planning task together or separately. If electing to work together, one document may be submitted by the date listed in the permit. Also, a jointly developed document must address AKART treatment alternatives for each type of treatment plant owned and operated by Permittees working together to satisfy this permit condition.

Each of these treatment plants has an approved engineering report for their existing level of treatment, which currently meets secondary treatment requirements under Chapter 173-221 WAC. Ecology's [Permit Writer's Manual](#) (2018) states that AKART is "a technology based approach to limiting pollutants from wastewater discharges which requires an engineering judgement and an economic judgement."

As previously stated, Ecology expects that domestic point sources subject to coverage under this permit will be required to meet a range of final effluent TIN concentrations. While some S5 permittees may need to meet a stringent effluent concentration to address a localized impact directly associated with a specific discharge most will need to implement a less rigorous treatment technology that still goes beyond secondary requirements listed in Chapter 173-221 WAC. At this time, Ecology does not know which S5 Permittees will have to meet the lower effluent limit, which is why this grouping will be held to an AKART analysis in the draft permit, only.

This AKART analysis must include a review of current treatment technologies at the WWTP, including influent volumes and regional growth trends for the next 20 years. Alternatives for reducing effluent TIN loads must be assessed as part of this analysis. Ecology has not provided an effluent treatment target because each discharger must make the determination regarding what constitutes a 'reasonable' level of treatment for nitrogen removal.

Permittees may use elements from a previously approved planning document to satisfy this permit condition. A technical memo that references applicable sections of a previously approved document and also provides the other required plan elements may be submitted to Ecology in this instance. See the [Environmental Justice Review](#) section in this fact sheet for a description of how to meet the EJ requirements for the AKART Analysis.

S6. MONITORING REQUIREMENTS

The monitoring approach outlined in S6 is consistent with the monitoring, recording, and reporting requirements of WAC 173-220-210 and 40 CFR 122.41 and includes consideration of the certainty, risk, cost, and the objectives of the permit. Certainty provides a level of confidence that the data are representative of the pollutants in the discharge. The risk is an assessment of the environmental impacts of pollutants. The monitoring cost considers all associated monitoring expenses, such as time to sample, expense of sampling and analysis, any accreditation expenses, training and equipment requirements. The objectives define the purpose of the sampling which are to track optimization progress and better quantify total inorganic nitrogen (TIN) loads to Puget Sound.

The monitoring frequency established in this permit is consistent with WAC 173-220-210(1)(b) and 40 CFR § 122.48(b). Ecology set sampling frequencies to characterize the nature of the discharge reasonably using recommendations from the Advisory Committee convened in March 2020. Sampling frequencies based on facility size have changed from what Ecology proposed in the preliminary draft. Ecology reduced the number of monitoring categories from three to two

and reduced the required sampling based on feedback from commenters. The revised monitoring schedules will adequately characterize the discharge from both categories of WWTPs covered by the draft permit.

WASTEWATER SAMPLING REQUIREMENTS

Conditions S6.A. and S6.B. requires representative sampling of influent and effluent and authorizes sampling at locations currently defined in the permittee's individual NPDES permit to satisfy this requirement. The frequency of the analysis is broken down into different categories based on plant's size. A primary factor influencing this facility size based monitoring approach were the recommendations from the PSNGP Advisory Committee. The monitoring requirements in the draft permit gives Ecology the ability to assess the characteristics of the facility's effluent and the effectiveness of select nutrient reduction activities identified in the Nutrient Optimization Plan. If the permittee does not have an effluent flow meter, report flows following the same method used for individual permit reporting.

In addition to volumetric flow so that each Permittee can calculate loading, the draft permit contains requirements for influent and effluent monitoring of five core parameters. These include: 5-day carbonaceous biochemical oxygen demand (CBOD₅), total ammonia, nitrate-nitrite, total Kjeldahl nitrogen (TKN) and total organic carbon.

CBOD₅, a subset of BOD₅, measures the amount of dissolved oxygen required for biological oxidation of carbon compounds in a wastewater sample. Unlike BOD₅, the CBOD₅ analysis excludes the oxygen demand for nitrogen species and is more appropriate where plants have an incomplete conversion of ammonia to nitrate. When coupled with the BOD₅ monitoring requirement in permittee's individual NPDES permits, this parameter provides a more complete picture of the treatment performance and carbon removal. Permittees can use BOD₅ and CBOD₅ to track operation efficiencies by calculating percent removal using influent and effluent concentrations. This parameter can be used for optimization reporting and in future SSM scenarios.

Total ammonia the sum of ammonia (NH₃) and ammonium (NH₄⁺) is the most common form of inorganic nitrogen in raw domestic wastewater. Raw domestic wastewater predominately contains ammonia due to the presence of urine. Most treatment plants oxidize ammonia into nitrate through the addition of oxygen.

Nitrate plus Nitrite when added to total ammonia yields total inorganic nitrogen (TIN), the parameter subject to regulation in the draft permit. The treatment process oxidizes inorganic nitrogen from ammonia to nitrite and nitrate, and reduces inorganic nitrogen from nitrate to nitrite, ammonia, or nitrogen gas. The treatment system biota converts inorganic nitrogen into organic nitrogen. Settled solids retain the biota in the treatment system. Wasting sludge removes settled solids with organic nitrogen from the treatment system. TIN in the effluent represents readily available nutrient that the treatment system has removed. Very little nitrate + nitrite is found in wastewater influent which is why the draft permit proposes a reduced

influent monitoring frequency. Plants must use influent and effluent TIN concentrations to help support optimization and influent source reduction. Cumulative TIN loading must also be calculated on a running monthly basis for all permittees. Dominant loaders must use this cumulative TIN load as part of the annual action level assessment in the Nitrogen Optimization Plan requirement (See draft Condition S4.C).

Total Kjeldahl Nitrogen (TKN) is an important parameter for understating nitrification efficiency and provides Permittees with the ability to evaluate the biological treatment system. Comprised of ammonia plus total **organic nitrogen**, TKN allows the amount of organic nitrogen in a wastewater sample to be quantified. Generally, the secondary treatment process converts most of the dissolved organic nitrogen to ammonia where it is available to the biota of the treatment system. Settling removes most of the particulate organic carbon. This parameter is also valuable to Ecology for use in SSM scenarios as little to no organic nitrogen data exists for most permittees. Ecology proposes infrequent (1/month) influent and effluent TKN monitoring for all permittees in the draft permit.

Total organic carbon (TOC) provides Ecology with the ability to quantify the amount of organic, carbon containing pollution discharged from each WWTP. The Environmental Assessment Program has identified carbon as a secondary nutrient driving eutrophication in the Salish Sea. Currently, Ecology has no data on TOC from the domestic WWTPs proposed for coverage under the draft permit. Ecology intends this once per month effluent monitoring to supplement model inputs and to develop correlations with BOD₅/CBOD₅. SSM scenarios utilize BOD as a surrogate for available carbon. Measurements of TOC will help to refine the relationship between BOD/CBOD and available carbon.

ANALYTICAL METHODS AND QUANTITATION LEVELS

Historically, the method detection limit (MDL) was used to determine compliance as all data at or above the MDL were considered adequate for assessing compliance and supporting environmental actions. The MDL, however, is the level at which a chemical's presence or absence can be detected, and provided limited information with regard to actual concentration. Ecology uses the term "quantitation level" as equivalent to the term "minimum level of quantitation (ML)" which is used by EPA. The ML is defined by EPA as the lowest concentration of an analyte that can be measured with a defined level of confidence. This may also be called the reporting level by some laboratories. Based on Ecology's *Permit Writers Manual* (2018), the draft PSNGP defines the quantitation level as the lowest level at which the entire analytical system must give a recognizable signal and acceptable calibration point for the analyte. It is equivalent to the concentration of the lowest calibration standard, assuming that all method-specified sample, weights, volumes, and clean up procedures have been employed.

All NPDES permits require that EPA approved analytical procedures listed in 40 C.F.R. § 136 be used for permit limit compliance sampling and analysis. Permittees must also comply with the NPDES *Use of Sufficiently Sensitive Test methods for Permit application and Reporting Rule* (Federal Register 49001). This requirement mandates that when an EPA-approved method exists, the most sensitive method must be used when quantifying the pollutant in a discharge.

The draft permit requires specific analytical methods and establishes quantitation levels, consistent with Ecology's *Permit Writer's Manual*. If an alternate analytical method from 40 CFR § 136 is sufficient to produce measurable results from the sample, the Permittee may use that method for analysis. If a facility uses a contract laboratory to monitor wastewater, it must ensure that the laboratory uses the method and meets or exceeds the method detection levels required by the permit. The permit describes what to do in certain situations when the laboratory encounters matrix effects. When a facility uses an alternative method as allowed by the permit, it must report the test method and quantitation level (QL) on the discharge monitoring report.

Condition S6.C requires documentation of both influent and effluent sampling to track nutrient loads entering Washington waters of the Salish Sea and quantify results of optimization. The draft PSNGP specifies routine sampling and analysis requirements to provide Ecology with continued, representative information on the pollutants of concern in the domestic wastewater discharges.

Where the monitoring requirements of the draft permit overlap with the monitoring requirements in the individual permit, the same analytical result may be applied to both permits if the Permittee elects to use the influent and effluent monitoring locations identified in the individual permit.

Condition S6.D requires the Permittees to maintain flow measurement calibration at the frequency established by the manufacturer. Permittees must maintain calibration to ensure effluent loading nutrient load calculations are as accurate as possible.

Condition S6. E. Ecology requires facility to use a laboratory registered or accredited under provision of Chapter 173-50 WAC, Accreditation of Environmental Parameters, to prepare all monitoring data.

The 2007 Methods Update Rule (MUR) provided some flexibility to modify EPA approved method listed in 40 CFR § 136.6. This portion of the rule describes potentially allowable method modifications and requirements that analysts need to meet to use methods that incorporate some of these modifications for NPDES compliance monitoring without prior EPA approval. EPA no longer accepts applications for approval of methods that fall within the flexibilities promulgated with the 40 CFR 136.6 rule revision. According to EPA, "any method that relies on the same underlying chemistry and determinative techniques as other methods approved at 40 CFR § 136 for measurement of a given parameters is acceptable for use in NDPEs compliance monitoring provided that the requirements for establishing equivalent performance documentation specified at 40 C.F.R. § 136.6 are met." Often these are referred to as EPA-Equivalent methods. Permittees must receive accreditation for these EPA equivalent methods in order to use them for monitoring and reporting required by this permit. Use of these methods for internal process control information does not require accreditation.

Condition S6.E allows for the Permittee to request a reduction of the sampling frequency after (12) months of monitoring. Permittees must submit a written request to Ecology outlining

which monitoring parameters they propose to reduce and the basis for that reduction. Ecology will look at the DMR data submitted from the beginning of the permit term to the data of the request. Ecology will grant the request only if the DMR data appear representative, consistent, and the Permittee has demonstrated that the distribution of concentrations will not change with a lower sampling frequency. Parameters with highly variable results will not be subject for reduction. If granted, Ecology will address the Permittee's monitoring change through a coverage modification rather than modifying the permit. Permittees must follow public notice requirements described in S2.D at least 60 days prior to the intended reduction effective date.

S7. DISCHARGES TO 303(D) OR TMDL WATERBODIES

The basis for the non-numeric water quality based effluent limitation approach for all Permittees is covered under *Authority to Include Non-Numeric Water Quality Based Limits*.

If EPA approves an applicable Total Maximum Daily Load (TMDL) for WWTPs owned and operated by a Permittee covered by the general permit, Ecology will address any permit requirements related to the approved TMDL in the Permittee's individual permit or through a permit modification.

S8. SOLID AND LIQUID WASTE DISPOSAL

This section is intended to ensure that handling and disposal of solid or liquid wastes do not result in a violation of applicable water quality regulations (40 CFR 122.44(k)(2), 40 CFR 125.3(g), and RCW 90.48.080., and WAC 173-216-110(1)(f)).

This permit does not require the development of a solid waste control plan nor does it authorize discharge of leachate from solid waste material.

S9. REPORTING AND RECORDKEEPING REQUIREMENTS

The reporting and recordkeeping requirements of Special Conditions S9 are based on Ecology's authority to specify any appropriate reporting and recordkeeping requirements to prevent and control waste discharges. Reporting of monitoring results are specified in 40 CFR 122.44(i)(3 and 4) and WAC 173-226-090(3). Discharge Monitoring Reports must be submitted to Ecology even if there was no discharge. Recordkeeping requirements in the draft permit are specified in 40 CFR 122.41(j)(2) and WAC 173-220-210(2)(b). The requirements of Condition S9 will assure that Ecology records are maintained and demonstrate compliance with sampling requirements by the facility.

DRAFT CONDITION S9.C ANNUAL REPORT FOR DOMINANT LOADERS

Ecology proposes Permittees subject to condition S4 submit an Annual Report documenting optimization and adaptive management for the 2022-2027 Permit term, which is a report for

the previous calendar year to be submitted by March 31, annually. The first year Annual Report due by March 31, 2023 will cover the period from January 1, 2022 – December 31, 2022. Submittal of the Annual Report will occur through Ecology’s [WQWebPortal](#). Permittees will report on optimization strategies, treatment performance assessments and adaptive management implemented at the WWTP during each reporting period. Questions for the Annual Report pertaining to dominant loaders will document the Nitrogen Optimization Plan requirements and can be found in Appendix C of the draft permit.

DRAFT CONDITION S9.D SINGLE REPORT FOR SMALL LOADERS

Ecology proposes Permittees subject to condition S5 submit a single report documenting optimization and adaptive management for the 2022-2027 Permit term. This Report due by March 31, 2026 will cover the period from January 1, 2022 – December 31, 2025. Submittal of the Report will occur through Ecology’s [WQWebPortal](#). Permittees will report on optimization strategies, treatment performance assessments and adaptive management implemented at the WWTP during each reporting period. Draft questions for the Single Report pertaining to smallest loaders will document the Nitrogen Optimization Plan requirements and can be found in Appendix D of the draft permit.

S10. PERMIT FEES

RCW 90.48.465 requires Ecology to recover the cost of the water quality permit program. Wastewater fees are established through a rule development process that includes the input of stakeholders, interested parties, and an advisory committee and includes an outreach process. Any new fee proposal will provide public comment opportunity in amending the existing fee regulation (Chapter 173-224 WAC).

GENERAL CONDITIONS

General Conditions are based directly on state and federal law and regulations and have been standardized for all NPDES permits issued by Ecology.

CONDITION G1 requires discharges and activities authorized by the draft permit to be consistent with the terms and conditions of the permit in accordance with 40 CFR 122.41.

CONDITION G2 requires responsible officials or their designated representatives to sign submittals to Ecology in accordance with 40 CFR 122.22, 40 CFR 122.22(d), WAC 173-220-210(3)(b), and WAC 173-220-040(5).

CONDITION G3 requires the Permittee to allow Ecology to access the facility and conduct inspections of the facility and records related to the permit in accordance with 40 CFR 122.41(i), RCW 90.48.090, and WAC 173-220-150(1)(e).

CONDITION G4 identifies conditions that may result in modifying or revoking the general permit in accordance with 40 CFR 122.62, 40 CFR 124.5, and WAC 173-226-230.

CONDITION G5 identifies conditions for revoking coverage under the general permit in accordance with 40 CFR 122.62, 40 CFR 124.5, WAC 173-226-240, WAC 173-220-150(1)(d), and WAC 173-220-190.

CONDITION G6 requires the Permittee to notify Ecology when facility changes may require modification or revocation of permit coverage in accordance with 40 CFR 122.62(a), 40 CFR 122.41(l), and WAC 173-220-150(1)(b).

CONDITION G7 prohibits the Permittee from using the permit as a basis for violating any laws, statutes or regulations in accordance with 40 CFR 122.5(c).

CONDITION G8 requires the Permittee to reapply for coverage 180 days prior to the expiration date of this general permit in accordance with 40 CFR 122.21(d), 40 CFR 122.41(b), and WAC 183-220-180(2).

CONDITION G9 identifies the requirements for transfer of permit coverage in accordance with 40 CFR 122.41(l)(3) and WAC 173-220-200. When control or ownership of the facility from which the authorize discharge emanates changes, the new **owner** must obtain permit coverage, either through a transfer of permit coverage per Condition G9, or by applying for the permit per Condition S2.

CONDITION G10 prohibits the reintroduction of removed substances back into the effluent in accordance with 40 CFR 125.3(g), RCW 90.48.010, RCW 90.48.080, WAC 173-220-130, and WAC 173-201A-240.

CONDITION G11 requires Permittees to submit additional information or records to Ecology when necessary in accordance with 40 CFR 122.41(h).

CONDITION G12 incorporates all other requirements of 40 CFR 122.41 and 122.42 by reference.

CONDITION G13 notifies the Permittee that additional monitoring requirements may be established by Ecology in accordance with 40 CFR 122.41(h).

CONDITION G14 describes the penalties for violating permit conditions in accordance with 40 CFR 122.41(a)(2).

CONDITION G15 provides the regulatory context and definition of “**Upset**” in accordance with 40 CFR 122.41(n).

CONDITION G16 specifies that the permit does not convey property rights in accordance with 40 CFR 122.41(g).

CONDITION G17 requires the Permittee to comply with all conditions of the permit in accordance with 40 CFR 122.41(a).

CONDITION G18 requires the Permittee to comply with more stringent toxic effluent standards or prohibitions established under Section 307(a) of the Clean Water Act in accordance with 40 CFR 122.41(a)(1), WAC 173-220-120(5), and WAC 173-201A-240.

CONDITION G19 describes the penalties associated with falsifying or tampering with monitoring devices or methods in accordance with 40 CFR 122.41(j)(5).

CONDITION G20 requires Permittees to report planned changes in accordance with 40 CFR 122.41(l)(1).

CONDITION G21 requires Permittees to report any relevant information omitted from the permit application in accordance with 40 CFR 122.41(l)(8).

CONDITION G22 requires Permittees to report anticipated non-compliances in accordance with 40 CFR 122.41(l)(2).

CONDITION G23 defines appeal options for the terms and conditions of the general permit and of coverage under the permit by an individual discharger in accordance with RCW 43.21B and WAC 173-226-190.

CONDITION G24 invokes severability of permit provisions in accordance with RCW 90.48.904.

CONDITION G25 prohibits *bypass* unless certain conditions exist in accordance with 40 CFR 122.41(m).

PERMIT ISSUANCE PROCEDURES

PERMIT MODIFICATIONS

Ecology may modify the PSNGP to impose numerical limitations, if necessary to meet water quality standards for surface waters based on new information obtained from sources such as effluent monitoring and model scenario results.

Ecology may also modify this permit as a result of new or amended state or federal regulations.

RECOMMENDATION FOR PERMIT ISSUANCE

The draft PSNGP meets all statutory requirements for authorizing a wastewater discharge, including those limitations and conditions believed necessary to protect human health, aquatic life, and the beneficial uses of waters of the State of Washington. Ecology proposes that this permit be issued for five (5) years.

ECONOMIC IMPACT ANALYSIS

In accordance with WAC 173-226-120, Ecology did not prepare an economic impact analysis for the draft general permit as the permit does not propose to directly cover small business.

BIBLIOGRAPHY

Significant agency actions from Ecology’s Water Quality Program prepared after June 12, 2014 must follow requirements in [RCW 34.05.272](#) and categorize all references used during development. A bracketed number indicating the source category follows each individual reference. Document categories are as follows:

1. Peer review is overseen by an independent third party.
2. Review is by staff internal to Department of Ecology.
3. Review is by persons that are external to and selected by the Department of Ecology.
4. Documented open public review process that is not limited to invited organizations or individuals.
5. Federal and state statutes.
6. Court and hearings board decisions.
7. Federal and state administrative rules and regulations
8. Policy and regulatory documents adopted by **local governments**.
9. Data from primary research, monitoring activities, or other sources, but that has not been incorporated as part of documents reviewed under other processes.
10. Records of best professional judgment of Department of Ecology employees or other individuals.
11. Sources of information that do not fit into one of the other categories listed.

REFERENCES FOR TEXT AND APPENDICES

Ahmed, A., G. Pelletier, M. Roberts, and A. Kolosseus. 2014. South Puget Sound Dissolved Oxygen Study, Water Quality Model Calibration and Scenarios. Publication 14-03-004. Washington State Department of Ecology, Olympia.
<https://fortress.wa.gov/ecy/publications/SummaryPages/1403004.html> [2] [3]

Ahmed, A., G. Pelletier, and M. Roberts. 2017. South Puget Sound flushing times and residual flows. *Estuarine, Coastal and Shelf Science* 187: 9–21.
<https://doi.org/10.1016/j.ecss.2016.12.027> [1]

Ahmed, A., C. Figueroa-Kaminsky, J. Gala, T. Mohamedali, G. Pelletier, and S. McCarthy. 2019. Puget Sound Nutrient Source Reduction Project. Volume 1: Model Updates and Bounding Scenarios. Washington State Department of Ecology, Publication 19-03-001.
<https://apps.ecology.wa.gov/publications/SummaryPages/1903001.html> [2] [3]

Ahmed, A., J. Gala, T. Mohamedali, C. Figueroa-Kaminsky, & S. McCarthy. 2021. Draft Technical Memorandum: Puget Sound Nutrient Source Reduction Project Phase II – Optimization Scenarios (Year 1). Washington State Department of Ecology, In Publication. [2] [3]

Albertson, S.L., K. Erickson, J.A. Newton, G. Pelletier, R.A. Reynolds, and M.L. Roberts. 2002. South Puget Sound Water Quality Study, Phase 1. Publication 02-03-021. Washington State Department of Ecology, Olympia.

<https://apps.ecology.wa.gov/publications/SummaryPages/0203021.html> [2]

Bootstrapping(statistics). (2021, May 7). In *Wikipedia*.

[https://en.wikipedia.org/w/index.php?title=Bootstrapping_\(statistics\)&oldid=1021858475](https://en.wikipedia.org/w/index.php?title=Bootstrapping_(statistics)&oldid=1021858475) [11]

Cope, B. 2021. Regulatory Models and Salish Sea Model Development [PowerPoint Slides]. U.S. Environmental Protection Agency.

https://www.ezview.wa.gov/Portals/_1962/Documents/PSNSRP/Cope%20Nutrient%20Workshop%20March%202021.pdf [11]

Council for Regulatory Environmental Modeling (CREM), 2009. Guidance on the Development, Evaluation, and Application of Environmental Models. U.S. Environmental Protection Agency, Council for Regulatory Environmental Modeling. EPA/100/K-09/003.

https://www.epa.gov/sites/production/files/2015-04/documents/cred_guidance_0309.pdf [11]

Khangaonkar, T., W. Long, B. Sackmann, T. Mohamedali, and M. Roberts. 2012 a. Puget Sound Dissolved Oxygen Modeling Study: Development of an Intermediate Scale Water Quality Model. Pacific Northwest National Laboratory, Richland WA. PNNL-20384.

<https://apps.ecology.wa.gov/publications/SummaryPages/1203049.html> [2]

Khangaonkar, T., B. Sackmann, W. Long, T. Mohamedali, and M. Roberts. 2012 b. Simulation of annual biogeochemical cycles of nutrient balance, phytoplankton bloom(s), and DO in Puget Sound using an unstructured grid model. *Ocean Dynamics*, 62(9): 1353-1379. doi: 10.1007/s10236-012-0562-4 [1]

Khangaonkar, T., A. Nugraha, X. Wenwei, W. Long, L. Bianucci, A. Ahmed, T. Mohamedali, & G. Pelletier. 2018. Analysis of Hypoxia and Sensitivity to Nutrient Pollution in Salish Sea. *Journal of Geophysical Research: Oceans*, 123. <https://doi.org/10.1029/2017JC013650> [1]

Khangaonkar, T., A. Nugraha, W. Xu, & K. Balaguru. 2019. Salish Sea response to global climate change, sea level rise, and future nutrient loads. *Journal of Geophysical Research: Oceans*, 124. <https://doi.org/10.1029/2018JC014670> [1]

McCarthy, Sheelagh. 2018. Quality Assurance Project Plan: Salish Sea Model Applications. Washington State Department of Ecology, Publication #18-03-111.

<https://apps.ecology.wa.gov/publications/SummaryPages/1803111.html> [2]

Newton, J. and K. Van Voorhis. 2002. Seasonal Patterns and Controlling Factors of Primary Production in Puget Sound's Central Basin and Possession Sound. Washington State

Department of Ecology, Olympia, WA. Publication No. 02-03-059.

<https://apps.ecology.wa.gov/publications/SummaryPages/0203059.html> [2] [3]

Pelletier, G., L. Bianucci, W. Long, T. Khangaonkar, T. Mohamedali, A. Ahmed, and C. Figueroa-Kaminsky. 2017. Salish Sea Model: Sediment Diagenesis Module. Washington Department of Ecology, Publication #17-03-010.

<https://apps.ecology.wa.gov/publications/SummaryPages/1703010.html> [2]

Roberts, M., J. Bos, and S. Albertson, 2008. South Puget Sound Dissolved Oxygen Study – Interim Data Report. Washington State Department of Ecology, Olympia, WA. Publication No. 08-03-037. <https://apps.ecology.wa.gov/publications/SummaryPages/0803037.html> [2] [3]

Roberts, M., T. Mohamedali, B. Sackmann, T. Khangaonkar, and W. Long. 2014. Puget Sound and the Straits Dissolved Oxygen Assessment Impacts of Current and Future Human Nitrogen Sources and Climate Change through 2070. Publication 14-03-007. Washington State Department of Ecology, Olympia.

<https://apps.ecology.wa.gov/publications/SummaryPages/1403007.html> [2] [3]

S.B.5141, 2021 Biennium, 2021 Regular Session. Washington, 2021.

<http://lawfilesexternal.wa.gov/biennium/2021-22/Pdf/Bill%20Reports/Senate/5141-S2.E%20SBR%20FBR%2021.pdf?q=20210526145758> [5]

Sutherland, D.A., P. MacCready, N. Banas, and L. Smedstad. 2011. A model study of the Salish Sea estuarine circulation. *Journal of Physical Oceanography* 41: 1125–1143. [1]

U.S. Environmental Protection Agency (EPA), 2015. Case Studies on Implementing Low-Cost Modification to Improve Nutrient Reduction at Wastewater Treatment Plant: Draft Version 1.0. U.S. Environmental Protection Agency, Washington, D.C..

https://www.epa.gov/sites/production/files/2015-08/documents/case_studies_on_implementing_low-cost_modification_to_improve_potw_nutrient_reduction-combined_508_-_august.pdf [11]

U.S. Environmental Protection Agency (EPA). 2004. Memorandum – Annual Permit Limits for Nitrogen and Phosphorus for Permits Designed to Protect Chesapeake Bay and its tidal tributaries from Excess Nutrient Loading under the National Pollutant Discharge Elimination System. USEPA Office of Wastewater Management.

https://www3.epa.gov/npdes/pubs/memo_chesapeakebay.pdf [11]

Washington Department of Ecology (Ecology). 2019. Criteria for Sewage Works Design. Department of Ecology, Olympia, WA. Publication Number 98-37.

<https://apps.ecology.wa.gov/publications/summarypages/9837.html> [2]

Washington Department of Ecology (Ecology). 2018. Permit Writer’s Manual. Department of Ecology, Olympia, WA. Publication Number 92-109.

<https://apps.ecology.wa.gov/publications/summarypages/92109.html> [2]

Washington State Department of Ecology (Ecology). 2018. Reclaimed Water Facilities Manual: The Purple Book. Department of Ecology, Olympia, WA. Publication Number 15-10-024. <https://apps.ecology.wa.gov/publications/summarypages/1010024.html> [2]

Washington State Department of Ecology (Ecology). 2009. Quality Assurance Project Plan Puget Sound Dissolved Oxygen Modeling Study: Intermediate-scale Model Development. Department of Ecology, Olympia, WA. Publication Number 09-03-110. <https://apps.ecology.wa.gov/publications/summarypages/0903110.html> [2]

The White House, 2020. Appendix C: Discount Rates for Cost-Effectiveness, Lease-Purchase, and Related Analysis for OMB Circular No. A-94. The White House, Washington, D.C.. https://www.whitehouse.gov/wp-content/uploads/2020/12/2020_Appendix-C.pdf [11]

COURT CASES

Natural Resources Defense Council, Inc. v. Douglas M. Costle, 568 F.2d 1369 (D.C. Cir. 1977) [6]

Natural Resources Defense Council, Inc. v. EPA, 673 F.2d 400, 403 (D.C. Cir. 1982) [6]

Natural Resources Defense Council, Inc v. EPA, 822 F.2d 104, 122-24 (D.C. Cir. 1987) [6]

Waterkeeper Alliance, Inc. v. U.S.E.P.A, 399 F.3d 486 (2d Cir. 2005) [6]

Citizens Coal Council v. U.S.E.P.A, 447 F.3d 879 (6th Cir. 2006) [6]

FEDERAL PUBLICATIONS

40 CFR 122: EPA Administered Permit Programs: The National Pollutant Discharge Elimination System [7]

40 CFR 122.21: Application for a Permit[7]

40 CFR 122.41: Conditions Applicable to all Permits [7]

40 CFR 122.44: Establishing limitations, standards, and other permit conditions [7]

40 CFR 122.48: Requirements for recording and reporting of monitoring results [7]

40 CFR 122.62: Modification or revocation and reissuance of permits [7]

40 CFR 125.3: Technology-based treatment requirements in permits [7]

40 CFR 131.45: Revision of Certain Federal Water Quality Criteria Applicable to Washington [7]

40 CFR 136: Guidelines Establishing Test Procedures for the Analysis of Pollutants [7]

Federal Water Pollution Control Act. 33 USC 1251 et seq.: : <http://www2.epa.gov/laws-regulations/summaryclean-water-act> [7]

REVISED CODE WASHINGTON (RCW)

Chapter 34.05 RCW: Administrative Procedures Act [7]

Chapter 43.21B RCW: Environmental and Land Use Hearings Office – PCHB [7]

Chapter 43.21C RCW: State environmental policy [7]

Chapter 90.48 RCW: Water Pollution Control [7]

Chapter 90.52 RCW: Pollution Disclosure Act of 1971 [7]

WASHINGTON ADMINISTRATIVE CODE (WAC)

Chapter 173-50 WAC: Accreditation of Environmental Laboratories [5]

Chapter 173-200 WAC: Water Quality Standards for Groundwaters of the State of Washington [5]

Chapter 173-201A WAC: Water Quality Standards for Surface Waters of the State of Washington [5]

Chapter 173-204 WAC: Sediment Management Standards [5]

Chapter 173-216 WAC: State Waste Discharge Permit Program [5]

Chapter 173-220 WAC: National Pollutant Discharge Elimination System Permit Program [5]

Chapter 173-221 WAC: Discharge Standards and Effluent Limitations for Domestic Wastewater Facilities [5]

Chapter 173-224 WAC: Water Quality Permit Fees [5]

Chapter 173-226 WAC: Waste Discharge General Permit Program [5]

Chapter 173-240 WAC: Submission of Plans and Reports for Construction of Wastewater Facilities [5]

Chapter 197-11-855 WAC: SEPA Rules for the Department of Ecology [5]

APPENDIX A - PUBLIC INVOLVEMENT INFORMATION

Ecology has tentatively determined to issue the Puget Sound Nutrient General Permit for municipal wastewater discharges as identified in Special Condition S1, [Permit Coverage](#).

Ecology publishes a Public Notice of Draft (PNOD) to inform the public that the draft permit and fact sheet are available for review and comment. Ecology will publish the PNOD on June 16, 2021, in the Washington State Register and on the Ecology web site (below). The PNOD informs the public that the draft permit and fact sheet are available for review and comment.

Ecology will also mail or email the notice to those identified as interested parties.

Copies of the draft general permit, fact sheet, and related documents are available for inspection and copying between the hours of 8:00 a.m. and 5:00 p.m. weekdays, by appointment, at Ecology's regional offices listed below or may be obtained from Ecology's website or by contacting Ecology by mail, phone, fax or email:

Internet: <https://ecology.wa.gov/Regulations-Permits/Permits-certifications/Nutrient-Permit>

Contact Ecology: Eleanor Ott
Department of Ecology
PO Box 47600
Olympia, WA 98504-7600
Telephone: (360) 407-6433 (office)
FAX: (360) 407-6426
E-mail: eleanor.ott@ecy.wa.gov

Southwest Regional Office

Water Quality Program
300 Desmond Drive
Lacey, Washington 98503
Phone: (360) 407-6300

Northwest Regional Office

Water Quality Program
3190 - 160th Avenue SE
Bellevue, Washington 98008
Phone: (425) 649-7000

Ecology will accept written comments on the draft Puget Sound Nutrient General Permit, Fact Sheet, and related documents from June 16, 2021 through August 2, 2021 (midnight); written comments must be postmarked or e-mailed no later than midnight August 2, 2021. Comments should reference specific permit conditions or text or when possible, and may address the following topics:

- Technical issues.
- Accuracy and completeness of information.

- The scope of proposed coverage.
- Adequacy of environmental protection and permit conditions.
- Any other concern that would result from issuance of the draft permit.

Ecology prefers comments be submitted by the eComment form located at:

<https://wq.ecology.commentinput.com/?id=QFkVE>

Written comments must be postmarked no later than midnight on August 2, 2021. Submit written comments to:

Eleanor Ott

Water Quality Program

Department of Ecology

PO Box 47600

Olympia, WA 98504-7600

eleanor.ott@ecy.wa.gov

Ecology will also conduct workshops and public hearings to provide an opportunity for interested parties to give formal oral testimony and comments on the draft permit. The public hearing will immediately follow the public workshop:

Tuesday, July 20, 2021 9:30 AM

Webinar* Join the webinar at

<https://watech.webex.com/watech/onstage/g.php?MTID=e8eac5891993f6c06ee701b3dbf290f49>

Wednesday, July 21, 2021 5:30 PM

Webinar* Join the webinar at

<https://watech.webex.com/watech/onstage/g.php?MTID=e52cb968b9cc7ab3e15aa9f4f269e1ba2>

*Both workshops and hearings will be offered via webinar where individuals may view the presentation and provide testimony via computer or mobile device.

Public notice regarding the hearing will be circulated at least thirty (30) days in advance of the hearings. Persons expressing an interest in this permit will be mailed an individual notice of hearing (WAC 173-220-100).

Further information may be obtained by contacting Eleanor Ott at Ecology, by phone at (360) 280-5624, by email at eleanor.ott@ecy.wa.gov, or by writing to Ecology's Olympia address listed above.

APPENDIX B - GLOSSARY

303(d) – Section 303(d) of the federal Clean Water Act requires states to develop a list of polluted waterbodies every two years. For each of those waterbodies, the law requires states to develop Total Maximum Daily Loads (TMDLs). A TMDL is the amount of pollutant loading that can occur in a given waterbody (river, marine water, wetland, stream, or lake) and still meet water quality standards.

40 CFR – Title 40 of the Code of Federal Regulations, which is the codification of the general and permanent rules published in the Federal Register by the executive departments and agencies of the federal government.

Action Level– An indicator value used to determine the effectiveness of best management practices at a WWTPs. Action levels are not water quality criteria or effluent limits by themselves but indicators of treatment optimization.

Active status - Refers to the permit coverage status when a Notice of Intent form has been submitted to and approved by Ecology.

AKART – An acronym for “all known, available, and reasonable methods of prevention, control, and treatment” AKART represents the most current methodology that can be reasonably required for preventing, controlling, or abating the pollutants and controlling pollution associated with a discharge. Described in chapters 90.48 and 90.54 RCW and chapter 173-201A, 173-204, 173-216, 173-220, and 173-221 WAC.

Alternative Restoration Plan – A near-term plan, or description of actions, with a schedule and milestones, that is more immediately beneficial or practicable to achieving water quality standards.

Antidegradation – The antidegradation policy of the state of Washington as generally guided by Chapters 90.48 and 90.54 RCW is applicable to any person's new or increased activity.

Beneficial Use – Identified uses of waters of the state shall include uses for domestic water, irrigation, fish, shellfish, game, and other aquatic life, municipal, recreation, industrial water, generation of electric power, and navigation.

Best Management Practices (BMPs) – Schedules of activities, prohibitions of practices, maintenance procedures, and other physical, structural and/or managerial practices to prevent or reduce the pollution of waters of the State. BMPs also include treatment systems, operating procedures, and practices to control: plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

Bypass – The intentional diversion of waste streams from any portion of a treatment facility.

Clean Water Act (CWA) – The Federal Water Pollution Control Act enacted by Public Law 92-500, as amended by Public Laws 95-217, 95-576, 96-483, 97-117; USC 1251 et seq.

Critical Condition – The time during which the combination of receiving water and waste discharge conditions have the highest potential for causing toxicity in the receiving water environment. This situation usually occurs when the flow within a water body is low, thus, its ability to dilute effluent is reduced.

Designated Uses – Those uses specified in this chapter for each water body or segment regardless of whether or not the uses are currently attained.

Discharge – The release of treated wastewater from a treatment plant outfall.

Discharger – An owner or operator of any facility or activity subject to regulation under Chapter 90.48 RCW or the Federal Clean Water Act.

Director – The Director of the Washington Department of Ecology or his/her authorized representative.

Dissolved Oxygen (DO) – A measure of how much free, non-compounded oxygen is present in water and available to living aquatic organisms.

Domestic Wastewater (Also municipal wastewater) - means water carrying human wastes, including kitchen, bath, and laundry wastes from residences, buildings, industrial establishments, or other places, together with such ground water infiltration or surface waters as may be present.

Ecology – The Washington State Department of Ecology

Eutrophication – excessive richness of nutrient in a body of water, frequently due to human sources which cause a dense growth of plant life and death of animal life from lack of oxygen

Facility – A wastewater treatment plant or publicly owned treatment work.

General Permit – A permit which covers multiple dischargers of a point source category within a designated geographical area, in lieu of individual permits being issued to each discharger.

Greater Puget Sound Region – The term to describe the marine area where human nutrient loads, from Washington Waters of the Salish Sea, contribute to waters not meeting marine DO standards. The GPS region include the Northern Bays (Bellingham, Samish, and Padilla Bays) as well as Puget Sound Proper, which are the marine waters south of the entrance of Admiralty Inlet (Whidbey Basin, Main Basin, South Sound, and Hood Canal). Regional human nutrient loads discharged directly to the Strait of Juan de Fuca and Strait of Georgia contribute to impairments in GPS (Ahmed et al., 2019).

Ground Water – A saturated zone or stratum beneath the land surface or a surface water body.

Impaired Waters (also 303(d) listed waters or impairments) – Listed waters refers to the specific segment of a waterbody listed as not meeting water quality criteria by the State as required under Section 303(d) of the Clean Water Act. The most current list of impaired waters is the applicable list.

Jurisdiction – A political unit such as a city, town or county; incorporated for local self-government.

Load Allocation - The portion of a receiving water's loading capacity that is allocated to one of its existing or future non-point sources of pollution.

Local Government – Any county, city, or town having its own government for local affairs.

Marine Point Source – Point sources (see “point source” definition below) that discharge specifically to, or in close proximity to, marine waters. Marine point sources are included as inputs into the Salish Sea Model and are “Permittees.”

Mixing Zone – An area that surrounds an effluent discharge within which water quality criteria may be exceeded. The area of the authorized mixing zone is specified in a facility's permit and follows procedures outlined in state regulations (Chapter 173-201A WAC).

National Pollutant Discharge Elimination System (NPDES) means the national program for issuing, modifying, revoking and reissuing, terminating, monitoring, and enforcing permits, and imposing and enforcing pretreatment requirements, under sections 307, 402, 318, and 405 of the Federal Clean Water Act, for the discharge of pollutants to surface waters of the state from point sources.

Notice of Intent (NOI) means the application for, or a request for coverage under this General Permit pursuant to WAC 173-226-200.

Noncompliance – The inability to comply with any of the terms and conditions of the permit which causes a threat to human health or the environment.

Operator – Any individual who performs routine duties, onsite at a wastewater treatment plant that affect plant performance or effluent quality.

Operator in Responsible Charge – The individual who is designated by the owner as the person routinely onsite and in direct charge of the overall operation and maintenance of a wastewater treatment plant.

Optimization (also treatment optimization) – A best management practice (BMP) resulting in the refinement of WWTP operations that lead to improved effluent water quality and/or treatment efficiencies.

Organic Nitrogen – Nitrogen chemically bound to organic molecules, such as proteins, amines, and amino acids. Can be measured as part of the Total Kjeldahl Nitrogen analysis.

Overburdened Communities – A geographic area where vulnerable populations face combined, multiple environmental harms and health impacts, and includes, but is not limited to, highly impacted communities as defined in RCW 19.405.020.

Owner – A town or city, a county, a sewer district, board of public utilities, association, municipality or other public body.

Permit – An authorization, license, or equivalent control document issued by the director.

Permittee – An entity that receives notice of coverage under this general permit.

pH – The pH of a liquid measures its acidity or alkalinity. A pH of 7 is defined as neutral. Large variations above or below this value are considered harmful to most aquatic life.

Point Source – Any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, and container from which pollutants are or may be discharged to surface waters of the state. This term does not include return flows from irrigated agriculture.

Pollutant - Means dredged spoil, solid waste, incinerator residue, filter backwash, sewage, garbage, domestic sewage sludge (biosolids), munitions, chemical wastes, biological materials, radioactive materials, heat, wrecked or discarded equipment, rock, sand, cellar dirt, and industrial, municipal, and agricultural waste. This term does not include sewage from vessels within the meaning of section 312 of the CWA, nor does it include dredged or fill material discharged in accordance with a permit issued under section 404 of the CWA.

Pollution – The contamination or other alteration of the physical, chemical, or biological properties of waters of the state; including change in temperature, taste, color, turbidity, or odor of the waters; or such discharge of any liquid, gaseous, solid, radioactive or other substance into any waters of the State as will or is likely to create a nuisance or render such waters harmful, detrimental or injurious to the public health, safety or welfare; or to domestic, commercial, industrial, agricultural, recreational, or other legitimate beneficial uses; or to livestock, wild animals, birds, fish or other aquatic life.

Publicly Owned Treatment Work (POTW) – A sewage treatment plant that is owned and usually operated by a municipality or other public agency.

Puget Sound Nutrient Forum (PSNF) – Formed by Ecology in 2017 as a large public advisory group to support the Puget Sound Nutrient Source Reduction Project and discuss, learn, and provide input on how to reduce human sources of nutrients enters the greater Puget Sound region.

Puget Sound Nutrient Source Reduction Project (PSNSRP)– A collaborative effort with Puget Sound communities and stakeholder to address human sources of nutrients.

Reasonable potential – The likelihood of a pollutant to cause or contribute to an excursion of a water quality standard.

Receiving Water – The waterbody at the point of discharge.

Salish Sea – Puget Sound, Strait of Georgia, and Strait of Juan de Fuca, including their connecting channels and adjoining waters.

Salish Sea Model (SSM) (also *model*) – A predictive coastal ocean model for estuarine research, restoration planning, water-quality management, and climate change response assessment developed by PNNL in conjunction with Ecology.

SEPA (State Environmental Policy Act) - The Washington State Law, RCW 43.21C.020, intended to prevent or eliminate damage to the environment.

Site – The land area where any "facility" is physically located.

Surface Waters of the State (also surface water) – Lakes, rivers, ponds, streams, inland waters, salt waters, and all other surface waters and water courses within the jurisdiction of the state of Washington.

Technology-based Effluent Limit (TBEL)– A permit limit that is based on the ability of a treatment method to reduce the pollutant.

Total Daily Maximum Load (TMDL) – A calculation of the maximum amount of a pollutant that a waterbody can receive and still meet State water quality standards, a TMDL is the sum of the allowable loads of a single pollutant from all contributing point and nonpoint sources.

Total Inorganic Nitrogen (TIN) – The sum of ammonia, nitrate and nitrite. It includes dissolved and particulate fractions.

Total Kjeldahl Nitrogen (TKN) – The combined amount of organic and ammonia nitrogen.

Total Organic Carbon (TOC) – The amount of carbon bound in organic compounds in a sample. Because all organic compounds have carbon as the common element, total organic carbon measurements provide a fundamental means of assessing the degree of organic pollution.

Total Suspended Solids (TSS) – An analytical laboratory measurement of the concentration of solids suspended in water.

Upset – An exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limitations because of factors beyond the reasonable control of the Permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, lack of preventative maintenance, or careless or improper operation.

USEPA (also EPA) – United States Environmental Protection Agency.

Washington Waters of the Salish Sea – Areas of the Salish Sea subject to Washington State's Water Pollution Control Act (Chapter 90.48 RCW).

Wasteload Allocation (WLA) – The portion of a receiving water's loading capacity that is allocated to one of its existing or future point sources of pollution. WLAs constitute a type of water quality based effluent limitation (40 CFR 130.2(h)).

Watershed inflow – A freshwater pathway that delivers nutrients and drains watershed areas and represent the delivery of flow and nutrient inputs into the Salish Sea Model. In the

model, these estimates are for the mouth of each river, stream or watershed and represent loading at the point at which the freshwater inflow enters the Salish Sea. These estimates include but do not distinguish between various upstream point and nonpoint sources in the watersheds that contribute to loading at the mouth.

Water Quality – The chemical, physical, and biological characteristics of water, usually with respect to its suitability for a particular purpose.

Water Quality-based Effluent Limit (WQBEL) – A limit on the concentration of an effluent parameter that is intended to prevent the concentration of that parameter from exceeding its water quality criterion after it is discharged into receiving water.

Water quality standards – The state of Washington's water quality standards for surface waters of the state, which are codified in chapter 173-201A WAC or ground waters of the state, which are codified in chapter 173-200 WAC.

Waters of the State – Those waters as defined as "waters of the United States" in 40 CFR Subpart 122.2 within the geographic boundaries of Washington State and "waters of the state" as defined in Chapter 90.48 RCW which include lakes, rivers, ponds, streams, inland waters, underground waters, salt waters and all other surface waters and water courses within the jurisdiction of the state of Washington.

APPENDIX C – RESPONSE TO COMMENTS

This Response to Comments addresses comments received on the formal draft of the Puget Sound Nutrient General Permit and addresses changes made to the formal draft based upon comments received. It is included as Appendix C to the Fact Sheet for the Puget Sound Nutrient General Permit and will be published as a separate document on the permit webpage.

The public comment period for this permit began on June 16, 2021 and lasted until 11:59 p.m. of August 2, 2021, as noted in Appendix A.

APPENDIX D – PERMITTEE CATEGORY DETERMINATION

Ecology used single sample 2019 DMR data to determine the average daily load for each Permittee subject to coverage under the proposed permit. This exercise determined whether Permittees qualify as either a dominant or a small TIN loader based on the TIN loading magnitude relative to all Permittees subject to permit coverage. Dominant loaders equate to approximately 99% of the total TIN load from domestic WWTPs and are subject to draft permit condition S4. Permittees under 100 lbs/day equate to approximately 1% of the total TIN load from domestic WWTPs and are subject to draft permit condition S5.

Wastewater Treatment Plant	Individual NPDES Permit Number	2019 Nutrient Loading, Lbs/Day	Cumulative Nutrient Loading, Lbs/day	% of Total Cumulative Load
Metro West Point	WA0029181	18,290	18,290	25.6%
King County South Treatment Plant	WA0029581	17,075	35,365	49.6%
Tacoma Central No. 1	WA0037087	6,058	41,423	58.1%
Chambers Creek WWTP	WA0039624	5,027	46,450	65.1%
King County Brightwater WWTP	WA0032247	4,982	51,432	72.1%
Everett STP	WA0024490	3,636	55,068	77.2%
Post Point Plant (Bellingham)	WA0023744	2,351	57,419	80.5%
Marysville City Public Works	WA0022497	1,362	58,781	82.4%
Lakota WWTP, Lakehaven Utility District	WA0022624	1,291	60,072	84.2%
Bremerton STP	WA0029289	1,095	61,167	85.8%

Wastewater Treatment Plant	Individual NPDES Permit Number	2019 Nutrient Loading, Lbs/Day	Cumulative Nutrient Loading, Lbs/day	% of Total Cumulative Load
Tacoma North No. 3	WA0037214	933	62,100	87.1%
Lynnwood City WWTP	WA0024031	879	62,979	88.3%
Midway Sewer District	WA0020958	877	63,856	89.5%
Mt Vernon WWTP	WA0024074	875	64,731	90.8%
Edmonds STP	WA0024058	864	65,595	92.0%
Miller Creek WWTP	WA0022764	616	66,211	92.8%
LOTT WWTF	WA0037061	601	66,812	93.7%
Port Orchard WWTP	WA0020346	506	67,318	94.4%
Blaine STP Lighthouse Point ¹	WA0022641	502	67,820	95.1%
Central Kitsap Treatment Facility	WA0030520	474	68,294	95.8%
Salmon Creek WWTP	WA0022772	467	68,761	96.4%
Port Angeles STP	WA0023973	466	69,227	97.1%
Redondo WWTP	WA0023451	440	69,667	97.7%
Anacortes WWTP	WA0020257	373	70,040	98.2%
Lake Stevens Sewer District WWTP	WA0020893	309	70,349	98.6%
Snohomish STP	WA0029548	185	70,534	98.9%

Wastewater Treatment Plant	Individual NPDES Permit Number	2019 Nutrient Loading, Lbs/Day	Cumulative Nutrient Loading, Lbs/day	% of Total Cumulative Load
Birch Bay STP	WA0029556	169	70,703	99.1%
Alderwood WWTP	WA0020826	96	70,799	99.3%
Oak Harbor STP	WA0020567	84	70,883	99.4%
Gig Harbor STP	WA0023957	71	70,954	99.5%
La Conner STP	WA0022446	55	71,009	99.6%
Shelton City WWTP	WA0023345	45	71,054	99.6%
Port Townsend City WWTP	WA0037052	38	71,092	99.7%
Eastsound Sewer And Water District WWTP	WA0030571	26	71,118	99.7%
Kitsap County Manchester	WA0023701	24	71,142	99.8%
Stanwood STP	WA0020290	20	71,162	99.8%
Coupeville Town STP	WA0029378	19	71,180	99.8%
Kitsap County Sewer Dist 7	WA0030317	18	71,198	99.8%
Mukilteo WWTP	WA0023396	17	71,215	99.9%
Sequim STP	WA0022349	15	71,230	99.9%
Friday Harbor STP	WA0023582	13	71,243	99.9%

Wastewater Treatment Plant	Individual NPDES Permit Number	2019 Nutrient Loading, Lbs/Day	Cumulative Nutrient Loading, Lbs/day	% of Total Cumulative Load
WA Doc McNeil Island STP	WA0040002	10	71,253	99.9%
Bainbridge Island City Of Bainbridge	WA0020907	10	71,263	99.9%
WA Doc Clallam Bay Corrections Center Cc	WA0039845	9	71,272	99.9%
Boston Harbor STP	WA0040291	7	71,279	100.0%
Langley STP	WA0020702	7	71,286	100.0%
Skagit Co. #2, Big Lake	WA0030597	6	71,292	100.0%
Tamoshan STP	WA0037290	5	71,297	100.0%
Penn Cove WWTP	WA0029386	4	71,301	100.0%
Sekiu STP	WA0024449	4	71,305	100.0%
Kingston WWTP Kitsap County	WA0032077	3	71,308	100.0%
Hartstene Pointe STP	WA0038377	2	71,310	100.0%
Vashon STP	WA0022527	2	71,312	100.0%
Fisherman Bay STP	WA0030589	1	71,313	100.0%
WA Parks Larrabee State Park	WA0023787	0.3	71,313	100.0%
Clallam Bay STP	WA0024431	-	71,313	100.0%

Wastewater Treatment Plant	Individual NPDES Permit Number	2019 Nutrient Loading, Lbs/Day	Cumulative Nutrient Loading, Lbs/day	% of Total Cumulative Load
Eastsound Orcas Village WWTP	WA0030911	-	71,313	100.0%
Rustlewood STP	WA0038075	-	71,313	100.0%

¹ The Lighthouse Point WRF DMR data included nutrients starting in mid-2019 so Ecology used part of 2020 data to allow evaluation of a full year.

APPENDIX E – DATA USED IN ACTION LEVEL CALCULATIONS

Ecology used all representative DMR data available for individual WWTPs subject to coverage under the proposed permit to determine the facility specific action level. Revisions to action levels between the preliminary draft and the formal draft reflect the reviews conducted by each WWTP and their permit manager.

Wastewater Treatment Plant	Action Level, TIN lbs/year	Data Range Used in Calculation	Notes
Anacortes WWTP	163,000	1/1/16-3/31/19	
Birch Bay Sewage Treatment Plant (STP)	64,600	1/4/17-1/1/20	
Blaine STP (Lighthouse Point WRF)	18,200	7/2/2019 – 6/2/2020	2020 data included to complete 12 months
Bremerton WWTP	577,000	12/1/18-12/31/19	
Kitsap County Central Kitsap WWTP	250,000	8/1/17-12/31/19	
Chambers Creek WWTP	1,880,000	10/1/13-3/31/18	Data after 3/2018 excluded due to pilot testing at facility
Edmonds STP	419,000	6/1/2014-3/1/2020	Data range to capture historic variability, excluding flow from 2020 pandemic with outlier removed and missing value added per

Wastewater Treatment Plant	Action Level, TIN lbs/year	Data Range Used in Calculation	Notes
			City comments dated 3/15/21
Everett STP	1,530,000	11/1/15-3/1/20	Bootstrap set 2nd season Jul-Oct to prevent oversampling of seasonal monitoring data that had been collected at a higher frequency.
King County Brightwater WWTP	1,810,000	10/1/17-9/30/20	Date range with complete single sample data available in PARIS. Range provides 152 data points for all parameters.
King County South WWTP	7,340,000	10/1/17-9/30/20	Limited to most recent 36 months due to abundance of available data. Range provides 355 data points for ammonia and 268 data points for nitrate/nitrite.
King County West Point WWTP	6,670,000	10/1/17-9/30/20	Limited to most recent 36 months due to abundance of available data

Wastewater Treatment Plant	Action Level, TIN lbs/year	Data Range Used in Calculation	Notes
			and known treatment plant issues in early 2017. Range provides 136 data points for ammonia and 36 data points for nitrate/nitrite.
Lake Stevens Sewer District WWTP	118,000	1/5/16-11/3/20	
Lakota WWTP	583,000	1/1/17-10/31/20	
LOTT Budd Inlet WWTF	243,000	1/1/18-12/31/20	
Lynnwood STP	341,000	11/1/13-3/1/20	Data range to capture historic variability
Marysville STP	577,000	1/1/15-10/20/20	
Midway Sewer District WWTP	601,400	1/1/16-2/1/20	Did not include 2020 data due to unrepresentative airport flows during pandemic. Adjusted load to account for grab sampling method; Dual sample and reevaluate 1 year from effective.

Wastewater Treatment Plant	Action Level, TIN lbs/year	Data Range Used in Calculation	Notes
Miller Creek WWTP	289,900	10/22/13-10/13/20	
Mt Vernon WWTP	380,000	1/1/17-2/29/20	
Port Angeles WWTP	170,000	1/4/16-10/26/20	
Port Orchard WWTP (South Kitsap WRF)	208,000	1/1/17-12/31/19	
Post Point WWTP (Bellingham STP)	969,000	1/02/17-3/2/20	Normalized to end of March 2020
Redondo WWTP	241,000	8/1/13-10/31/20	
Salmon Creek WWTP	195,000	4/8/13-10/13/20	
Snohomish STP	78,900	7/1/13-9/30/20	Use all data to capture historic variability
Tacoma Central No. 1 WWTP	2,410,000	8/1/14-10/31/20	
Tacoma North No. 3 WWTP	336,000	9/1/14-10/31/20	

PUGET SOUND
NUTRIENT
GENERAL
PERMIT

Issuance Date: December 1, 2021
Effective Date: January 1, 2022
Expiration Date: December 31, 2026


PUGET SOUND NUTRIENT GENERAL PERMIT

A NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM AND STATE WASTE DISCHARGE GENERAL PERMIT

State of Washington
Department of Ecology
Olympia, Washington

In compliance with the provisions of
The State of Washington Water Pollution Control Law
Chapter 90.48 Revised Code of Washington
and
The Federal Water Pollution Control Act
(The Clean Water Act)
Title 33 United States Code, Section 1251 et seq.

Until this permit expires, is modified or revoked, Permittees that have properly obtained coverage under this general permit are authorized to discharge nutrients in accordance with the conditions, which follow.

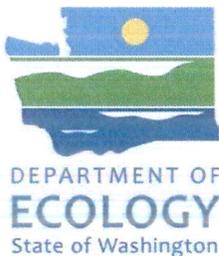

Vincent McGowan, P.E.
Water Quality Program Manager
Washington State Department of Ecology

TABLE OF CONTENTS

SUMMARY OF PERMIT REPORT SUBMITTALS	5
SPECIAL CONDITIONS.....	7
S1. PERMIT COVERAGE	7
A. Coverage Area And Eligible Discharges	7
B. Limits on Coverage.....	9
S2. APPLICATION FOR COVERAGE	10
A. Obtaining Permit Coverage.....	10
B. How to Apply for Permit Coverage.....	10
C. Permit Coverage Effective Date.....	10
D. Modification of Permit Coverage.....	11
S3. COMPLIANCE WITH STANDARDS.....	11
S4. NARRATIVE EFFLUENT LIMITS FOR WWTPS WITH DOMINANT TIN LOADS	11
A. Applicability and Narrative Effluent Limits	11
B. TIN Action Levels.....	12
C. Nitrogen Optimization Plan and Report	13
D. Action Level Exceedance Corrective Actions	15
E. Nutrient Reduction Evaluation	16
S5. NARRATIVE EFFLUENT LIMITS FOR WWTPS WITH MODERATE TIN LOADS	18
A. Applicability and Narrative Effluent Limits	18
B. TIN Action Levels.....	19
C. Nitrogen Optimization Plan and Report	20
D. Action Level Exceedance Corrective Actions	22
E. Nutrient Reduction Evaluation	24
S6. NARRATIVE EFFLUENT LIMITS FOR WWTPS WITH SMALL TIN LOADS	26
A. Applicability and Narrative Effluent Limits	26
B. Nitrogen Optimization Plan and Report	28
C. AKART Analysis.....	30
S7. MONITORING SCHEDULES AND SAMPLING REQUIREMENTS	32
A. Monitoring Requirements For Dominant Loaders.....	32
B. Monitoring Requirements For Moderate Loaders	35
C. Monitoring Requirements For Small Loaders.....	38
D. Sampling And Analytical Procedures	41
E. Flow Measurement.....	41
F. Laboratory Accreditation	41
G. Request For Reduction In Monitoring	41
S8. DISCHARGES TO 303(D) OR TMDL WATER BODIES	42
S9. REPORTING AND RECORDKEEPING REQUIREMENTS	43
A. Discharge Monitoring Reports.....	43
B. Monitoring Requirements	43
C. Annual Report for Dominant Loaders.....	44

D.	Annual Report for Moderate Loaders.....	44
E.	Reporting for Small Loaders.....	45
F.	Records Retention.....	45
G.	Noncompliance Notification	45
H.	Access to Plans and Records.....	46
S10.	PERMIT FEES	46
	GENERAL CONDITIONS.....	47
G1.	DISCHARGE VIOLATIONS.....	47
G2.	SIGNATORY REQUIREMENTS	47
G3.	RIGHT OF INSPECTION AND ENTRY.....	48
G4.	GENERAL PERMIT MODIFICATION AND REVOCATION	48
G5.	REVOCATION OF COVERAGE UNDER THE PERMIT	48
G6.	COMPLIANCE WITH OTHER LAWS AND STATUTES.....	49
G7.	DUTY TO REAPPLY	49
G8.	TRANSFER OF GENERAL PERMIT COVERAGE	49
G9.	REMOVED SUBSTANCES	49
G10.	DUTY TO PROVIDE INFORMATION	49
G11.	OTHER REQUIREMENTS OF 40 CFR	49
G12.	ADDITIONAL MONITORING	49
G13.	PENALTIES FOR VIOLATING PERMIT CONDITIONS.....	50
G14.	PROPERTY RIGHTS	50
G15.	DUTY TO COMPLY.....	50
G16.	TOXIC POLLUTANTS.....	50
G17.	PENALTIES FOR TAMPERING	50
G18.	REPORTING PLANNED CHANGES.....	50
G19.	REPORTING OTHER INFORMATION.....	50
G20.	REPORTING ANTICIPATED NON-COMPLIANCE	51
G21.	APPEALS.....	51
G22.	SEVERABILITY.....	51
G23.	BYPASS PROHIBITED	51
	APPENDIX A – DEFINITIONS	52
	APPENDIX B – ACRONYMS	56
	APPENDIX C – ANNUAL REPORT QUESTIONS FOR DOMINANT LOADERS.....	57
	APPENDIX D – ANNUAL REPORT QUESTIONS FOR MODERATE LOADERS.....	59
	APPENDIX E – ONE TIME REPORT QUESTIONS FOR SMALL LOADERS.....	61

LIST OF TABLES

Table 1. Summary of Permit Report Submittals	5
Table 2. Summary of Required On-Site Documentation	6
Table 3. List of Domestic WWTPs Discharging to Puget Sound	7
Table 4. Narrative Effluent Limitations for Dominant TIN Loaders.....	12
Table 5. Dominant WWTPs and Total Inorganic Nitrogen Action Levels	12
Table 6. Bubbled Action Levels for Corrective Action Assessment	13
Table 7. Narrative Effluent Limitations for Moderate TIN Loaders.....	19
Table 8. Moderate WWTPs and Total Inorganic Nitrogen Action Levels	19
Table 9. Bubbled Action Levels for Corrective Action Assessment	20
Table 10. Narrative Effluent Limitations for WWTPs with Small TIN Loads.....	26
Table 11. Permittees with Small TIN Loads	27
Table 12. Influent Sampling Requirements for S4 Permittees	32
Table 13. Effluent Sampling Requirements for S4 Permittees	33
Table 14. Footnotes for Influent and Effluent Monitoring Tables 12 and 13.....	34
Table 15. Influent Sampling Requirements for S5 Permittees	35
Table 16. Effluent Sampling Requirements for S5 Permittees	36
Table 17. Footnotes for Influent and Effluent Monitoring Tables 15 and 16.....	37
Table 18. Influent Sampling Requirements for S6 Permittees	38
Table 19. Effluent Sampling Requirements for S6 Permittees	39
Table 20. Footnotes for Influent and Effluent Monitoring Tables 18 and 19	40

SUMMARY OF PERMIT REPORT SUBMITTALS

Refer to the Special and General Conditions within this permit for additional submittal requirements. Appendix A provides a list of definitions. Appendix B provides a list of acronyms.

Table 1. Summary of Permit Report Submittals

Permit Section	Submittal	Frequency	First Submittal Date
S2.A.1	Permit Application (Notice of Intent)	Once	For new Permittees: No later than 90 days following permit issuance
S4.C	Nitrogen Optimization Report for Dominant Loaders	Annually	March 31, 2023
S4.D	Corrective Action Engineering Report	As necessary	
S4.E	Nutrient Reduction Evaluation for Dominant Loaders	1/permit cycle	December 31, 2025
S5.C	Nitrogen Optimization Report for Moderate Loaders	Annually	March 31, 2023
S5.D	Corrective Action Engineering Report	As necessary	
S5.E	Nutrient Reduction Evaluation for Moderate Loaders	1/permit cycle	December 31, 2025
S6.B	Nitrogen Optimization Report for Small Loaders	1/permit cycle	March 31, 2026
S5.D	AKART Evaluation for Small Loaders	1/permit cycle	December 31, 2025
S9.A	Discharge Monitoring Reports (DMRs)	Monthly	Within 15 days of applicable monitoring period
G2	Notice of Change in Authorization	As necessary	As necessary
G7	Application for Permit Renewal	1/permit cycle	No later than 180 days before expiration
G20	Reporting Anticipated Non-Compliance	As necessary	As necessary

Table 2. Summary of Required On-Site Documentation

Permit Condition(s)	Document Title
S9.B.3	Original Sampling Records (Field notes, as applicable and Laboratory Reports)
S9.G.1.a	Copy of Permit Coverage Letter
S9.G.1.b	Copy of Puget Sound Nutrient General Permit
S9.G.1.c	Copies of Discharge Monitoring Reports
S9.G.1.d	Copies of attachment to the Annual or Single NOP Reports (as applicable)
S9.G.1.e	Copy of the Nutrient Reduction Evaluation or AKART Analysis (as applicable)

The Department of Ecology is committed to providing people with disabilities access to information and services by meeting or exceeding the requirements of the Americans with Disabilities Act (ADA), Section 504 and 508 of the Rehabilitation Act, and Washington State Policy #188.

To request ADA Accommodation, contact Water Quality Reception at 360-407-6600. For Washington Relay Service or TTY call 711 or 877-833-6341. Visit [Ecology's accessibility webpage](#)¹ for more information.

For document translation services, call Water Quality Reception at 360-407-6600. Por publicaciones en espanol, por favor llame Water Quality Reception al 360-407-6600.

¹ <https://ecology.wa.gov/About-us/Accountability-transparency/Our-website/Accessibility>

SPECIAL CONDITIONS

S1. PERMIT COVERAGE

A. COVERAGE AREA AND ELIGIBLE DISCHARGES

This Puget Sound Nutrient General Permit (PSNGP) applies to the 58 publically owned **domestic wastewater** treatment plants (WWTPs) discharging into **Washington Waters of the Salish Sea**, except for federal and Tribal lands and waters as specified in Special Condition S1.D. Table 3 identifies the WWTPs covered by this permit along with their individual **NPDES** permit number for reference. This proposed permit assigns a category to each WWTP based on their percentage of the **total inorganic nitrogen (TIN)** load currently discharged to Washington Waters of the Salish Sea. Special Condition S4 lists permit conditions and limits for the WWTPs with the **dominant (D) TIN loads**. Special Condition S5 lists the conditions and limits for the WWTPs with **moderate (M) loads**. Special Condition S6 lists the conditions and limits for the WWTPs with **small (S) loads**.

Table 3. List of Domestic WWTPs Discharging to Puget Sound

Wastewater Treatment Plant	Individual NPDES Permit Number	Category
Alderwood Sewage Treatment Plant (STP)	WA0020826	S
Anacortes WWTP	WA0020257	M
Bainbridge Island WWTP	WA0020907	S
Birch Bay Sewage Treatment Plant (STP)	WA0029556	M
Boston Harbor STP	WA0040291	S
Bremerton WWTP	WA0029289	M
Clallam Bay WWTP	WA0024431	S
Clallam Bay Corrections Center WWTP	WA0039845	S
Coupeville WWTP	WA0029378	S
Eastsound Orcas Village WWTP	WA0030911	S
Eastsound Sewer and Water District WWTP	WA0030571	S
Edmonds STP	WA0024058	M
Everett STP	WA0024490	D
Fisherman Bay STP	WA0030589	S
Friday Harbor STP	WA0023582	S
Gig Harbor WWTP	WA0023957	S
Hartstene Pointe STP	WA0038377	S
King County, Brightwater WWTP	WA0032247	D

Wastewater Treatment Plant	Individual NPDES Permit Number	Category
King County, South WWTP	WA0029581	D
King County, Vashon WWTP	WA0022527	S
King County, West Point WWTP	WA0029181	D
Kitsap County, Central Kitsap WWTP	WA0030520	M
Kitsap County, Kingston WWTP	WA0032077	S
Kitsap County, Manchester WWTP	WA0023701	S
Kitsap County Sewer District #7 Water Reclamation Facility (WRF)	WA0030317	S
La Conner STP	WA0022446	S
Lake Stevens Sewer District WWTP	WA0020893	M
Lakota WWTP	WA0022624	M
Langley WWTP	WA0020702	S
Lighthouse Point WRF/Blaine STP	WA0022641	M
LOTT Budd Inlet WRF	WA0037061	M
Lynnwood STP	WA0024031	M
Marysville STP	WA0022497	M
McNeil Island Special Commitment Center WWTP	WA0040002	S
Midway Sewer District WWTP	WA0020958	M
Miller Creek WWTP	WA0022764	M
Mt Vernon WWTP	WA0024074	M
Mukilteo Water and Wastewater District WWTP	WA0023396	S
Oak Harbor STP	WA0020567	S
Penn Cove WWTP	WA0029386	S
Pierce County Chambers Creek Regional WWTP	WA0039624	D
Port Angeles WWTP	WA0023973	M
Port Orchard WWTP (South Kitsap WRF)	WA0020346	M
Port Townsend STP	WA0037052	S
Post Point WWTP (Bellingham STP)	WA0023744	D
Redondo WWTP	WA0023451	M
Rustlewood WWTP	WA0038075	S
Salmon Creek WWTP	WA0022772	M

Wastewater Treatment Plant	Individual NPDES Permit Number	Category
Sekiu WWTP	WA0024449	S
Sequim WRF	WA0022349	S
Shelton WWTP	WA0023345	S
Skagit County Sewer District 2 Big Lake WWTP	WA0030597	S
Snohomish STP	WA0029548	M
Stanwood STP	WA0020290	S
Tacoma Central No. 1 WWTP	WA0037087	D
Tacoma North No. 3 WWTP	WA0037214	M
Tamoshan STP	WA0037290	S
WA Parks Larrabee WWTP	WA0023787	S

B. LIMITS ON COVERAGE

Coverage under this General Permit does not include discharges from WWTPs not listed in Table 3. Coverage under this General Permit also excludes all discharges from non-WWTP outfalls.

This permit does not cover the following discharges:

1. Discharges from facilities located on “Indian Country” as defined in 18 U.S.C. §1151, except portions of the Puyallup Reservation as noted below. Indian Country includes:
 - a. All land within any Indian Reservation, notwithstanding the issuance of any patent, and including rights-of-way running through the reservation. This includes all federal, tribal, and Indian and non-Indian privately owned land within the reservation.
 - b. All off-reservation Indian allotments, the Indian titles to which have not been extinguished, including rights-of-way running through the same.
 - c. All off-reservation federal trust lands held for Native American Tribes.

Puyallup Exception: Following the *Puyallup Tribes of Indians Land Settlement Act of 1989*, 25 U.S.C. §1773, the permit does apply to land within the Puyallup Reservation except for discharges to surface water on land held in trust by the federal government.

2. Discharges from activities operated by any department, agency, or instrumentality of the executive, legislative, and judicial branches of the Federal Government of the United States, or another entity, such as a private contractor, performing industrial activity for any such department, agency, or instrumentality.

3. Discharges from any industrial or privately owned domestic wastewater treatment plant into Washington waters of the Salish Sea.
4. Discharges from domestic WWTPs entering tributary watersheds to Washington waters of the Salish Sea, upstream of Ecology ambient monitoring stations.

S2. APPLICATION FOR COVERAGE

A. OBTAINING PERMIT COVERAGE

1. The **owner/operator** seeking coverage under this permit must apply for permit coverage within the following time limits.
 - a. Existing facilities are WWTPs in operation prior to the effective date of this permit, January 1, 2022 and are identified in Table 3.
 - b. The owner/operator of an existing domestic wastewater treatment plant must submit a complete application for coverage no later than ninety (90) **days** after the issuance date of this permit. Upon submittal of a complete application for coverage (also called a **Notice of Intent** or NOI) **Ecology** will issue a decision on permit coverage pursuant to Special Condition S2.C.

B. HOW TO APPLY FOR PERMIT COVERAGE

The owner/operator seeking coverage under this permit must do the following:

1. Submit to Ecology, a complete application for coverage using the permit specific Notice of Intent through Ecology's Water Quality Permitting Portal: <https://secureaccess.wa.gov/ecy/wqwebportal>. The **applicant** must submit this application for coverage electronically. For more information about the WQWebPortal, visit Ecology's [WQWebPortal guidance webpage](#)².
2. A responsible person, as defined in General Condition G2, must sign the signature page of the NOI and submit it to Ecology.
3. Public Notice
 - a. Public notice of the application for coverage is not required for the facilities subject to this general permit because they are all existing facilities.
 - b. The owner/operator of an existing facility with coverage under the Puget Sound Nutrient General Permit (**Permittee**) wanting to modify their permit coverage must comply with public notice requirements specified in Special Condition S2.D.2.

C. PERMIT COVERAGE EFFECTIVE DATE

Permit coverage begins on the day Ecology issues the coverage letter to the applicant.

² <https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Water-quality-permits-guidance/WQWebPortal-guidance>

D. MODIFICATION OF PERMIT COVERAGE

A permittee requesting a reduction in monitoring, or a change in action level, or otherwise requesting a modification of permit coverage, must submit a complete Modification of Coverage Form to Ecology. The Permittee must:

1. Apply for modification of coverage at least 60 days prior to the change necessitating the coverage modification.
2. Complete the public notice requirements in WAC 173-226-130(5) as part of a complete application for modification of coverage.
3. Comply with **SEPA** as part of a complete application for modification of coverage if undergoing a significant process change driven by a corrective action.

S3. COMPLIANCE WITH STANDARDS

- A.** Discharges must not cause or contribute to a violation of surface water quality standards (Chapter 173-201A WAC), sediment management standards (Chapter 173-204 WAC), or human health-based criteria in the Federal water quality criteria applicable to Washington (40 CFR Part 135.45). This permit does not authorize discharge in violation of water quality standards.
- B.** Ecology presumes that a Permittee complies with water quality standards unless discharge monitoring data or other *site*-specific information demonstrates that a discharge causes or contributes to a violation of water quality standards, when the Permittee complies with the following conditions. The Permittee must fully comply with all permit conditions, including planning, **optimization**, corrective actions (as necessary), sampling, monitoring, reporting, waste management, and recordkeeping conditions.

S4. NARRATIVE EFFLUENT LIMITS FOR WWTPS WITH DOMINANT TIN LOADS

A. APPLICABILITY AND NARRATIVE EFFLUENT LIMITS

Beginning on the effective date, each of the Permittees with dominant TIN loads listed in Table 5 may discharge TIN from the WWTP through the designated **outfall(s)** described in its individual NPDES permit. See Table 3 in Section S1.A for the load category assignment.

All discharges and activities authorized by this permit must comply with the terms and conditions of this permit. Each Permittee listed in Table 5 must comply with the facility specific or bubbled **action levels** and narrative effluent limits listed in Table 4, which constitute the suite of **best management practices** (BMPs) required for a water quality based effluent limit under 40 CFR 122.44(k).

Table 4. Narrative Effluent Limits for Dominant TIN Loaders

Parameter	Narrative Effluent Limit
Monitoring	Monitor and report per the requirements in S7.A.
Nitrogen Optimization Plan	Optimize treatment performance to stay below the action level. Submit Optimization Report annually per the requirements in S4.C
Nutrient Reduction Evaluation	Submit Nutrient Reduction Evaluation per the requirements in S4.E

B. TIN ACTION LEVELS

If the action level listed in Table 5 for individual WWTPs or the bubbled action levels listed for single jurisdictions in Table 6 are exceeded, the Permittee must employ corrective actions identified in S4.D.

The annual Action Level is the sum of monthly nutrient loads measured over one year. Ecology will assess this total once per year based on the Permittee’s Annual Report.

Table 5. Dominant WWTPs and Total Inorganic Nitrogen Action Levels

Wastewater Treatment Plant	Individual NPDES Permit Number	Action Level, TIN lbs/year	Outfall Number
Everett STP	WA0024490	1,530,000	100/015
King County Brightwater WWTP ¹	WA0032247	1,810,000	001
King County South WWTP ¹	WA0029581	7,340,000	001
King County West Point WWTP ¹	WA0029181	6,670,000	001
Pierce County Chambers Creek Regional WWTP	WA0039624	1,880,000	001
Post Point WWTP (Bellingham STP)	WA0023744	993,000	001
Tacoma Central No. 1 WWTP ⁴	WA0037087	2,410,000	001

Table 6. Bubbled Action Levels for Corrective Action Assessment

Jurisdiction	Bubbled Action Level, TIN lbs/year
King County	15,820,000

C. NITROGEN OPTIMIZATION PLAN AND REPORT

Each Permittee listed in Table 5 must develop, implement and maintain a Nitrogen Optimization Plan to evaluate operational strategies for maximizing nitrogen removal from the existing treatment plant to stay below the calculated action level. Each Permittee must document their actions taken, any action level exceedances, and apply an adaptive management approach at the WWTP. Permittees will quantify results with required monitoring under this Permit.

The Permittee must begin the actions described in this section immediately upon permit coverage. Documentation of Nitrogen Optimization Plan implementation must be submitted annually through the Annual Report (S9- Reporting Requirements). See Appendix C for Annual Report questions that satisfy the Nitrogen Optimization Plan requirements.

The Nitrogen Optimization Plan submitted by each Permittee in Table 5 must include the following components:

1. Treatment Process Performance Assessment

Assess the nitrogen removal potential of the current treatment process and identify viable optimization strategies prior to implementation.

- a. *Treatment Assessment* Develop a method to evaluate potential optimization approaches for the existing treatment process. Use the evaluation to:
 - i. Determine current (pre-optimization) process performance to determine the existing TIN removal performance for the WWTP.
 - ii. Create a list of potential optimization strategies capable of meeting the action level at the WWTP prior to starting optimization. Update the assessment and list of options as necessary with each Annual Report.

- b. *Identify and evaluate optimization strategies.* From the list developed in S4.C.1.a.ii, identify viable optimization strategies for each WWTP owned and operated by the Permittee. Prioritize and update this list as necessary to continuously maintain a working set of strategies for meeting the action level with the existing treatment processes.

The Permittee may exclude any optimization strategy from the initial list created in S4.C.a.ii that was considered but found to exceed a reasonable implementation cost or timeframe. Documentation must include an explanation of the rationale and financial criteria used in the exclusion determination. If the Permittee finds no viable optimization strategies exist

for their current treatment processes, they must immediately proceed to the identification of a corrective action under S4.D.

- c. *Initial Selection.* **As soon as possible and no later than July 1, 2022**, select at least one optimization strategy for implementation.

Document the expected performance (i.e., % TIN removal or a calculated reduction in effluent load or concentration) for the initial optimization strategy prior to implementation.

2. Optimization Implementation

All Permittees in Table 5 must document implementation of the selected optimization strategy (from S4.C.1.c) during the first reporting period in the first Annual Report due March 31, 2023. Permittees must document implementation during every reporting period thereafter. The documentation must include:

- a. *Strategy Implementation.* Describe how the permittee implemented the selected strategy during each reporting period, following permit coverage. Including:
 - i. Initial implementation costs
 - ii. Length of time for full implementation, including start date.
 - iii. Any adaptive management applied to refine implementation during the reporting period.
 - iv. Anticipated and unanticipated challenges.
 - v. Any impacts to the overall treatment performance as a result of process changes.
- b. *Discharge Evaluation.* By March 31 each year beginning in 2023, each Permittee in Table 5 must review effluent data collected during the previous calendar year to determine whether TIN loads are increasing.
 - i. Using all accredited monitoring data, determine facility's annual average TIN concentration and load from the reporting period. **If the annual TIN load exceeds the Action Level in Table 5 (or the applicable bubbled Action Level in Table 6) take the corrective actions in S4.D.**
 - ii. Determine the treatment plant's TIN removal rate observed during the reporting period.

3. Influent Nitrogen Reduction Measures/Source Control

Permittees in Table 5 must investigate opportunities to reduce influent TIN loads from septage handling practices, commercial, dense residential and industrial sources and submit documentation with the Annual Report. The investigation must:

- a. Review non-residential sources of nitrogen and identify any possible pretreatment opportunities.
- b. Identify potential strategies for reducing TIN from new multi-family/dense residential developments and commercial buildings.

D. ACTION LEVEL EXCEEDANCE CORRECTIVE ACTIONS

Permittees in Table 5 must evaluate whether or not they exceeded the facility specific action level or the bubbled action level (as applicable) and, if they did, implement corrective actions while continuing optimization.

1. If the Permittee determines in the Annual Report that they have exceeded their action level, they must:
 - a. Identify possible factors that caused the action level exceedance.
 - b. Identify whether modifications to the optimization strategy can improve performance.
 - c. Assess whether a different strategy or combination of strategies may provide better overall process improvements.
 - d. Document changes made to the optimization strategy, if any, while completing corrective action requirements.
 - i. Provide a detailed description of the modified or new optimization strategy selected from the list developed in S4.C.1.b. Include an implementation schedule for any changes and, as necessary, use the treatment process assessment developed to evaluate anticipated results.
 - ii. If the Permittee proposes no changes to the optimization strategy, they must provide reasons for not making changes.
2. With the next Annual Report, submit for review a proposed approach to reduce the annual effluent load by at least 10% below the action level listed in Table 5 for individual plants or Table 6 for multiple plants under a bubbled action level. This must be an abbreviated engineering report or technical memo, unless Ecology has previously approved a design document with the proposed solution. The proposed approach must utilize solutions that can be implemented as soon as possible. This may include influent load reduction strategies identified in S4.C.3.

The engineering document must include:

- i. Brief summary of the treatment alternatives considered and why the proposed approach was selected. Include cost estimates for operation and maintenance;
- ii. The basic design information, including influent characterization;
- iii. A description of the proposed treatment approach and operation, including updates to the WWTP's process flow diagram;

- iv. Anticipated results from the proposed approach including expected effluent quality;
- v. Certification by a licensed professional engineer.
- a. If a Permittee exceeds an action level two years in a row, or for a third year during the permit term, the Permittee must begin to reduce nitrogen loads by implementing the proposed approach submitted per S4.D.2 following Ecology's written approval of the proposed approach and implementation schedule.
- b. Submit an update to the Permittee's Operation and Maintenance Manual no later than 6 months following implementation.

E. NUTRIENT REDUCTION EVALUATION

1. All permittees in Table 5, except for those who meet the exclusions listed in this paragraph, must prepare and submit an approvable Nutrient Reduction Evaluation (NRE) to Ecology for review by December 31, 2025. Permittees with multiple plants may submit a combined report. This combined report must include an evaluation for all plants owned and operated by the jurisdiction. Permittees that maintain an annual TIN average of < 10 mg/L and meet their action level throughout the permit term must submit a truncated NRE that satisfies S4.E.3-S4.E.5. Permittees that meet their action level throughout the permit term, maintain an annual average of < 10 mg/L TIN and a seasonal average of < 3 mg/L do not have to submit the NRE.
2. The NRE must include an all known, available and reasonable treatment (**AKART**) analysis for purposes of evaluating reasonable treatment alternatives capable of reducing total inorganic nitrogen (TIN). It must present an alternative representing the greatest TIN reduction that is reasonably feasible on an annual basis.
3. In addition, the NRE must assess other site-specific main stream treatment plant upgrades, the applicability of side stream treatment opportunities, alternative effluent management options (e.g., disposal to ground, reclaimed water beneficial uses), the viability of satellite treatment, and other nutrient reduction opportunities that could achieve a final effluent concentration of 3 mg/L TIN (or equivalent load reduction) on seasonal average (April – October) basis.

4. The analysis must be sufficiently complete that an engineering report may be developed for the preferred AKART alternative as well as the preferred alternatives to reach 3 mg/L TIN seasonally, without substantial alterations of concept or basic considerations. The final report must contain appropriate requirements as described in the following guidance (or most recent version):
 - a. [The Criteria for Sewage Works Design \(ECY Publication No. 98-37, 2019\)](#)³
 - b. [Reclaimed Water Facilities Manual: The Purple Book \(ECY Publication No. 15-10-024, 2019\)](#)⁴
5. The analysis conducted for the NRE must include the following elements:
 - a. Wastewater Characterization
 - i. Current flowrates and growth trends within the sewer service area.
 - ii. Current influent and effluent quality.
 - b. Treatment Technology Analysis
 - i. Description of current treatment processes, including any modifications made for optimization or due to corrective actions.
 - ii. Description of site limitations, constraints, or other treatment implementation challenges that exist.
 - iii. Identification and screening of potential treatment technologies for meeting two different levels of treatment:
 1. AKART for nitrogen removal (annual basis), and
 2. 3 mg/L TIN (or equivalent load), as a seasonal average April - October
 - c. Economic Evaluation
 - i. Develop capital, operation and maintenance costs and 20 year net present value using the real discount rate in the most current [Appendix C to Office of Management and Budget Circular No. A-94](#)⁵ for each technology alternative evaluated.
 - ii. Provide cost per pound of nitrogen removed.
 - iii. Provide details on basis for current wastewater utility rate structure, including:
 1. How utilities allocate and recover costs from customers.

³ <https://apps.ecology.wa.gov/publications/summarypages/9837.html>

⁴ <https://apps.ecology.wa.gov/publications/SummaryPages/1510024.html>

⁵ https://www.whitehouse.gov/wp-content/uploads/2020/12/2020_Appendix-C.pdf

2. How frequently rate structures are reviewed.
 3. The last time rates were adjusted and the reason for that adjustment.
- iv. Provide impact to current rate structure for each alternative assessed.
- d. Environmental Justice (EJ) Review
- i. Evaluate the demographics within the sewer service area to identify communities of color, Tribes, indigenous communities, and low income populations.
 - ii. Identify areas within service area that exceed the median household income.
 - iii. Include an affordability assessment to identify how much overburdened communities identified in S4.E.5.d.i can afford to pay for the wastewater utility.
 - iv. Propose alternative rate structures or measures that can be taken to prevent adverse effects of rate increases on populations with economic hardship identified in S4.E.5.d.i.
 - v. Provide information on how recreational and commercial opportunities may be improved for communities identified in S4.E.5.d.i as a result of the treatment improvements identified.
- e. Selection of the most reasonable treatment alternative based on the AKART assessment; and the selected alternative for achieving an effluent concentration of 3 mg/L TIN (or equivalent load reduction) based on an April – October seasonal average.
- f. Viable implementation timelines that include funding, design, and construction for meeting both the AKART and seasonal average 3 mg/L TIN preferred alternatives.

S5. NARRATIVE EFFLUENT LIMITS FOR WWTPS WITH MODERATE TIN LOADS

A. APPLICABILITY AND NARRATIVE EFFLUENT LIMITS

Beginning on the effective date, each of the Permittees with moderate TIN loads listed in Table 8 may discharge TIN from the WWTP through the designated **outfall(s)** described in its individual NPDES permit. See Table 3 in Section S1.A for the load category assignment.

All discharges and activities authorized by this permit must comply with the terms and conditions of this permit. Each Permittee listed in Table 8 must comply with the facility specific or bubbled **action levels** and narrative effluent limits listed in Table 7, which constitute the suite of **best management practices** (BMPs) required for a water quality based effluent limit under 40 CFR 122.44(k).

Table 7. Narrative Effluent Limits for Moderate TIN Loaders

Parameter	Narrative Effluent Limit
Monitoring	Monitor and report per the requirements in S7.B.
Nitrogen Optimization Plan	Optimize treatment performance to stay below the action level. Submit Optimization Report annually per the requirements in S5.C
Nutrient Reduction Evaluation	Submit Nutrient Reduction Evaluation per the requirements in S5.E

B. TIN ACTION LEVELS

If the action level listed in Table 8 for individual WWTPs or the bubbled action levels listed for single jurisdictions in Table 9 are exceeded, the Permittee must employ corrective actions identified in S5.D.

The annual Action Level is the sum of monthly nutrient loads measured over one year. Ecology will assess this total once per year based on the Permittee’s Annual Report.

Table 8. Moderate WWTPs and Total Inorganic Nitrogen Action Levels

Wastewater Treatment Plant	Individual NPDES Permit Number	Action Level, TIN lbs/year	Outfall Number
Anacortes WWTP	WA0020257	167,000	001
Birch Bay Sewage Treatment Plant (STP)	WA0029556	66,400	001
Blaine STP (Lighthouse Point WRF)	WA0022641	18,200	001
Bremerton WWTP	WA0029289	602,000	001
Kitsap County Central Kitsap WWTP	WA0030520	306,000	001
Edmonds STP	WA0024058	432,000	001
Lake Stevens Sewer District WWTP	WA0020893	127,000	002
Lakota WWTP ¹	WA0022624	597,000	001

Wastewater Treatment Plant	Individual NPDES Permit Number	Action Level, TIN lbs/year	Outfall Number
LOTT Budd Inlet WWTF	WA0037061	338,000	001
Lynnwood STP	WA0024031	340,000	001
Marysville STP	WA0022497	592,000	100/001
Midway Sewer District WWTP	WA0020958	625,500	001
Miller Creek WWTP ²	WA0022764	297,000	001
Mt Vernon WWTP	WA0024074	396,000	004
Port Angeles WWTP	WA0023973	177,000	001/002
Port Orchard WWTP (South Kitsap WRF)	WA0020346	215,000	001
Redondo WWTP ¹	WA0023451	249,000	001
Salmon Creek WWTP ²	WA0022772	199,000	001
Snohomish STP	WA0029548	83,600	001
Tacoma North No. 3 WWTP	WA0037214	339,000	001

Table 9. Bubbled Action Levels for Corrective Action Assessment

Jurisdiction	Bubbled Action Level, TIN lbs/year
Lakehaven Water and Sewer District ¹	846,000
Southwest Suburban Sewer District ²	496,000

C. NITROGEN OPTIMIZATION PLAN AND REPORT

Each Permittee listed in Table 8 must develop, implement and maintain a Nitrogen Optimization Plan to evaluate operational strategies for maximizing nitrogen removal from the existing treatment plant to stay below the calculated action level. Each Permittee must document their actions taken, any action level exceedances, and apply an adaptive management approach at the WWTP. Permittees will quantify results with required monitoring under this Permit.

The Permittee must begin the actions described in this section immediately upon permit coverage. Documentation of Nitrogen Optimization Plan implementation must be submitted annually through the Annual Report (S9- Reporting Requirements). See Appendix D for annual report questions that satisfy the Nitrogen Optimization Plan requirements.

The Nitrogen Optimization Plan submitted by each Permittee in Table 8 must include the following components:

1. Treatment Process Performance Assessment

Assess the nitrogen removal potential of the current treatment process and identify viable optimization strategies prior to implementation.

- a. *Treatment Assessment.* Develop a method to evaluate potential optimization approaches for the existing treatment process. Use the evaluation to:
 - i. Evaluate current (pre-optimization) process performance to determine the existing TIN removal performance for the WWTP.
 - ii. Create a list of potential optimization strategies capable of meeting the action level at the WWTP prior to starting optimization. Update the assessment and list of options as necessary with each Annual Report.
- b. *Identify and evaluate optimization strategies.* From the list developed in S5.C.1.a.ii, identify viable optimization strategies for each WWTP owned and operated by the Permittee. Prioritize and update this list as necessary to continuously maintain a working set of strategies for meeting the action level with the existing treatment processes.

The Permittee may exclude any optimization strategy from the initial list created in S5.C.a.ii that was considered but found to exceed a reasonable implementation cost or timeframe. Documentation must include an explanation of the rationale and financial criteria used in the exclusion determination. If the Permittee finds no viable optimization strategies exist for their current treatment processes, they must immediately proceed to the identification of a corrective action under S5.D.

- c. *Initial Selection.* **As soon as possible and no later than July 1, 2022** select at least one optimization strategy for implementation.

Document the expected performance (i.e., % TIN removal or a calculated reduction in effluent load or concentration) for the initial optimization strategy prior to implementation.

2. Optimization Implementation

All Permittees in Table 8 must document implementation of the selected optimization strategy (from S5.C.1.c) during the first reporting period in the first Annual Report due March 31, 2023. Permittees must document implementation during every reporting period thereafter. The documentation must include:

- a. *Strategy Implementation.* Describe how the permittee implemented the selected strategy during each reporting period, following permit coverage. Including:
 - i. Initial implementation costs
 - ii. Length of time for full implementation, including start date.

- iii. Any adaptive management applied to refine implementation during the reporting period.
 - iv. Anticipated and unanticipated challenges.
 - v. Any impacts to the overall treatment performance as a result of process changes.
- b. *Discharge Evaluation.* By March 31 each year beginning in 2023, each Permittee in Table 8 must review effluent data collected during the previous calendar year to determine whether TIN loads are increasing.
- i. Using all accredited monitoring data, determine facility's annual average TIN concentration and load from the reporting period. **If the annual TIN load exceeds the Action Level in Table 8 (or the applicable bubbled Action Level in Table 9) take the corrective actions in S5.D.**
 - ii. Determine the treatment plant's TIN removal rate observed during the reporting period.
3. Influent Nitrogen Reduction Measures/Source Control
- Permittees in Table 8 must investigate opportunities to reduce influent TIN loads from septage handling practices, commercial, dense residential and industrial sources and submit documentation with the Annual Report. The investigation must:
- a. Review non-residential sources of nitrogen and identify any possible pretreatment opportunities.
 - b. Identify potential strategies for reducing TIN from new multi-family/dense residential developments and commercial buildings.

D. ACTION LEVEL EXCEEDANCE CORRECTIVE ACTIONS

Permittees in Table 8 must evaluate whether or not they exceeded the facility specific action level or the bubbled action level (as applicable) and, if they did, implement corrective actions while continuing optimization.

- 1. If the Permittee determines in the Annual Report that they have exceeded their action level, they must:
 - a. Identify possible factors that caused the action level exceedance.
 - b. Identify whether modifications to the optimization strategy can improve performance.
 - c. Assess whether a different strategy or combination of strategies may provide better overall process improvements.
 - d. Document changes made to the optimization strategy, if any, while completing corrective action requirements.

- i. Provide a detailed description of the modified or new optimization strategy selected from the list developed in S5.C.1.b. Include an implementation schedule for any changes and, as necessary, use the treatment process assessment developed to evaluate anticipated results.
 - ii. If the Permittee proposes no changes to the optimization strategy, they must provide reasons for not making changes.
2. With the next Annual Report, submit for review a proposed approach to reduce the annual effluent load below the action level listed in either Table 8 or Table 9 (as applicable for those jurisdictions) for the duration of the permit term. This must be an abbreviated engineering report or technical memo, unless Ecology has previously approved a design document with the proposed solution. The proposed approach must utilize solutions that can be implemented as soon as possible. This may include influent load reduction strategies identified in S5.C.3.

The engineering document must include:

- i. Brief summary of the treatment alternatives considered and why the proposed approach was selected. Include cost estimates for operation and maintenance;
 - ii. The basic design information, including influent characterization;
 - iii. A description of the proposed treatment approach and operation, including updates to the WWTP's process flow diagram;
 - iv. Anticipated results from the proposed approach including expected effluent quality;
 - v. Certification by a licensed professional engineer.
- b. If a Permittee exceeds an action level two years in a row, or for a third year during the permit term, the Permittee must begin to reduce nitrogen loads by implementing the proposed approach submitted per S5.D.2 following Ecology's written approval of the proposed approach and implementation schedule.
- c. Submit an update to the Permittee's Operation and Maintenance Manual no later than 6 months following implementation.

E. NUTRIENT REDUCTION EVALUATION

1. Permittees in Table 8, except for those who meet the exclusions listed in this paragraph, must prepare and submit an approvable Nutrient Reduction Evaluation (NRE) to Ecology for review by December 31, 2025. Permittees with multiple plants may submit a combined report. This combined report must include an evaluation for all plants owned and operated by the jurisdiction. Permittees that maintain an annual TIN average of < 10 mg/L and meet their action level throughout the permit term must submit a truncated NRE that satisfies S5.E.3-S5.E.5. Permittees that meet their action level throughout the permit term, maintain an annual average of < 10 mg/L TIN and a seasonal average of < 3 mg/L do not have to submit the NRE.
2. The NRE must include an all known, available and reasonable treatment (**AKART**) analysis for purposes of evaluating reasonable treatment alternatives capable of reducing total inorganic nitrogen (TIN). It must present an alternative representing the greatest TIN reduction that is reasonably feasible on an annual basis.
3. In addition, the NRE must assess other site- specific main stream treatment plant upgrades, the applicability of side stream treatment opportunities, alternative effluent management options (e.g., disposal to ground, reclaimed water beneficial uses), the viability of satellite treatment, and other nutrient reduction opportunities that could achieve a final effluent concentration of 3 mg/L TIN (or equivalent load reduction) on seasonal average (April – October) basis.
4. The analysis must be sufficiently complete that an engineering report may be developed for the preferred AKART alternative as well as the preferred alternatives to reach 3 mg/L TIN seasonally, without substantial alterations of concept or basic considerations. The final report must contain appropriate requirements as described in the following guidance (or most recent version):
 - a. [The Criteria for Sewage Works Design \(ECY Publication No. 98-37, 2019\)](#)⁶
 - b. [Reclaimed Water Facilities Manual: The Purple Book \(ECY Publication No. 15-10-024, 2019\)](#)⁷
5. The analysis conducted for the NRE must include the following elements:
 - a. Wastewater Characterization
 - i. Current flowrates and growth trends within the sewer service area.
 - ii. Current influent and effluent quality.
 - b. Treatment Technology Analysis

⁶ <https://apps.ecology.wa.gov/publications/summarypages/9837.html>

⁷ <https://apps.ecology.wa.gov/publications/SummaryPages/1510024.html>

- i. Description of current treatment processes, including any modifications made for optimization or due to corrective actions.
 - ii. Description of site limitations, constraints, or other treatment implementation challenges that exist.
 - iii. Identification and screening of potential treatment technologies for meeting two different levels of treatment:
 - 1. AKART for nitrogen removal (annual basis), and
 - 2. 3 mg/L TIN (or equivalent load), as a seasonal average (April through October)
- c. Economic Evaluation
- i. Develop capital, operation and maintenance costs and 20 year net present value using the real discount rate in the most current [Appendix C to Office of Management and Budget Circular No. A-94](#)⁸ for each technology alternative evaluated.
 - ii. Provide cost per pound of nitrogen removed.
 - iii. Provide details on basis for current wastewater utility rate structure, including:
 - 1. How utilities allocate and recover costs from customers.
 - 2. How frequently rate structures are reviewed.
 - 3. The last time rates were adjusted and the reason for that adjustment.
 - iv. Provide impact to current rate structure for each alternative assessed.
- d. Environmental Justice (EJ) Review
- i. Evaluate the demographics within the sewer service area to identify communities of color, Tribes, indigenous communities, and low income populations.
 - ii. Identify areas within service area that exceed the median household income.
 - iii. Include an affordability assessment to identify how much overburdened communities identified in S5.E.5.d.i can afford to pay for the wastewater utility.
 - iv. Propose alternative rate structures or measures that can be taken to prevent adverse effects of rate increases on populations with economic hardship identified in S5.E.5.d.i.

⁸ https://www.whitehouse.gov/wp-content/uploads/2020/12/2020_Appendix-C.pdf

- v. Provide information on how recreational and commercial opportunities may be improved for communities identified in S5.E.5.d.i as a result of the treatment improvements identified.
- e. Selection of the most reasonable treatment alternative based on the AKART assessment; and the selected alternative for achieving an effluent concentration of 3 mg/L TIN (or equivalent load reduction) based on an April through October seasonal average.
- f. Viable implementation timelines that include funding, design, and construction for meeting both the AKART and seasonal average 3 mg/L TIN preferred alternatives.

S6. NARRATIVE EFFLUENT LIMITS FOR WWTPS WITH SMALL TIN LOADS

A. APPLICABILITY AND NARRATIVE EFFLUENT LIMITS

Beginning on the effective date, each of the Permittees with small TIN loads listed in Table 11 may discharge total inorganic nitrogen from the WWTP through each facility’s designated outfall. See Table 3 in Section S1.A for the load category assignment.

All discharges and activities authorized by this permit must comply with the terms and conditions of this permit. Each Permittee listed in Table 11 must comply with the narrative effluent limits listed in Table 10 which constitute the suite of BMPs required for a narrative water quality based effluent limit under 40 CFR 122.44(k).

Table 10. Narrative Effluent Limits for WWTPs with Small TIN Loads

Parameter	Narrative Effluent Limit
Monitoring	Monitor and report per the requirements in S7.C.
Nitrogen Optimization Plan	Submit one Optimization Report per the requirements in S6.B
AKART Analysis	Submit an AKART Analysis per the requirements in S6.C

Table 11. Permittees with Small TIN Loads

Wastewater Treatment Plant	Individual NPDES Permit Number	Outfall Number
Alderwood STP	WA0020826	001
Bainbridge Island WWTP	WA0020907	001
Boston Harbor STP	WA0040291	001
Clallam Bay STP	WA0024431	001
Clallam Bay Corrections Center STP	WA0039845	001
Coupeville STP	WA0029378	001
Eastsound Orcas Village WWTP	WA0030911	001
Eastsound Sewer and Water District WWTP	WA0030571	001
Fisherman Bay STP	WA0030589	001
Friday Harbor STP	WA0023582	001
Gig Harbor WWTP	WA0023957	001
Hartstene Pointe STP	WA0038377	001
King County Vashon WWTP	WA0022527	001
Kitsap County Kingston WWTP	WA0032077	001
Kitsap County Manchester WWTP	WA0023701	001
Kitsap County Sewer District #7 Water Reclamation Facility (WRF)	WA0030317	001
La Conner STP	WA0022446	001
Langley WWTP	WA0020702	001
McNeil Island Special Commitment Center WWTP	WA0040002	001
Mukilteo Water and Wastewater District WWTP	WA0023396	001
Oak Harbor STP	WA0020567	003
Penn Cove WWTP	WA0029386	001
Port Townsend STP	WA0037052	001
Rustlewood STP	WA0038075	001
Sekiu WWTP	WA0024449	001
Sequim WRF	WA0022349	001
Shelton WWTP	WA0023345	001

Wastewater Treatment Plant	Individual NPDES Permit Number	Outfall Number
Skagit County Sewer District 2 Big Lake WWTP	WA0030597	001
Stanwood STP	WA0020290	001
Tamoshan STP	WA0037290	001
WA Parks Larrabee WWTP	WA0023787	001

B. NITROGEN OPTIMIZATION PLAN AND REPORT

Each Permittee listed in Table 11 must develop, implement, and maintain a Nitrogen Optimization Plan to evaluate and implement operational strategies for maximizing nitrogen removal from the existing treatment plant during the permit term. Permittees must document their actions taken and apply an adaptive management approach at the WWTP. Permittees will quantify results with required monitoring under this Permit.

The Permittee must begin the actions described in this section immediately upon permit coverage. Documentation of Nitrogen Optimization Plan implementation must be submitted through the Single Report (S9- Reporting Requirements). See Appendix E for report questions that satisfy the Nitrogen Optimization Plan requirements. This report must be submitted by March 31, 2026.

The Nitrogen Optimization Plan submitted by each Permittee in Table 11 must include the following components:

1. Treatment Process Performance Assessment

Each Permittee listed in Table 11 must assess the nitrogen removal potential of the current treatment process and have the ability to evaluate optimization strategies prior to implementation.

- a. *Evaluation.* Each Permittee in Table 11 must develop a treatment process assessment method for purposes of evaluating optimization approaches during the permit term.
 - i. Evaluate current (pre-optimization) process performance. Determine the empirical TIN removal rate for the WWTP.
 - ii. Develop an initial assessment approach to evaluate possible optimization strategies at the WWTP prior to and after implementation.
 - iii. Determine the optimization goal for the WWTP. Develop and document a prioritized list of optimization strategies capable of achieving the optimization goal for each WWTP owned and operated by the Permittee. Update this list as necessary to continuously maintain a selection of strategies for achieving each optimization goal identified.

- iv. The Permittee may exclude from the initial selection any optimization strategy considered but found to exceed a reasonable implementation cost or timeframe. Documentation must include an explanation of the rationale and financial criteria used for the exclusion determination.
- b. *Initial Selection.* **By December 31, 2022** identify the optimization strategy selected for implementation.

Document the expected % TIN removal (or the expected reduction in effluent load) for the optimization strategy prior to implementation.

2. Optimization Implementation

Permittees in Table 11 must document implementation of the selected optimization strategy (from S6.B.1.b) as it is applied to the existing treatment process during the reporting period. Permittees must document adaptive management applied to optimization strategies following initial implementation through the permit term.

- a. *Strategy Implementation.* Describe how the selected strategy was implemented during the reporting period, following permit coverage. Including:
 - i. Initial implementation costs.
 - ii. Length of time for full implementation, including start date.
 - iii. Anticipated and unanticipated challenges.
 - iv. Any impacts to the overall treatment performance as a result of process changes.
- b. *Load Evaluation.* Each Permittee listed in Table 11 must review effluent data collected during the reporting period to determine whether TIN loads are increasing.
 - i. Using all accredited monitoring data, determine the facility's annual average TIN concentration and load for each year during the reporting period.
 - ii. Determine the treatment plant's TIN removal rate at the end of each year. Compare the removal rate with the pre-optimization rate identified in S6.B.1.a.i.
- c. *Strategy Assessment.* Quantify the results of the implemented strategy and compare to the performance metric identified in S6.B.1.b.

If the TIN loading increased, apply adaptive management, re-evaluate the optimization strategies and the resulting performance to identify the reason. Select a new optimization strategy for implementation and/or revise implementation for better performance. Document any updates to the implementation schedule and overall plan.

3. Influent Nitrogen Reduction Measures/Source Control

Permittees in Table 11 must investigate opportunities to reduce influent TIN loads from septage handling practices, commercial, dense residential and industrial sources and submit documentation with the Annual Report. The investigation must:

- a. Review non-residential sources of nitrogen and identify any possible pretreatment opportunities.
- b. Identify strategies for reducing TIN from new multi-family/dense residential developments and commercial buildings.

C. AKART ANALYSIS

1. Permittees in Table 11, except for those who meet the exclusions listed in this paragraph, must prepare and submit an approvable all known, available and reasonable treatment (AKART) analysis to Ecology for purposes of evaluating reasonable treatment alternatives capable of reducing total inorganic nitrogen (TIN). Permittees must submit this report by December 31, 2025. Permittees that maintain an annual TIN average of < 10 mg/L and do not document an increase in load through their DMRs do not have to submit this analysis.
2. The analysis must contain appropriate requirements as described in the following guidance (or the most recent version):
 - a. [The Criteria for Sewage Works Design \(ECY Publication No. 98-37, 2019\)](https://apps.ecology.wa.gov/publications/documents/9837.pdf)⁹
 - b. [Reclaimed Water Facilities Manual: The Purple Book \(ECY Publication No. 15-10-024, 2019\)](https://apps.ecology.wa.gov/publications/SummaryPages/1510024.html)¹⁰
3. The AKART analysis must include the following elements:
 - a. Wastewater Characterization
 - i. Current volumes, flowrates and growth trends
 - ii. Current influent and effluent quality
 - b. Treatment Technology Analysis
 - i. Description of current treatment processes
 - ii. Identification and screening of potential treatment technologies for TIN reduction that achieves AKART for nitrogen removal
 - c. Economic Evaluation

⁹ <https://apps.ecology.wa.gov/publications/documents/9837.pdf>

¹⁰ <https://apps.ecology.wa.gov/publications/SummaryPages/1510024.html>

- i. Develop capital, operation and maintenance costs and 20 year net present value using the real discount rate in the most current [Appendix C to Office of Management and Budget Circular No. A-94](#)¹¹ for each technology alternative evaluated.
- ii. Provide cost per pound of nitrogen removed
- iii. Provide details on basis for current wastewater utility rate structure, including:
 - 1. How utilities allocate and recover costs from customers.
 - 2. How frequently rate structures are reviewed.
 - 3. The last time rates were adjusted and the reason for that adjustment.
- iv. Provide impact to current rate structure for each alternative assessed.
- d. Environmental Justice (EJ) Review
 - i. Evaluate the demographics within the sewer service area to identify communities of color, Tribes, indigenous communities, and low income populations.
 - ii. Identify areas within the service area that exceed the median household income.
 - iii. Include an affordability assessment to identify how much overburdened communities identified in S6.C.3.d.i can afford to pay for the wastewater utility.
 - iv. Propose alternative rate structures or measures that can be taken to prevent adverse effects of rate increases on populations with economic hardship identified in S6.C.3.d.i.
 - v. Provide information on how recreation and commercial opportunities may be improved for communities identified in S6.C.3.d.i as a result of the treatment improvements identified.
- e. Selection of most reasonable treatment alternative.
- f. Attainable implementation schedule that includes funding, design and construction of infrastructure improvement capable of achieving and maintaining AKART.

¹¹ https://www.whitehouse.gov/wp-content/uploads/2020/12/2020_Appendix-C.pdf

S7. MONITORING SCHEDULES AND SAMPLING REQUIREMENTS

A. MONITORING REQUIREMENTS FOR DOMINANT LOADERS

Each permittee listed in Table 5 must monitor influent and effluent in accordance with the following schedule and requirements specified in Table 12 and 13, respectively. Influent and effluent monitoring locations must be representative. Permittees may use the monitoring locations identified in their individual NPDES permit. If a Permittee conducts additional sampling of required parameters during the month, they must report all results on the monthly DMR.

Table 12. Influent Sampling Requirements for Dominant Loaders

Wastewater influent means the raw sewage flow from the collection system into the treatment facility. Sample the wastewater entering the headworks of the treatment plant excluding any side-stream returns from inside the plant, if possible.

The Permittee must collect total ammonia, nitrate plus nitrite, and TKN samples during the same sampling event.

Parameter	Units & Specifications	Minimum Sampling or Calculation Frequency	Analytical Method ^k	Laboratory Quantitation Level ^l	Sample Type
CBOD ₅	mg/L	2/week ^b	SM5210-B	2 mg/L	24-hour composite ^e
Total Ammonia	mg/L as N	2/week ^b	SM4500-NH ₃ -B/C/D/E/F/G/H	0.02 mg/L	24-hour composite ^e
Nitrate plus Nitrite Nitrogen	mg/L as N	1/month ^c	SM4500-NO ₃ -E/F/H	0.1 mg/L	24-hour composite ^e
Total Kjeldahl Nitrogen (TKN)	mg/L as N	1/month ^c	SM4500-N _{org} -B/C and SM4500-NH ₃ -B/C/D/E/F/G/H	0.3 mg/L	24-hour composite ^e

Table 13. Effluent Sampling Requirements for Dominant Loaders

Final wastewater effluent means wastewater exiting the last treatment process or operation. Typically, this is after or at the exit from the chlorine contact chamber or other disinfection process. The total ammonia, TKN, and nitrate plus nitrite samples must be taken during the same sampling event.

Parameter	Units & Specifications	Minimum Sampling or Calculation Frequency	Analytical Method ^k	Laboratory Quantitation Level ^l	Sample Type
Flow ^f	MGD	2/week ^b	--	--	Metered/recorded
CBOD ₅ ^a	mg/L	2/week ^b	SM5210-B	2 mg/L	24-hour composite ^e
Total Organic Carbon	mg/L	1/quarter ^d	SM5310-B/C/D	1 mg/L	24-hour composite ^e
Total Ammonia	mg/L as N	2/week ^b	SM4500-NH ₃ -B/C/D/E/F/G/H	0.02 mg/L	24-hour composite ^e
Nitrate plus Nitrite Nitrogen	mg/L as N	2/week ^b	SM4500-NO ₃ -E/F/H	0.1 mg/L	24-hour composite ^e
TKN	mg/L as N	1/month ^c	SM4500-N _{org} -B/C and SM4500-NH ₃ -B/C/D/E/F/G/H	0.3 mg/L	24-hour composite ^e
Total Inorganic Nitrogen	mg/L as N	2/week ^b	--	--	Calculated ^g
Total Inorganic Nitrogen	Lbs/day	2/week ^b	--	--	Calculated ^h
Average Monthly Total Inorganic Nitrogen	Lbs	1/month ^c	--	--	Calculated ⁱ
Annual Total Inorganic Nitrogen, year to date	Lbs	1/month ^c	--	--	Calculated ^j

Table 14. Footnotes for Influent and Effluent Monitoring Tables 12 and 13

Footnote	Information
a	Take effluent samples for the CBOD ₅ analysis before or after the disinfection process. If taken after disinfection and chlorine is used, dechlorinate and reseed the sample.
b	2/week means two (2) times during each week
c	1/month means one (1) time during each month
d	Quarterly sampling periods are January through March, April through June, July through September, and October through December. The Permittee must begin quarterly monitoring for the quarter beginning on <u>1/1/22 4/1/22 7/1/22 10/1/22</u> and submit results by <u>4/15/22, 7/15/22, 10/15/22, 1/15/22</u> .
e	24-hour <i>composite</i> means a series of individual samples collected over a 24-hour period into a single container, and analyzed as one sample.
f	Report daily flows only on days when collecting total ammonia and nitrate plus nitrite samples.
g	TIN (mg/L) as N = Total Ammonia (mg/L as N) + Nitrate plus Nitrite (mg/L as N)
h	Calculate mass concurrently with the respective concentration of a sample, using the following formula: Concentration (in mg/L) X daily flow (in MGD) X Conversion Factor (8.34) = lbs/day
i	Calculate the monthly average total inorganic nitrogen load (lbs as N) using the following equation: Monthly average TIN load (lbs as N) $= \left(\left(\sum \text{Calculated TIN loads} \left(\frac{\text{lbs}}{\text{day}} \text{ as N} \right) \right) / \text{number of samples} \right) \times \text{number of days in the calendar month}$
j	Calculate the annual total inorganic nitrogen, year to date using the following calculation: $\text{Annual TIN load (lbs as N)} = \sum \text{Monthly average TIN loads, to date}$
k	Or other equivalent EPA-approved method with the same or lower quantitation level
l	The Permittee must ensure laboratory results comply with the quantitation level (QL) specified in the table. However, if an alternative method from 40 CFR Part 136 is sufficient to produce measurable results in the sample, the Permittee may use that method for analysis. If the Permittee uses an alternative method it must report the test method and QL on the discharge monitoring report. If the permittee is unable to obtain the required QL due to matrix effects, the Permittee must report the matrix-specific method detection level (MDL) and QL on the DMR. The permittee must also upload the QA/QC documentation from the lab on the QL development.

B. MONITORING REQUIREMENTS FOR MODERATE LOADERS

Each permittee listed in Table 8 must monitor influent and effluent in accordance with the following schedule and requirements specified in Table 15 and 16, respectively. Influent and effluent monitoring locations must be representative. Permittees may use the monitoring locations identified in their individual NPDES permit. If a Permittee conducts additional sampling of required parameters during the month, they must report all results on the monthly DMR.

Table 15. Influent Sampling Requirements for Moderate Loaders

Wastewater influent means the raw sewage flow from the collection system into the treatment facility. Sample the wastewater entering the headworks of the treatment plant excluding any side-stream returns from inside the plant, if possible.

The Permittee must collect total ammonia, nitrate plus nitrite, and TKN samples during the same sampling event.

Parameter	Units & Specifications	Minimum Sampling or Calculation Frequency	Analytical Method ^k	Laboratory Quantitation Level ^l	Sample Type
CBOD ₅	mg/L	1/week ^b	SM5210-B	2 mg/L	24-hour composite ^e
Total Ammonia	mg/L as N	1/week ^b	SM4500-NH ₃ -B/C/D/E/F/G/H	0.02 mg/L	24-hour composite ^e
Nitrate plus Nitrite Nitrogen	mg/L as N	1/month ^c	SM4500-NO ₃ -E/F/H	0.1 mg/L	24-hour composite ^e
Total Kjeldahl Nitrogen (TKN)	mg/L as N	1/month ^c	SM4500-N _{org} -B/C and SM4500-NH ₃ -B/C/D/E/F/G/H	0.3 mg/L	24-hour composite ^e

Table 16. Effluent Sampling Requirements for Moderate Loaders

Final wastewater effluent means wastewater exiting the last treatment process or operation. Typically, this is after or at the exit from the chlorine contact chamber or other disinfection process. The total ammonia, TKN, and nitrate plus nitrite samples must be taken during the same sampling event.

Parameter	Units & Specifications	Minimum Sampling or Calculation Frequency	Analytical Method ^k	Laboratory Quantitation Level ^l	Sample Type
Flow ^f	MGD	1/week ^b	--	--	Metered/recorded
CBOD ₅ ^a	mg/L	1/week ^b	SM5210-B	2 mg/L	24-hour composite ^e
Total Organic Carbon	mg/L	1/quarter ^c	SM5310-B/C/D	1 mg/L	24-hour composite ^e
Total Ammonia	mg/L as N	1/week ^b	SM4500-NH ₃ -B/C/D/E/F/G/H	0.02 mg/L	24-hour composite ^e
Nitrate plus Nitrite Nitrogen	mg/L as N	1/week ^b	SM4500-NO ₃ -E/F/H	0.1 mg/L	24-hour composite ^e
TKN	mg/L as N	1/month ^c	SM4500-N _{org} -B/C and SM4500-NH ₃ -B/C/D/E/F/G/H	0.3 mg/L	24-hour composite ^e
Total Inorganic Nitrogen	mg/L as N	1/week ^b	--	--	Calculated ^g
Total Inorganic Nitrogen	Lbs/day	1/week ^b	--	--	Calculated ^h
Average Monthly Total Inorganic Nitrogen	Lbs	1/month ^c	--	--	Calculated ⁱ
Annual Total Inorganic Nitrogen, year to date	Lbs	1/month ^c	--	--	Calculated ^j

Table 17. Footnotes for Influent and Effluent Monitoring Tables 15 and 16

Footnote	Information
a	Take effluent samples for the CBOD ₅ analysis before or after the disinfection process. If taken after disinfection and chlorine is used, dechlorinate and reseed the sample.
b	1/week means one (1) times during each week
c	1/month means one (1) time during each month
d	Quarterly sampling periods are January through March, April through June, July through September, and October through December. The Permittee must begin quarterly monitoring for the quarter beginning on <u>1/1/22 4/1/22 7/1/22 10/1/22</u> and submit results by <u>4/15/22, 7/15/22, 10/15/22, 1/15/22</u> .
e	24-hour <i>composite</i> means a series of individual samples collected over a 24-hour period into a single container, and analyzed as one sample.
f	Report daily flows only on days when collecting total ammonia and nitrate plus nitrite samples.
g	TIN (mg/L) as N = Total Ammonia (mg/L as N) + Nitrate plus Nitrite (mg/L as N)
h	Calculate mass concurrently with the respective concentration of a sample, using the following formula: Concentration (in mg/L) X daily flow (in MGD) X Conversion Factor (8.34) = lbs/day
i	Calculate the monthly average total inorganic nitrogen load (lbs as N) using the following equation: Monthly average TIN load (lbs as N) $= \left(\left(\sum \text{Calculated TIN loads} \left(\frac{\text{lbs}}{\text{day}} \text{ as N} \right) \right) / \text{number of samples} \right) \times \text{number of days in the calendar month}$
j	Calculate the annual total inorganic nitrogen, year to date using the following calculation: $\text{Annual TIN load (lbs as N)} = \sum \text{Monthly average TIN loads, to date}$
k	Or other equivalent EPA-approved method with the same or lower quantitation level
l	The Permittee must ensure laboratory results comply with the quantitation level (QL) specified in the table. However, if an alternative method from 40 CFR Part 136 is sufficient to produce measurable results in the sample, the Permittee may use that method for analysis. If the Permittee uses an alternative method it must report the test method and QL on the discharge monitoring report. If the permittee is unable to obtain the required QL due to matrix effects, the Permittee must report the matrix-specific method detection level (MDL) and QL on the DMR. The permittee must also upload the QA/QC documentation from the lab on the QL development.

C. MONITORING REQUIREMENTS FOR SMALL LOADERS

Each permittee listed in Table 11 must monitor influent and effluent in accordance with the following schedule and requirements specified in Table 18 and 19, respectively. Influent and effluent monitoring locations must be representative. Permittees may use the monitoring locations identified in their individual NPDES permit. If a Permittee conducts additional sampling of required parameters during the month, they must report all results on the monthly DMR.

Table 18. Influent Sampling Requirements for Small Loaders

Wastewater influent means the raw sewage flow from the collection system into the treatment facility. Sample the wastewater entering the headworks of the treatment plant excluding any side-stream returns from inside the plant, if possible.

The Permittee must collect total ammonia, nitrate plus nitrite, and TKN samples during the same sampling event.

Parameter	Units & Specifications	Minimum Sampling or Calculation Frequency	Analytical Method ^j	Laboratory Quantitation Level ^k	Sample Type
CBOD ₅	mg/L	2/month ^c	SM5210-B	2 mg/L	24-hour composite ^e
Total Ammonia	mg/L as N	2/month ^c	SM4500-NH ₃ -B/C/D/E/F/G/H	0.02 mg/L	24-hour composite ^e
Nitrate plus Nitrite Nitrogen	mg/L as N	1/month ^b	SM4500-NO ₃ -E/F/H	0.1 mg/L	24-hour composite ^e
Total Kjeldahl Nitrogen (TKN)	mg/L as N	1/month ^b	SM4500-N _{org} -B/C and SM4500-NH ₃ -B/C/D/E/F/G/H	0.3 mg/L	24-hour composite ^e

Table 19. Effluent Sampling Requirements for Small Loaders

Final wastewater effluent means wastewater exiting the last treatment process or operation. Typically, this is after or at the exit from the chlorine contact chamber or other disinfection process. The total ammonia, TKN, and nitrate plus nitrite samples must be taken during the same sampling event.

Parameter	Units & Specifications	Minimum Sampling or Calculation Frequency	Analytical Method ^k	Laboratory Quantitation Level ^l	Sample Type
Flow ^f	MGD	2/month ^c	--	--	Metered/recorded
CBOD ₅ ^a	mg/L	2/month ^c	SM5210-B	2 mg/L	24-hour composite ^e
Total Organic Carbon	mg/L	1/quarter ^d	SM5310-B/C/D	1 mg/L	24-hour composite ^e
Total Ammonia	mg/L as N	2/month ^c	SM4500-NH ₃ -B/C/D/E/F/G/H	0.02 mg/L	24-hour composite ^e
Nitrate plus Nitrite Nitrogen	mg/L as N	2/month ^c	SM4500-NO ₃ -E/F/H	0.1 mg/L	24-hour composite ^e
TKN	mg/L as N	1/month ^b	SM4500-N _{org} -B/C and SM4500-NH ₃ -B/C/D/E/F/G/H	0.3 mg/L	24-hour composite ^e
Total Inorganic Nitrogen	mg/L as N	2/month ^c	--	--	Calculated ^g
Total Inorganic Nitrogen	Lbs/day	2/month ^c	--	--	Calculated ^h
Average Monthly Total Inorganic Nitrogen	Lbs	1/month ^b	--	--	Calculated ⁱ
Annual Total Inorganic Nitrogen, year to date	Lbs	1/month ^b	--	--	Calculated ^j

Table 20. Footnotes for Influent and Effluent Monitoring Tables 18 and 19

Footnote	Information
a	Take effluent samples for the CBOD ₅ analysis before or after the disinfection process. If taken after disinfection and chlorine is used, dechlorinate and reseed the sample.
b	1/month means one (1) time during each month
c	2/month means two (2) times during each month and on a rotational basis throughout the days of the week, except weekends and holidays.
d	Quarterly sampling periods are January through March, April through June, July through September, and October through December. The Permittee must begin quarterly monitoring for the quarter beginning on <u>1/1/22</u> <u>4/1/22</u> <u>7/1/22</u> <u>10/1/22</u> and submit results by <u>4/15/22</u> , <u>7/15/22</u> , <u>10/15/22</u> , <u>1/15/22</u> .
e	24-hour composite means a series of individual samples collected over a 24-hour period into a single container, and analyzed as one sample.
f	Report daily flows only on days when collecting total ammonia and nitrate plus nitrite samples.
g	TIN (mg/L) as N = Total Ammonia (mg/L as N) + Nitrate plus Nitrite (mg/L as N)
h	Calculate mass concurrently with the respective concentration of a sample, using the following formula: Concentration (in mg/L) X daily flow (in MGD) X Conversion Factor (8.34) = lbs/day
i	Calculate the monthly average total inorganic nitrogen load (lbs as N) using the following equation: Monthly average TIN load (lbs as N) $= \left(\left(\sum \text{Calculated TIN loads} \left(\frac{\text{lbs}}{\text{day}} \text{ as } N \right) \right) / \text{number of samples} \right) \times \text{number of days in the calendar month}$
j	Calculate the annual total inorganic nitrogen, year to date using the following calculation: $\text{Annual TIN load (lbs as N)} = \sum \text{Monthly average TIN loads, to date}$
k	Or other equivalent EPA-approved method with the same or lower quantitation level
l	The Permittee must ensure laboratory results comply with the quantitation level (QL) specified in the table. However, if an alternative method from 40 CFR Part 136 is sufficient to produce measurable results in the sample, the Permittee may use that method for analysis. If the Permittee uses an alternative method it must report the test method and QL on the discharge monitoring report. If the permittee is unable to obtain the required QL due to matrix effects, the Permittee must report the matrix-specific method detection level (MDL) and QL on the DMR. The permittee must also upload the QA/QC documentation from the lab on the QL development.

D. SAMPLING AND ANALYTICAL PROCEDURES

Samples and measurements taken to meet the requirements of this permit must represent the volume and nature of the monitored parameters, including **representative sampling** of any unusual discharge or discharge condition, including authorized **bypasses**, upsets, and maintenance-related conditions affecting effluent quality.

Sampling and analytical methods used to meet the monitoring requirements specified in this permit must conform to the latest revision of the [Guidelines Establishing Test Procedures for the Analysis of Pollutants](#)¹² contained in [40 CFR 136](#)¹³ (or as applicable in [40 CFR subchapter N](#)¹⁴ [Parts 400-471] or [40 CFR subchapter O](#)¹⁵ [Parts 501-503]) unless otherwise specified in this permit.

E. FLOW MEASUREMENT

The Permittee must:

1. Select and use appropriate flow measurement and method consistent with accepted scientific practices.
2. Install, calibrate, and maintain these devices to ensure the accuracy of the measurements is consistent with the accepted industry standard, the manufacture's recommendation, and approved O&M manual procedures for the device and the wastestream.
3. Establish a calibration frequency for each device or instrument in the Permittee's O&M Manual that conforms to the frequency recommended by the manufacturer.
4. Maintain calibration records for at least three years.

F. LABORATORY ACCREDITATION

1. The Permittee must ensure that all monitoring data required by Ecology for permit specified parameters is prepared by a laboratory registered or accredited under the provisions of chapter 173-50 WAC, *Accreditation of Environmental Laboratories*. Flow and internal process control parameters are exempt from this requirement.

G. REQUEST FOR REDUCTION IN MONITORING

1. The Permittee may request a reduction of the sampling frequency after twelve (12) months of monitoring by demonstrating that the distribution of

¹² <https://www.ecfr.gov/cgi-bin/text-idx?SID=0e534d17f9783994a26ffee684d260c2&mc=true&node=pt40.25.136&rgn=div5>

¹³ <https://www.ecfr.gov/cgi-bin/text-idx?SID=0e534d17f9783994a26ffee684d260c2&mc=true&node=pt40.25.136&rgn=div5>

¹⁴ <https://www.ecfr.gov/cgi-bin/text-idx?SID=0e534d17f9783994a26ffee684d260c2&mc=true&tpl=/ecfrbrowse/Title40/40CsubchapN.tpl>

¹⁵ <https://www.ecfr.gov/cgi-bin/text-idx?SID=0e534d17f9783994a26ffee684d260c2&mc=true&tpl=/ecfrbrowse/Title40/40CsubchapO.tpl>

concentrations can be accurately represented with a lower sampling frequency. Ecology will review each request and at its discretion grant the request in writing when it reissues the permit coverage or by a permit coverage modification.

2. The Permittee must:
 - a. Provide a written request.
 - b. Clearly state the parameters for which it is requesting reduced monitoring.
 - c. Clearly state the justification for the reduction.

S8. DISCHARGES TO 303(D) OR TMDL WATER BODIES

If EPA approves an applicable **Total Maximum Daily Load** (TMDL) that includes wasteload allocations for WWTPs owned and operated by the Permittee Ecology will address any permit requirements related to the approved TMDL in the Permittee's individual permit or through a modification of this permit.

S9. REPORTING AND RECORDKEEPING REQUIREMENTS

A. DISCHARGE MONITORING REPORTS

Permittees required to conduct **water quality** sampling in accordance with Special Conditions S7, and/or G12 (Additional Monitoring) must submit the results to Ecology. Permittees must submit the monthly DMR by the 15th day of the following month.

Permittees must submit monitoring data using Ecology's WQWebDMR program.

B. MONITORING REQUIREMENTS

1. Wastewater Sampling Frequency

- a. The Permittee must sample both the influent and effluent discharge location at the frequencies listed in Condition S7.A, S7.B and S7.C.
- b. Samples must be representative of the flow and characteristics of the discharge.
- c. Sampling is not required outside of normal working hours or during unsafe conditions.

2. Wastewater Sampling Locations

Influent and effluent sampling locations must be representative. Permittees may use the compliance monitoring locations in their individual NPDES permit, prior to entry into waters of the state.

3. Wastewater Sampling Documentation

For each sample taken, the Permittee must record and retain the following information:

- a. Sample date and time
- b. Sample location
- c. Method of sampling, and method of sample preservation, if applicable
- d. Individual who performed the sampling

4. Where wastewater monitoring requirements under this Permit mirror requirements in a Permittee's individual permit, the same result may be applied to both permits.

5. Additional Monitoring by the Permittee

If the Permittee monitors any **pollutant** more frequently than required by this permit using test procedures specified by Condition S7, the Permittee must include the results of the extra monitoring in the calculation and reporting of the data submitted in the Permittee's DMR.

C. ANNUAL REPORT FOR DOMINANT LOADERS

1. No later than March 31 of each year, each Permittee listed in Table 5 must submit an Annual Report documenting optimization and the adaptive management used at their WWTP. The Permittee must submit their first annual report by March 31, 2023 for the reporting period that begins on January 1, 2022 and lasts through December 31, 2022. All subsequent Annual Reports must use the reporting period of the previous calendar year unless otherwise specified.
2. Permittees must submit Annual reports electronically using Ecology's Water Quality Permitting Portal (WQWebPortal) available on Ecology's website, unless otherwise directed by Ecology.
3. The Annual Report documenting the Nutrient Optimization Plan for Permittees listed in Table 5 must include the following:
 - a. Submittal of the Annual Report form as provided by Ecology pursuant to S4.C, describing the status of the requirements of this Permit during the reporting period.
 - b. Attachments to the Annual Report including summaries, descriptions, reports and other information as required, or as applicable, to meet the requirements of this Permit during the reporting period, or as a required submittal. Refer to Appendix C for Annual Report questions.
 - c. Certification and signature pursuant to G2.D and notification of any changes to authorization pursuant to G2.C.

D. ANNUAL REPORT FOR MODERATE LOADERS

1. No later than March 31 of each year, each Permittee listed in Table 8 must submit an Annual Report documenting optimization and the adaptive management used at their WWTP. The Permittee must submit their first annual report by March 31, 2023 for the reporting period that begins on January 1, 2022 and lasts through December 31, 2022. All subsequent Annual Reports must use the reporting period of the previous calendar year unless otherwise specified.
2. Permittees must submit Annual reports electronically using Ecology's Water Quality Permitting Portal (WQWebPortal) available on Ecology's website, unless otherwise directed by Ecology.
3. The Annual Report documenting the Nutrient Optimization Plan for Permittees listed in Table 8 must include the following:
 - a. Submittal of the Annual Report form as provided by Ecology pursuant to S5.C, describing the status of the requirements of this Permit during the reporting period.
 - b. Attachments to the Annual Report including summaries, descriptions, reports and other information as required, or as applicable, to meet the requirements of this Permit during the reporting period, or as a required submittal. Refer to Appendix D for Annual Report questions.

- c. Certification and signature pursuant to G2.D and notification of any changes to authorization pursuant to G2.C.

E. REPORTING FOR SMALL LOADERS

1. No later than March 31, 2026 each Permittee listed in Table 11 must submit an Optimization Report documenting optimization and the adaptive management used at their WWTP. The reporting period for this report will be from January 1, 2022 through December 31, 2025.
2. Permittees must submit the Nitrogen Optimization Report electronically using Ecology's Water Quality Permitting Portal (WQWebPortal) available on Ecology's website, unless otherwise directed by Ecology.
3. The electronic report documenting the optimization for Permittees listed in Table 11 must include the following:
 - a. Submittal of the Optimization Report form as provided by Ecology pursuant to S6.B, describing the status of the requirements of this Permit during the reporting period.
 - b. Attachments to the Optimization Report including summaries, descriptions, reports and other information as required, or as applicable, to meet the requirements of this Permit during the reporting period, or as a required submittal. Refer to Appendix E for Optimization Report questions.
 - c. Certification and signature pursuant to G2.D and notification of any changes to authorization pursuant to G2.C.

F. RECORDS RETENTION

The Permittee must retain records of all monitoring information (field notes, sampling results, etc.), optimization documents submitted with the annual or one-time report, and any other documentation of compliance with permit requirements for a minimum of five years following the termination of permit coverage. Such information must include all calibration and maintenance records, and records of all data used to complete the application for this permit. This period of retention must be extended during the course of any unresolved litigation regarding the discharge of pollutants by the Permittee or when requested by Ecology.

G. NONCOMPLIANCE NOTIFICATION

In the event the Permittee is unable to comply with any of the terms and conditions of this permit which may cause a threat to human health or the environment, including threats resulting from unanticipated *bypass* or upset, or does not comply with the narrative effluent requirements, the Permittee must:

1. Immediately, in no case more than 24 hours of becoming aware of the circumstances, notify Ecology of the failure to comply by calling the applicable regional office phone number (find at Ecology' [Report a Spill webpage](#)¹⁶).
2. Immediately take action to prevent the discharge/**pollution**, or otherwise stop or correct the noncompliance.
3. Submit a written report to Ecology using the WQWebPortal within five (5) days of the time the Permittee becomes aware of a reportable event. The report must contain:
 - a. A description of the noncompliance and its cause
 - b. The period of noncompliance including exact dates and times
 - c. If the noncompliance has not been corrected, the anticipated time it is expected to continue
 - d. Steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance

Ecology may waive the written report on a case-by-case basis upon request if the Permittee has submitted a timely oral report.

Compliance with these requirements does not relieve the Permittee from responsibility to maintain continuous compliance with the terms and conditions of this permit or the resulting liability for failure to comply. Refer to Section G13 of this permit for specific information regarding non-compliance.

H. ACCESS TO PLANS AND RECORDS

1. The Permittee must retain the following permit documentation (reports and monitoring records) on site, or within reasonable access to the site, for use by the operator or for on-site review by Ecology:
 - a. Permit Coverage Letter
 - b. Puget Sound Nutrient General Permit
 - c. Discharge Monitoring Reports
 - d. Attachments to the Annual or Single Report as required in the Nitrogen Optimization Plan (NOP)
 - e. Nutrient Reduction Evaluation for Permittees listed in Tables 5 and 8 or AKART Analysis for Permittees listed in Table 11

S10. PERMIT FEES

The Permittee must pay permit fees assessed by Ecology. Fees for wastewater discharges covered under this permit are established by Chapter 173-224 WAC.

¹⁶ <https://ecology.wa.gov/About-us/Get-involved/Report-an-environmental-issue/Report-a-spill>

GENERAL CONDITIONS

G1. DISCHARGE VIOLATIONS

All discharges and activities authorized by this general permit must be consistent with the terms and conditions of this general permit. Failure to follow the corrective action requirement after discharge of TIN at a level that exceeds the action level identified and authorized by the general permit constitutes a violation of the terms and conditions of this permit.

G2. SIGNATORY REQUIREMENTS

- A.** All permit applications must bear a certification of correctness to be signed:
1. In the case of corporations, by a responsible corporate officer;
 2. In the case of a partnership, by a general partner of a partnership;
 3. In the case of sole proprietorship, by the proprietor; or
 4. In the case of a municipal, state, or other public facility, by either a principal executive officer or ranking elected official.
- B.** All reports required by this permit and other information requested by Ecology must be signed by a person described above or by a duly authorized representative of that person. A person is a duly authorized representative only if:
1. The authorization is made in writing by a person described above and submitted to Ecology.
 2. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility, such as the position of plant manager, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters.
- C.** Changes to authorization. If an authorization under paragraph G2.B.2 above is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph G2.B.2 above must be submitted to Ecology prior to or together with any reports, information, or applications to be signed by an authorized representative.
- D.** Certification. Any person signing a document under this section must make the following certification:
- E.** "I certify under penalty of law, that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

G3. RIGHT OF INSPECTION AND ENTRY

The Permittee must allow an authorized representative of Ecology, upon the presentation of credentials and such other documents as may be required by law:

- A. To enter upon the premises where a discharge is located or where any records are kept under the terms and conditions of this permit.
- B. To have access to and copy – at reasonable times and at reasonable cost -- any records required to be kept under the terms and conditions of this permit.
- C. To inspect – at reasonable times – any facilities, equipment (including monitoring and control equipment), practices, methods, or operations regulated or required under this permit.
- D. To sample or monitor – at reasonable times – any substances or parameters at any location for purposes of assuring permit compliance or as otherwise authorized by the **Clean Water Act**.

G4. GENERAL PERMIT MODIFICATION AND REVOCATION

This permit may be modified, revoked and reissued, or terminated in accordance with the provisions of Chapter 173-226 WAC. Grounds for modification, revocation and reissuance, or termination include, but are not limited to, the following:

- A. When a change occurs in the technology or practices for control or abatement of pollutants applicable to the category of dischargers covered under this permit.
- B. When effluent limitation guidelines or standards are promulgated pursuant to the CWA or Chapter 90.48 RCW, for the category of dischargers covered under this permit.
- C. When a water quality management plan containing requirements applicable to the category of dischargers covered under this permit is approved, or
- D. When information is obtained that indicates cumulative effects on the environment from dischargers covered under this permit are unacceptable.

G5. REVOCATION OF COVERAGE UNDER THE PERMIT

Pursuant to Chapter 43.21B RCW and Chapter 173-226 WAC, the **Director** may terminate coverage for any discharger under this permit for cause. Cases where coverage may be terminated include, but are not limited to, the following:

- A. Violation of any term or condition of this permit.
- B. Obtaining coverage under this permit by misrepresentation or failure to disclose fully all relevant facts.
- C. A change in any condition that requires either a temporary or permanent reduction or elimination of the permitted discharge.
- D. Failure or refusal of the Permittee to allow entry as required in RCW 90.48.090.

- E. A determination that the permitted activity endangers human health or the environment, or contributes to water quality standards violations.
- F. Nonpayment of permit fees or penalties assessed pursuant to RCW 90.48.465 and Chapter 173-224 WAC.
- G. Failure of the Permittee to satisfy the public notice requirements of WAC 173-226-130(5), when applicable.

G6. COMPLIANCE WITH OTHER LAWS AND STATUTES

Nothing in this permit will be construed as excusing the Permittee from compliance with any applicable federal, state, or local statutes, ordinances, or regulations.

G7. DUTY TO REAPPLY

The Permittee must apply for permit renewal at least 180 days prior to the specified expiration date of this permit.

G8. TRANSFER OF GENERAL PERMIT COVERAGE

In the event of any change in control or ownership of facilities from which the authorized discharge emanate, the Permittee must follow the procedures listed in their individual NPDES permit when notifying Ecology.

G9. REMOVED SUBSTANCES

The Permittee must not re-suspend or reintroduce collected screenings, grit, solids, sludges, filter backwash, or other pollutants removed in the course of treatment or control of wastewater to the final effluent stream for discharge to state waters.

G10. DUTY TO PROVIDE INFORMATION

The Permittee must submit to Ecology, within a reasonable time, all information that Ecology may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The Permittee must also submit to Ecology, upon request, copies of records required to be kept by this permit [40 CFR 122.41(h)].

G11. OTHER REQUIREMENTS OF 40 CFR

All other requirements of 40 CFR 122.41 and 122.42 are incorporated in this permit by reference.

G12. ADDITIONAL MONITORING

Ecology may establish specific monitoring requirements in addition to those contained in this permit by administrative order or permit modification.

G13. PENALTIES FOR VIOLATING PERMIT CONDITIONS

Any person who is found guilty of willfully violating the terms and conditions of this permit shall be deemed guilty of a crime, and upon conviction thereof shall be punished by a fine of up to ten thousand dollars (\$10,000) and costs of prosecution, and/or by imprisonment in the discretion of the court. Each day upon which a willful violation occurs may be deemed a separate and additional violation.

Any person who violates the terms and conditions of a waste discharge permit shall incur, in addition to any other penalty as provided by law, a civil penalty in the amount of up to ten thousand dollars (\$10,000) for every such violation. Each and every such violation shall be a separate and distinct offense, and in case of a continuing violation, every day's continuance shall be deemed to be a separate and distinct violation.

G14. PROPERTY RIGHTS

This permit does not convey any property rights of any sort, or any exclusive privilege.

G15. DUTY TO COMPLY

The Permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.

G16. TOXIC POLLUTANTS

The Permittee must comply with effluent standards or prohibitions established under Section 307(a) of the Clean Water Act for toxic pollutants within the time provided in the regulations that establish those standards or prohibitions, even if this permit has not yet been modified to incorporate the requirement.

G17. PENALTIES FOR TAMPERING

The Clean Water Act provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than two years per violation, or by both. If a conviction of a person is for a violation committed after a first conviction of such person under this condition, punishment shall be a fine of not more than \$20,000 per day of violation, or imprisonment of not more than four (4) years, or both.

G18. REPORTING PLANNED CHANGES

Report planned changes in a manner consistent with the individual permit.

G19. REPORTING OTHER INFORMATION

Where the Permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to Ecology, it must promptly submit such facts or information.

G20. REPORTING ANTICIPATED NON-COMPLIANCE

The Permittee must give advance notice to Ecology by submission of a new application or supplement thereto at least one hundred and eighty (180) days prior to commencement of such discharges, of any facility expansions, or other planned changes, such as process modifications, in the permitted facility which may result in noncompliance with permit limits or conditions. Any maintenance of facilities, which might necessitate unavoidable interruption of operation and degradation of effluent quality, must be scheduled during non-critical water quality periods and carried out in a manner approved by Ecology.

G21. APPEALS

- A.** The terms and conditions of this general permit, as they apply to the appropriate class of dischargers, are subject to appeal by any person within 30 days of issuance of this general permit, in accordance with Chapter 43.21B RCW, and Chapter 173-226 WAC.
- B.** The terms and conditions of this general permit, as they apply to an individual discharger, are appealable in accordance with Chapter 43.21B RCW within 30 days of the effective date of coverage of that discharger. Consideration of an appeal of general permit coverage of an individual discharger is limited to the general permit's applicability or nonapplicability to that individual discharger.
- C.** The appeal of general permit coverage of an individual discharger does not affect any other dischargers covered under this general permit. If the terms and conditions of this general permit are found to be inapplicable to any individual discharger(s), the matter shall be remanded to Ecology for consideration of issuance of an individual permit or permits.

G22. SEVERABILITY

The provisions of this permit are severable, and if any provision of this permit, or application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit shall not be affected thereby.

G23. BYPASS PROHIBITED

This permit prohibits a bypass, which is the intentional diversion of waste streams from any portion of a treatment facility.

See bypass prohibitions included in each jurisdiction's individual NPDES permit.

APPENDIX A – DEFINITIONS

303(d) Listed Waters means waterbodies listed as Category 5 on Washington State’s Water Quality Assessment.

Action Level means an indicator value used to determine the effectiveness of best management practices at a WWTPs. Action levels are not water quality criteria or effluent limits by themselves but indicators of treatment optimization.

Adaptive Management means the process of incorporating new information into optimization implementation to ensure effective attainment of documented goals or the facility specific action level.

AKART means acronym for “all known, available, and reasonable methods of prevention, control, and treatment.” AKART represents the most current methodology that can be reasonably required for preventing, controlling, or abating the pollutants and controlling pollution associated with a discharge.

Alternative Restoration Plan means a near-term plan, or description of actions, with a schedule and milestones, that is more immediately beneficial or practicable to achieving water quality standards.

Applicant means an owner or **operator in responsible charge** seeking coverage under this permit.

Best Management Practices (BMPs) means schedules of activities, prohibitions of practices, maintenance procedures, and other physical, structural and/or managerial practices to prevent or reduce the pollution of waters of the State.

Bubbled action level means the sum of individual action levels for all WWTPs in the same discharger category under a single jurisdiction’s ownership.

Bypass means the intentional diversion of waste streams from any portion of a treatment facility.

Day means a period of 24 consecutive hours.

Clean Water Act (CWA) means the Federal Water Pollution Control Act enacted by Public Law 92-500, as amended by Public Laws 95-217, 95-576, 96-483, and 97-117; USC 1251 et seq.

Composite (also Composite Sample) means a mixture of grab samples collected at the same sampling point at different times, formed either by continuous sampling or by mixing discrete samples. May be "time-composite" (collected at constant time intervals) or "flow-proportional" (collected either as a constant sample volume at time intervals proportional to stream flow, or collected by increasing the volume of each aliquot as the flow increases while maintaining a constant time interval between the aliquots).

Director means the Director of the Washington Department of Ecology or his/her authorized representative.

Discharger means an owner or operator of any facility or activity subject to regulation under Chapter 90.48 RCW or the Federal Clean Water Act.

Domestic Wastewater means water carrying human wastes, including kitchen, bath, and laundry wastes from residences, buildings, industrial establishments, or other places, together with such ground water infiltration or surface waters as may be present.

Dominant loader means domestic WWTPs discharging more than 2,000 lbs/day TIN. Cumulatively, dominant loaders constitute > 80% of the domestic point source TIN load.

Ecology means the Washington State Department of Ecology.

Ground Water means water in a saturated zone or stratum beneath the land surface or a surface water body.

Greater Puget Sound Region means the marine area where human nutrient loads, from Washington Waters of the Salish Sea, contribute to waters not meeting marine DO standards. The GPS region include the Northern Bays (Bellingham, Samish, and Padilla Bays) as well as Puget Sound Proper, which are the marine waters south of the entrance of Admiralty Inlet (Whidbey Basin, Main Basin, South Sound, and Hood Canal).

Moderate loader means a domestic WWTP discharging between 100 and 2,000 lbs/day TIN. Cumulatively, moderate loaders constitute roughly 19 % of the domestic point source TIN load.

National Pollutant Discharge Elimination System (NPDES) means the national program for issuing, modifying, revoking and reissuing, terminating, monitoring, and enforcing permits, and imposing and enforcing pretreatment requirements, under sections 307, 402, 318, and 405 of the Federal Clean Water Act, for the discharge of pollutants to surface waters of the State from point sources. These permits are referred to as NPDES permits and, in Washington State, are administered by the Washington Department of Ecology.

Notice of Intent (NOI) means the application for, or a request for coverage under this general permit pursuant to WAC 173-226-200.

Operator means any individual who performs routine duties, onsite at a wastewater treatment plant that affect plant performance or effluent quality.

Operator in Responsible Charge means the individual who is designated by the owner as the person routinely onsite and in direct charge of the overall operation and maintenance of a wastewater treatment plant.

Optimization (also treatment optimization) means a best management practice (BMP) resulting in the refinement of WWTP operations that lead to improved effluent water quality and/or treatment efficiencies.

Outfall means the location where the site's wastewater discharges to surface water.

Overburdened community means a geographic area where vulnerable populations face combined, multiple environmental harms and health impacts, and includes, but is not limited to, highly impacted communities as defined in RCW 19.405.020.

Owner means a town or city, a county, a sewer district, board of public utilities, association, municipality or other public body.

Permittee means an entity that receives notice of coverage under this general permit.

Point source means any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, and container from which pollutants are or may be discharged to surface waters of the State. This term does not include return flows from irrigated agriculture.

Pollutant means dredged spoil, solid waste, incinerator residue, filter backwash, sewage, garbage, domestic sewage sludge (biosolids), munitions, chemical wastes, biological materials, radioactive materials, heat, wrecked or discarded equipment, rock, sand, cellar dirt, and industrial, municipal, and agricultural waste.

Pollution means contamination or other alteration of the physical, chemical, or biological properties of waters of the State; including change in temperature, taste, color, turbidity, or odor of the waters; or such discharge of any liquid, gaseous, solid, radioactive or other substance into any waters of the State as will or is likely to create a nuisance or render such waters harmful, detrimental or injurious to the public health, safety or welfare; or to domestic, commercial, industrial, agricultural, recreational, or other legitimate beneficial uses; or to livestock, wild animals, birds, fish or other aquatic life.

Receiving water means the water body at the point of discharge. If the discharge is to a storm sewer system, either surface or subsurface, the receiving water is the water body to which the storm system discharges. Systems designed primarily for other purposes such as for ground water drainage, redirecting stream natural flows, or for conveyance of irrigation water/return flows that coincidentally convey stormwater are considered the receiving water.

Representative sample (also **representative sampling**) means a wastewater sample which represents the flow and characteristics of the discharge. Representative samples may be a grab sample, a time-proportionate **composite sample**, or a flow proportionate sample.

Salish Sea means Puget Sound, Strait of Georgia, and Strait of Juan de Fuca, including their connecting channels and adjoining waters.

SEPA (State Environmental Policy Act) means the Washington State Law, RCW 43.21C.020, intended to prevent or eliminate damage to the environment.

Septage means, for the purposes of this permit, any liquid or semisolid removed from a septic tank, cesspool, vault toilet or similar source which concentrates wastes or to which chemicals have been added.

Site means the land where any "facility" is physically located.

Small Loader means a domestic WWTP discharging less than 100 lbs/day TIN. Cumulatively, small loaders constitute < 1% of the domestic point source TIN load.

Surface Waters of the State includes lakes, rivers, ponds, streams, inland waters, salt waters, and all other surface waters and water courses within the jurisdiction of the state of Washington.

Total Inorganic Nitrogen (TIN) means the sum of ammonia, nitrate, and nitrite. It includes dissolved and particulate fractions.

Total Maximum Daily Load (TMDL) means a calculation of the maximum amount of a pollutant that a water body can receive and still meet state water quality standards. Percentages of the total maximum daily load are allocated to the various pollutant sources. A TMDL is the sum of the allowable loads of a single pollutant from all contributing point and nonpoint sources. The TMDL calculations must include a "margin of safety" to ensure that the water body can be protected in case there are unforeseen events or unknown sources of the pollutant. The calculation must also account for seasonable variation in water quality.

Washington Waters of the Salish Sea means areas of the Salish Sea subject to Washington State's Water Pollution Control Act (Chapter 90.48 RCW)

Wasteload Allocation (WLA) means the portion of a receiving water's loading capacity that is allocated to one of its existing or future point sources of pollution. WLAs constitute a type of water quality based effluent limitation (40 CFR 130.2[h]).

Water quality means the chemical, physical, and biological characteristics of water, usually with respect to its suitability for a particular purpose.

Waters of the State includes those waters as defined as "waters of the United States" in 40 CFR Subpart 122.2 within the geographic boundaries of Washington State and "waters of the State" as defined in Chapter 90.48 RCW, which include lakes, rivers, ponds, streams, inland waters, underground waters, salt waters, and all other surface waters and water courses within the jurisdiction of the state of Washington.

Week (same as **Calendar Week**) means a period of seven consecutive days starting at 12:01 a.m. (0:01 hours) on Sunday.

APPENDIX B – ACRONYMS

AKART	All Known, Available, and Reasonable Methods of Prevention, Control, and Treatment
BMP	Best Management Practice
CFR	Code of Federal Regulations
CWA	Clean Water Act
DIN	Dissolved Inorganic Nitrogen
DMR	Discharge Monitoring Report
EPA	Environmental Protection Agency
FR	Federal Register
NOI	Notice of Intent
NOT	Notice of Termination
NPDES	National Pollutant Discharge Elimination System
NRP	Nutrient Reduction Plan
PSNF	Puget Sound Nutrient Forum
RCW	Revised Code of Washington
SEPA	State Environmental Policy Act
TBEL	Technology Based Effluent Limit
TIN	Total Inorganic Nitrogen
TMDL	Total Maximum Daily Load
USEPA	United States Environmental Protection Agency
WAC	Washington Administrative Code
WQ	Water Quality
WQBEL	Water Quality Based Effluent Limit
WWTP	Wastewater Treatment Plant

APPENDIX C – ANNUAL REPORT QUESTIONS FOR DOMINANT LOADERS

Permittees are required to submit annual reports online, pursuant to Special Condition S9.C.

1. Did your facility stay below the Action Level in S4.b, Table 5 or Table 6 for the jurisdiction with a bubbled action level? (S4.C.2.b.i)
 - a. Attach a document listing the contribution of each of your individual facilities to the total bubble allocation for the reporting period. (S4.C.2.b.i)
2. Did your facility stay below a 10 mg/L annual average TIN concentration? (S4.C.2.b.i) **(If Q1 = Y and Q2 = Y, then no further questions).**
3. **Attach** a document describing the assessment method applied to evaluate the existing treatment process. (S4.C.1.a)
4. What is your pre-optimization TIN removal rate, expressed as a percentage? (S4.c.1.a.i)
5. **Attach** a document explaining your initial approach for optimization. (S4.C.1.a)
6. Did you maintain and/or update your assessment approach after year 1?(S4.C.1.a.ii)
7. Do viable optimization strategies exist for your current treatment process? (S4.C.1.b)
8. Did all of the potential optimization strategies you identified and evaluated for S4.C.1.b have a reasonable implementation cost and timeframe? (S4.C.1.b)
9. ATTACH a document describing your preferred optimization strategy for implementation in 2022 (due July 1) (S4.C.1.c)
10. What is the expected performance for the selected optimization strategy? (S4.C.1.c)
11. **Attach** a document describing optimization plan implementation including start date, schedule for full implementation, initial costs, and challenges including impacts to other measures of treatment plant performance. (S4.C.2.a)
12. What TIN removal rate was observed during the reporting period? (S4.C.2.b.ii)
13. **Attach** a document describing your ongoing investigations to reduce influent TIN loads from septage handling practices, commercial, dense residential and industrial sources. (S4.C.3.a, S4.C.3.b)
14. **(If Q1=N and Q7 = Y) Attach** document including: factors causing the WWTP to not meet the optimization goal, whether modifications to the strategy could improve performance, and whether a different strategy or combination of strategies may be more appropriate. Also, document changes to the optimization strategy either through the selection of the new optimization strategy and new performance metric or existing implementation refinement. Revise the expected performance if electing to keep the existing strategy. Provide rationale for no changes if Permittee proposes no changes to the optimization strategy (S4.D.1.a and S4.D.1.b)
15. **(If Q1 = No and Q7 = No) Attach** abbreviated engineering report or technical memo (due 12 months after documenting action level exceedance or determination that no optimization strategies exist). (S4.D.2)

16. **(If Q1 = No in two prior years)** Did you implement the Engineering Report as planned, starting after Ecology's approval? (S4.D.2.a)
17. Did you submit the required Nutrient Reduction Evaluation on or before 12/31/2026? If no, **date** the document was or will be provided. (S4.E)
18. Did you submit discharge monitoring reports according to the required schedule? If no, **attach** a document describing/listing the missing records and corrective actions taken/or planned. (S7, S9.A)
19. Are you retaining all applicable records? If no, **attach** a document describing/listing the missing records and corrective actions taken and/or planned. (S9.F)
20. Did you follow non-compliance notification requirements? If no, **attach** a document describing the non-compliance and the corrective actions taken and/or planned. (S9.G)

APPENDIX D – ANNUAL REPORT QUESTIONS FOR MODERATE LOADERS

Permittees are required to submit annual reports online, pursuant to Special Condition S9.D.

1. Did your facility stay below the Action Level in S5.b, Table 8 or Table 9 for the jurisdiction with a bubbled action level? (S5.C.2.b.i)
 - a. Attach a document listing the contribution of each of your individual facilities to the total bubble allocation for the reporting period. (S5.C.2.b.i)
2. Did your facility stay below a 10 mg/L annual average TIN concentration? (S5.C.2.b.i) (**If Q1 =Y and Q2 = Y, then no further questions**).
3. **Attach** a document describing the assessment method applied to evaluate the existing treatment process. (S5.C.1.a)
4. What is your pre-optimization TIN removal rate, expressed as a percentage? (S5.c.1.a.i)
5. **Attach** a document explaining your initial approach for optimization. (S5.C.1.a)
6. Did you maintain and/or update your assessment approach after year 1?(S5.C.1.a.ii)
7. Do viable optimization strategies exist for your current treatment process? (S5.C.1.b)
8. Did all of the potential optimization strategies you identified and evaluated for S5.C.1.b have a reasonable implementation cost and timeframe? (S5.C.1.b)
9. ATTACH a document describing your preferred optimization strategy for implementation in 2022 (selection due July 1) (S5.C.1.c)
10. What is the expected performance for the selected optimization strategy? (S5.C.1.c)
11. **Attach** a document describing optimization plan implementation including start date, schedule for full implementation, initial costs, and challenges including impacts to other measures of treatment plant performance. (S5.C.2.a)
12. What TIN removal rate was observed during the reporting period? (S5.C.2.b.ii)
13. **Attach** a document describing your ongoing investigations to reduce influent TIN loads from septage handling practices, commercial, dense residential and industrial sources. (S5.C.3.a, S5.C.3.b)
14. (**If Q1=N and Q7 = Y**) **Attach** document including: factors causing the WWTP to not meet the optimization goal, whether modifications to the strategy could improve performance, and whether a different strategy or combination of strategies may be more appropriate. Also, document changes to the optimization strategy either thorough the selection of the new optimization strategy and new performance metric or existing implementation refinement. Revise the expected performance if electing to keep the existing strategy. Provide rationale for no changes if Permittee proposes no changes to the optimization strategy (S5.D.1.a and S5.D.1.b)
15. (**If Q1 = No and Q7 = No**) **Attach** abbreviated engineering report or technical memo (due 12 months after documenting action level exceedance or determination that no optimization strategies exist). (S5.D.2)

16. **(If Q1 = No in two prior years)** Did you implement the Engineering Report as planned, starting after Ecology's approval? (S5.D.2.a)
17. Did you submit the required Nutrient Reduction Evaluation on or before 12/31/2026? If no, **date** the document was or will be provided. (S5.E)
18. Did you submit discharge monitoring reports according to the required schedule? If no, **attach** a document describing/listing the missing records and corrective actions taken/or planned. (S7, S9.A)
19. Are you retaining all applicable records? If no, **attach** a document describing/listing the missing records and corrective actions taken and/or planned. (S9.F)
20. Did you follow non-compliance notification requirements? If no, **attach** a document describing the non-compliance and the corrective actions taken and/or planned. (S9.G)

APPENDIX E – ONE TIME REPORT QUESTIONS FOR SMALL LOADERS

Permittees are required to submit the single report online, pursuant to Special Condition S9.E.

1. **Attach** a document describing your initial assessment process, your optimization goal, the list of prioritized optimization strategies identified, and the strategy implemented in 2022 (S6.B.1.b). If any optimization strategies were found to not have a reasonable implementation cost or timeframe (S6.B.2.a.iv), include description of the feasibility and cost analysis that led to exclusion of any approach(es). (S6.B.1.a, S6.B.1.b)
2. Did your plant meet or exceed the pre-optimization empirical TIN removal rate in each year of this permit and also maintain or reduce TIN loads? If no, **attach** a document describing how you revised your optimization strategy in response to the evaluation in each of the prior permit years, and document your adaptive management steps, your assessment process, and the new optimization strategy or strategies you identified, and your updated optimization goal(s) and performance metric(s). (S6.B.2.b.ii, S6.B.2.c)
3. Did your facility stay below a 10 mg/L annual average TIN concentration? (S6.B.2.b.i) (**If Q2 = Y and Q3 = Y, then no further questions**)
4. What is your pre-optimization empirical TIN removal rate? (S6.B.1.a.i)
5. Did you maintain your reassessment approach after year 1? If no, **attach** a document describing assessment revisions that occurred each year over the permit term. (S6.B.1.a.ii)
6. What is your expected TIN removal with the preferred optimization strategy? (S6.B.1.b)
7. **Attach** a document describing optimization implementation including costs, time for full implementation, start date, challenges, and impacts to treatment performance. (S6.B.2.a)
8. What was the TIN removal rate observed each year during the reporting period? (S6.B.2.b.ii)
9. **Attach** a document describing your ongoing investigations to reduce influent TIN loads from septage handling practices, commercial, dense residential and industrial sources. (S6.B.3)
10. Did you submit the required AKART analysis on or before 12/31/2025? If no, **date** document was or will be provided. (S6.C)
11. Did you submit discharge monitoring reports according to the required schedule? If no, **attach** a document describing the missed monitoring activities and the corrective action taken. (S7, S9.A)
12. Are you retaining all applicable records? If no, **attach** a document describing the missing records and the corrective action taken and/or planned. (S9.F)
13. Did you follow non-compliance notification requirements? If no, **attach** a document describing the non-compliance and the corrective actions taken and/or planned. (S9.G)